illuma

lighting solutions



Inspired by light.
Mindful of our planet.

C/20

CI/SfB (63)X

See an illuma product you like and need more in-depth information?

1 Scan the QR code

on the catalogue product page to **find out more...**



OR

2 Type the web address

into your browser /



What you will get...

- Exact variant filters
- Product demo videos
- Technical data sheets
- Dimensional working drawings
- Installation images

Colour temperature /

The colour temperature corresponds to the light colour of a light source and is measured in Kelvin (K) /



2700K - Extra Warm White /
Similar feel to a traditional incandescent lamp. This colour is ideally suited to applications such as living rooms, bedrooms and restaurants.



3000K - Warm White /
Ideal for living areas, great for a cosy lighting atmosphere, giving a pleasant warm effect. This softer colour can be used in home lighting, galleries, retail stores, libraries and office areas.



4000K - Neutral White /
Great for general lighting, creating a cleaner, clinical, whiter light. This colour is often used in showrooms, leisure environments and office areas.



6000K - Pure White /
Pure white has blue tones and helps convey a sunny daylight type light that can be associated with pleasing outside conditions.

Colour rendering /

The colour rendering of a light source is an indicator of its ability to realistically reflect the colour of an object /

The effect of a light source on the perceived colour appearance to the human eye is expressed in the colour rendering index. Commonly known as CRI, it is based on a scale of 0-100 with the top value of 100 matching daylight.

The **photometric** code indicates both colour rendering and colour temperature. For example, 930 denotes CRI 90+ and 3000K.

930

CRI 90+ | 3000K col. temp.

Lumen output /

Lumen output is a measurement of the total quantity of visible light emitted by a light source. It's also commonly known as brightness or light output /

The lumen output, combined with the beam angle, is a measure of light spread from the source. Broader beam angles will result in more spread-out light, but the lumen output will also be less intense. Alternatively, narrower beam angles will have less spread but a higher light intensity.





About illuma / Lighting design by specification /

5 year guarantee

Rigorously tested products **delivering** long-term confidence /

For **45 years**, **illuma** has helped bring **lighting projects** to life, combining thoughtful design, technical performance and dependable quality /

As a **privately owned** British family business based in Castle Donington, we understand the importance of delivering the **right lighting solution.**

Our **UK manufacturing** expertise, knowledgeable technical support and extensive stockholding help architects, designers and contractors specify with confidence.

Sustainability is an increasingly important part of our approach, influencing how we develop products, select materials and plan for long term performance.

Why specify **illuma**?

45 years /
of lighting expertise.

Family-owned /
A long-term commitment to people, partnerships and progress.

UK manufacturer /
Based in Castle Donington, East Midlands.

Extensive stockholding /
Reliable stock availability to keep projects on track.

Technical support /
Responsive, industry-leading advice from specification to installation.

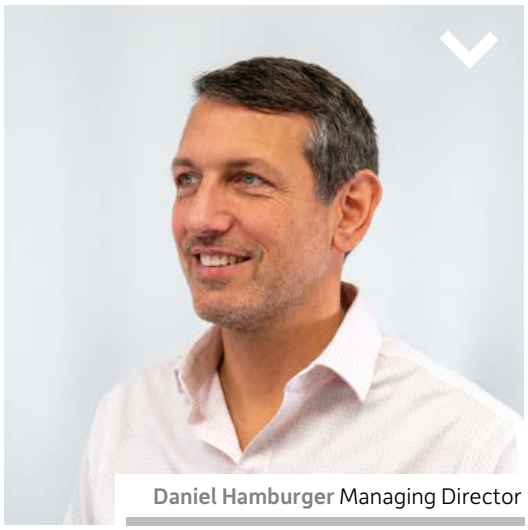

Daniel Hamburger Managing Director



Eric Riley Sales & Marketing Director

illuma

01

Sustainability

Inspired by **light** /

Mindful of our planet /

We are **committed** to reducing our environmental impact and creating long-term value through responsible choices, innovation and care for the world around us.

Circular responsibility /

We take responsibility for the **end-of-life** of our products through **WEEE** compliant recycling and responsible disposal.

Carbon neutral 2040 /

Our goal is to achieve carbon neutrality by 2040, balancing emissions with equivalent carbon removal and reduction measures.

Better by design /

Designed to use less energy, last longer, and support easy maintenance and upgrades throughout their lifecycle.

Responsible supply chain /

We **work** with partners who share our values and adhere to ethical and environmental standards.

Circular economy /

Detailed TM65 and TM66 reports, disassembly guidance and recycling instructions support responsible end-of-life management.

01

02 Quality /

Quality is at the core of everything we do /

From **product performance** to customer service, we strive for excellence at every step.

Rigorous testing | 5 year guarantee | Reliable support

ISO 9001:2015
LIA accredited
UKCA

Precision creates perfection /

Torp's advanced lens technology



Chameleon spotlight

03 Design /

We **create** lighting that enhances spaces and experiences /

Where **form** meets function, with purpose.

Purposeful aesthetics | Innovative solutions | User focused design | Future ready products

04 Manufacturing /

Proudly designed and built in the UK /

Our Midlands based **ISO accredited** facility and skilled team ensure precision, efficiency and care.

UK designed & built | Precision Engineering | Advanced facilities | Built to last



illuma

illuma
3D PRINTED

Additive by design /

3D printed components that are tailored to your project /





Lighter materials
Less waste
More possibilities









3D PRINTED

From digital to finished form /



Bringing bespoke lighting to life /

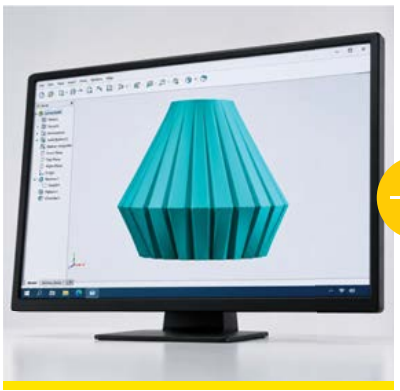

From **concept** to a print-ready design, refined for performance, aesthetics and manufacturability

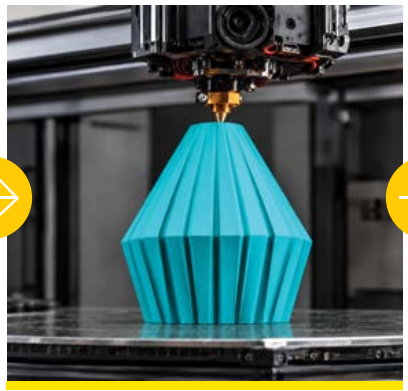

Turn **ideas** into reality quickly with in-house 3D printing and fast iteration



A **range** of styles, colours and finishes to suit your space, from bold & expressive to refined and elegant

No minimum order quantities /

Any order quantity can be fulfilled

Bespoke solutions /

Fully customisable for your project

Less waste /

Reduced material waste

Customisable /

Custom shapes, colours and finishes

illuma

Expertise in lighting is a team effort /

We're a privately owned **family business**, and **people** are a part of everything we do /

Our team brings together lighting design, technical expertise, product innovation, stock availability, quality assurance and customer service - supporting your project from concept to completion.



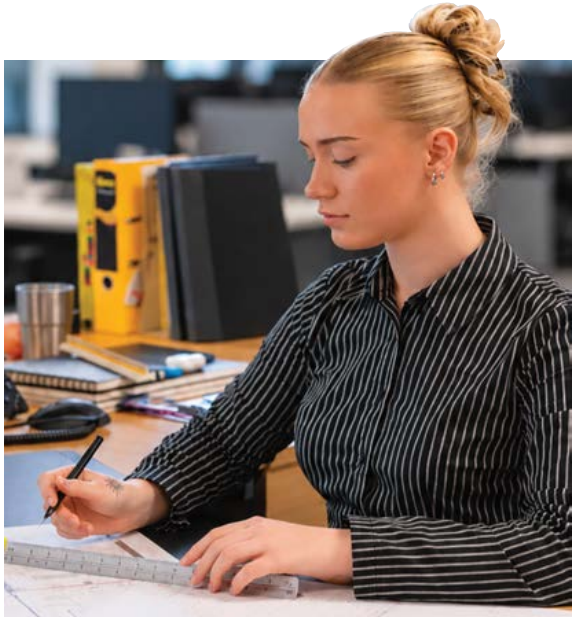

Lighting design /
Creative lighting solutions that bring your vision to life.

Product development /
Shaping high-performing products through a holistic blend of usability, efficiency and sustainability.

Whether you're an architect, interior designer or electrical contractor, you can rely on our people for clear advice, practical solutions and genuine support. We take the time to understand your project, combine creative thinking with technical knowledge, and work together to help you achieve exceptional spaces with light.

bringing your vision to life.

The people behind brighter spaces





Technical expertise /
Practical and impartial advice at every stage of your project.

The people who turn your ideas into reality /

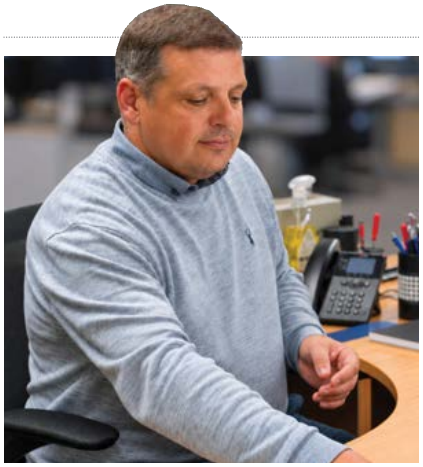

Quality assurance /
Rigorous checks to ensure every product meets the highest standards.

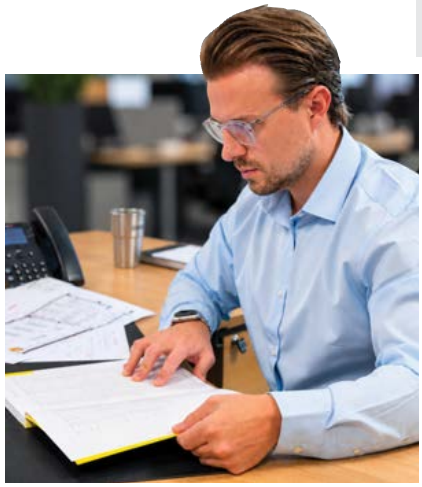

Area Managers /
Expert advice, site surveys and product demonstrations.

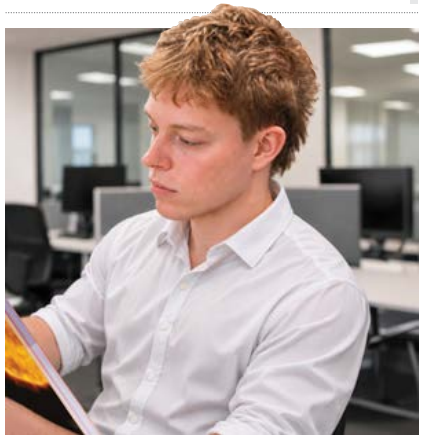

Five-year guarantee /
Confidence in quality, with products built to perform.

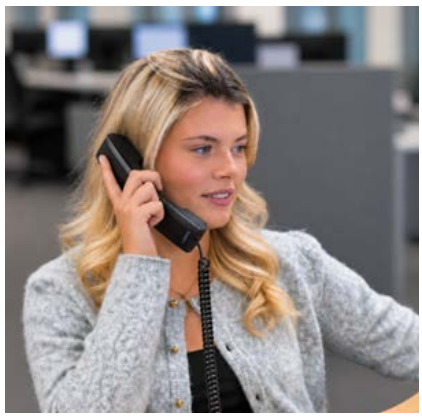

Sales support /
A **dedicated** team to help with product selection, pricing and specifications.



Customer service /
Friendly and knowledgeable support from real people.



High stock levels /
A **wide** range of products ready for quick delivery.



Project delivery /
Working with you from concept to completion for a smooth, successful outcome.

illuma

Lighting design /

Creating atmosphere, enhancing architecture, making light work beautifully /

Our **lighting designs** balance atmosphere with the practical application of light.

Lighting should not be seen as a functional solution, but instead as an intrinsic part of the experience /



Start your FREE lighting design /

Send us your plans & project brief

← **illuma** / lighting design

For additional project enquiries, please speak to our sales desk on 01332 818 200 or email lightingdesign@illuma.co.uk

Collaborative /

We work with you every step of the way

Technical expertise /

Product knowledge and design insight

Visual confidence /

3D renders and realistic previews

Practical delivery /

Clear specifications for a smooth outcome

FREE site surveys /

Site surveys with experienced lighting experts

Calculate /

Accurate lighting calculations /

Giving you confidence in performance, compliance and the final outcome /

LIA certified | Emergency lighting | Lighting calculations | Energy conscious

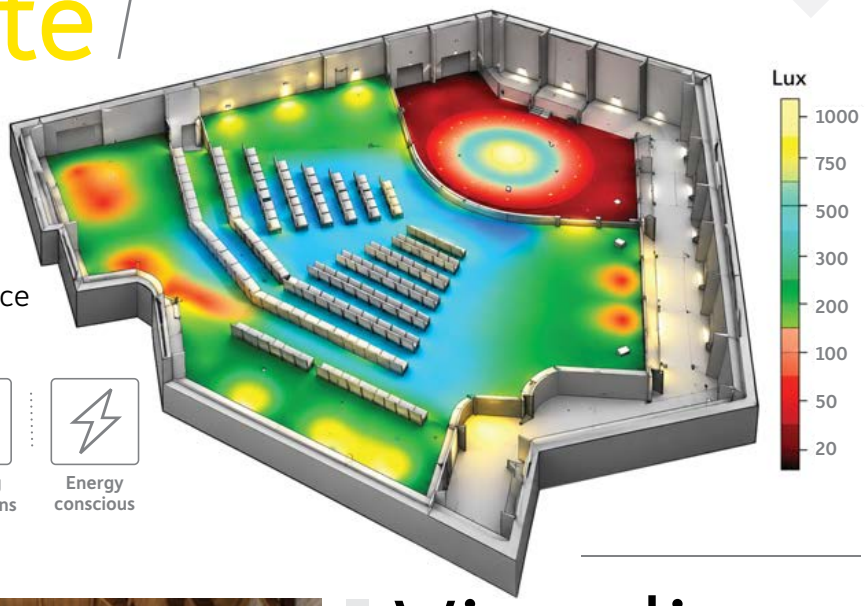



Detailed ray tracing images

Visualise /

Detailed 3D renders and HD walkthroughs /

Helping you to see the lighting scheme before installation, ensuring every detail works as intended /

3D renders | HD walkthroughs | Detailed floor plans

Deliver /

From concept to reality /

Our free lighting design service takes your project through calculation, visualisation and specification to completion /

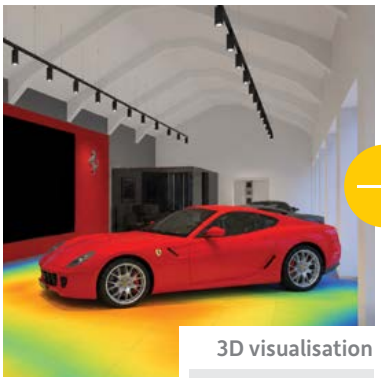

3D visualisation

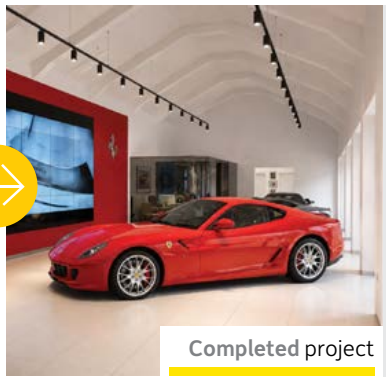

Completed project

Brief → Site visit → Design → Calculate → Visualise → Specify → Deliver

Contents

Spotlights

Pages 20-57


Vent 22


Torp 26


Concepta 28


Probeam Frame 40


Probeam Frame Mini 42


Probeam 44


Twinlux 46

Linear

Pages 58-79


Linia Blade S 60


Linia Blade T 64


Linia Blade R 66


Grazr 72


Floodline 74


Quadroled Linear 76


Quadroled 78

Track Systems

Pages 80-93


CLEVR 84


1-Circuit Track 230V 86


3-Circuit Track 230V 88

Project Downlights

Pages 94-109


Twizzle LED 96


Project 90 Open 98


Project 90 Cone 100



Concepta Maxi 30



Chameleon 32



Robospot 34



Reflecto 36



Probeam Select 38



Ellipsa 48



Lumapar 50



Lumapar GU10 52



Rocket E27 54



Topspot E27 56



Fluoresa 68



Cubix 70



3-Circuit Track 230V Recessed 88



Control Track 230V 90



Control Track 230V Recessed 90



Track Polarity 92



Project 90 Gimbal 102



Project 90 Wallwash 104



Proseal F 106



Fire Hoods 108

Contents *continued*

Commercial downlights

Pages 110-135



Infinia 112



Infinia Mini 116



Arc 118



Highlux Surface 126



Hexseal 128



Unilux 130



Lightseal 132

3D Ceiling Adaptor Ring 134

Feature

Pages 136-151



Ambit 138



2ube Pendant 140



2ube Pendant Shades 142

Exterior

Pages 152-161



Signspot 154



Covert 156



Terrazzo 158

Emergency

Pages 162-175



Emlux Duo 164



Emlux Slim 166



Emlux Blade 168



Framelight 120



Highlux Fixed 122



Highlux Gimbal 124

Prismalo 144

Disk Pendant 146



Disk Wall 146



Uniseal 148



Upline 150



SignLED 160



Emlux Discrete 170



Emlux Twinspot 172



Emlux Sign 174

Mounting options

The **right** mounting choice / **bringing** light to your space /





Standard trim



Trimless



Ceiling Adaptor Ring

Multiple mounting options for complete project flexibility /

Designed to **compliment** both architectural vision and installation requirements, the right mounting solution ensures optimal lighting performance and a seamless finish.



Recessed
Seamlessly integrated for a clean ceiling.



Surface mounted
Ideal where no ceiling void exists.



Suspended
Perfect for feature and high ceilings.

Which mounting option is right for your project?

	Recessed	Surface	Suspended
Clean, integrated appearance	●	○	○
No ceiling void available	○	●	○
Suitable for wall mounting	○	●	○
Ideal for high ceilings	○	○	●

Recessed /

A **recessed luminaire** is fitted within the ceiling to provide a seamless, integrated look. It is commonly specified where a clean, minimalist architectural aesthetic is desired /

Why choose Recessed?
- Discreet, uncluttered ceiling appearance
- Choice of round, square or rectangular trims
- Perfect for refined modern interiors

Things to consider
- Requires a ceiling void
- Position of hidden joists and pipes
- Choose trim or trimless to suit your ceiling finish
- Ceiling adaptor rings (see p134) are available for larger hole cut-outs







Surface mounted



Wall mounted



Suspension wires



Suspended track systems

Surface mounted /

Surface mounted lighting is a practical installation solution, offering a clean and aesthetically pleasing finish /

Why choose Surface?
- No ceiling void available
- Simple and efficient installation
- Wall or ceiling mounted solutions
- Suitable for internal and external use (luminaire dependant)

Things to consider
- Choose a style that complements the architecture
- Ideal where practicality and flexibility are key

Suspended /

Suspended luminaires or suspended track bring the light source lower into a room, making them ideal for high ceilings, task areas and feature spaces /

Why choose Suspended?
- Ideal for high ceilings
- Great for task lighting and feature applications
- Wide range of styles and formats

Things to consider
- Requires suspension wires or rods
- Fixing points and alignment should be considered early
- Consider the overall space and visual balance

Track mounted systems /

Track systems can be surface mounted, recessed or suspended / For more details go to pages 80-93





Track adaptors

14 Adaptor formats for different track systems

Technical details & dimensions for each adaptor are shown below.
Full track compatibility can be found on the opposite page.

1



Illuma S or SDL or SDS

For use with **Illuma 1-Circuit 230V** Track / (see page 86).

2



Global G1 or G1DL or SDG1

For use with **Global Trac Base 1 Circuit** Track / **Concord Lytespan 1** & **Lytespan LP** Tracks / (Note: not compatible with **Illuma 1-Circuit 230V** Track).

3



Global G3 or GDL or SDG

For use with **Illuma 3-Circuit 230V** Track & **3-Circuit 230V Recessed** Track / (see page 88) & many other European brands.

4



Concepta SDL

For use with **Illuma 1-Circuit 230V** Track / (see page 86).

5



Concepta GDL

For use with **Illuma 3-Circuit 230V** Track & **3-Circuit 230V Recessed** Track / (see page 88) & many other European brands.

6



Illuma GDL

For use with **Illuma 3-Circuit 230V** Track & **3-Circuit 230V Recessed** Track / (see page 88) & many other European brands.

7



Vossloh GDD

● DALI-2 Dimmable

For use with **Illuma Control Track 230V** & **Control Track 230V Recessed** / (see page 90) & many other European brands.

8



HEP GDD

● DALI-2 Dimmable

For use with **Illuma Control Track 230V** & **Control Track 230V Recessed** / (see page 90) & many other European brands.

9



Global GDD

● DALI-2 Dimmable

For use with **Illuma Control Track 230V** & **Control Track 230V Recessed** / (see page 90) & many other European brands.

10



Osram GDC

● Casambi Dimmable

For use with **Illuma 3-Circuit 230V** Track & **3-Circuit 230V Recessed** Track / (see page 88) & many other European brands.

11



Illuma Chameleon

For use with **Illuma 3-Circuit 230V** Track & **3-Circuit 230V Recessed** Track / (see page 88) & many other European brands.

Adaptor Compatibility Matrix

Find the right adaptor for your product

12



Osram Invisible

For use with **Illuma 3-Circuit 230V** Track & **3-Circuit 230V Recessed** Track / (see page 88) & many other European brands.

13



Illuma Self Dim

For use with **Illuma 3-Circuit 230V** Track & **3-Circuit 230V Recessed** Track / (see page 88) & many other European brands.

14



Vossloh Quadroled

For use with **Illuma 3-Circuit 230V** Track & **3-Circuit 230V Recessed** Track / (see page 88) & many other European brands.

	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Product	ILLUMA	GLOBAL	GLOBAL	CONCEPTA	CONCEPTA	ILLUMA	VOSSLOH	HEP	GLOBAL	OSRAM	ILLUMA	OSRAM	ILLUMA	VOSSLOH
	S / SDL / SDS	G1 / G1DL / SDG1	G3 / GDL / SDG	SDL	GDL	GDL	GDD	GDD	GDD	GDC	Chameleon	Invisible	Self Dim	Quadroled
Vent						●	●			●				
Vent Customisation						●	●			●				
Torp	●	●	●				●			●				
Concepta				●	●		●			●				
Concepta Maxi				●	●		●			●				
Chameleon											●			
Robospot			●											
Reflecto						●	●			●				
Probeam Select	●		●				●			●				
Probeam Frame			●				●			●				
Probeam Frame Mini							●			●			●	
Probeam	●	●	●				●			●				
Twinlux								●						
Ellipsa												●		
Lumapar	●	●	●											
Lumapar GU10	●	●	●											
Rocket	●	●	●											
Topspot	●	●	●											
Linia Blade S			●						●					
Cubix						●	●			●				
Grazr						●	●			●				
Floodline	●	●	●						●					
Quadroled Linear														●
Quadroled			●											
2ube Pendant	●	●	●				●			●				
2ube Pendant Shades	●	●	●				●			●				
Disk						●	●			●				
Emlux Duo			●						●					
Emlux Blade			●											
Emlux Twinspot			●						●					

Spotlights

Working alongside OR Consultancy, **Illuma**'s **Concepta** spotlights provided the ideal lighting solution, combining precision, versatility and performance to complement the **NinetyThird club**'s striking contemporary interior.

Industry case study /

The NinetyThird by Qatar Airways

The O2 Arena / London, UK

The O2 Arena's exclusive VIP members' club, The NinetyThird by Qatar Airways, brings a new level of luxury to one of London's most iconic entertainment venues / Accommodating up to 300 guests, the space features a premium restaurant, stylish bars and a unique retractable viewing platform, all inspired by **The O2's** rich musical heritage.

Throughout the venue, **Illuma** have carefully positioned **Concepta spotlights** bringing artwork, architectural details and key features to life.

In the dining areas, **Concepta**'s focused beams create dramatic pools of light across the glossy tables, introducing depth, contrast and a theatrical atmosphere that reflects the club's distinctive character.

The project also presented several technical challenges, including a complex **3-Circuit Track** layout, varied dimming requirements and a curved rear wall. **Illuma**'s expertise in track polarity, combined with flexible connectors and carefully selected dimming solutions, ensured a seamless installation without compromising the lighting design.

The result is a sophisticated and adaptable spotlight scheme that showcases **Concepta**'s versatility, enhancing the luxurious interior and creating a memorable experience for guests.

> It's been a privilege to contribute to such a prestigious project in one of London's most iconic venues. Seeing the space come to life with **Illuma** lighting and complement the stunning interior has been incredibly rewarding / **Steve Knight, Illuma's Area Sales Manager**

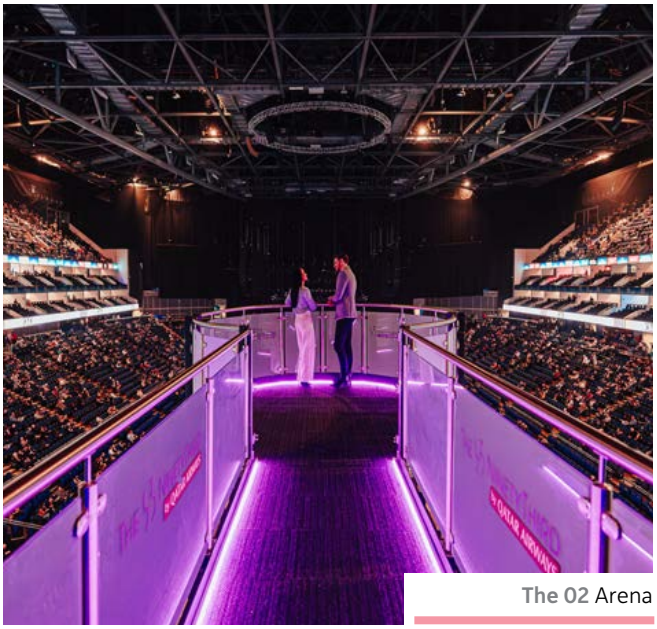

The O2 Arena



The NinetyThird

Spotlights product range

03

A contemporary range of highly innovative spotlights, ideal for applications that require a flexible solution.



Vent 22



Torp 26



Concepta 28



Concepta Maxi 30



Chameleon 32



Robospot 34



Reflecto 36



Probeam Select 38



Probeam Frame 40



Probeam Frame Mini 42



Probeam 44



Twinlux 46



Ellipsa 48



Lumapar 50



Lumapar GU10 52



Rocket E27 54



Topspot E27 56

Vent

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/vent**

A contemporary spotlight range available in multiple lumen outputs with advanced optical control. Ideal for retail, hospitality & commercial environments requiring flexibility, performance and a refined architectural appearance.



Vent comes in a range of options to suit any installation:



White option



Black option



Alanod reflector



Can be **aimed** vertically



Discreet heat sink



Side profile

Options available:

Lumen output

Selectable
1800 2000 2300 2500
2800 3100 3400 3600

Colour temperature

2700K 3000K
4000K Polar white

Body colour

White
Black

Beam angles

24° 38° 60°

Body size

1 size

Track mount

Vertical mount

Specification:

LED chip / CRI

Illuma
CRI >90

Adjustable

IP rating

IP 20

Dimming options

DALI 2
Casambi
Leading & trailing edge

03



Vent

Designer Fashion Village / Somerset, UK

This flagship store blends traditional British tailoring with modern menswear collections in a refined retail setting. Vent delivers discreet, visually comfortable illumination that reveals fabric textures, colour and craftsmanship whilst supporting an elevated shopping experience.

Vent customisation



3D PRINTED

Your **Vent** / **Your** way

Custom options for your Vent /

Create a look that's unique to your project /

Made in the UK
from PLA Bio-Polymer

Choose your colour /

Choose your ring /

Choose your design /

Enjoy your customised Vent /

Endless possibilities to **match** your space /

From **bold statement** designs to subtle, refined finishes, we can design a customised solution that works for your project /

illuma
3D PRINTED



Make Vent yours /

01 Select your colour finish

Choose a standard colour or specify a custom colour.



02 Select your ring style

Choose from 5 distinctive ring styles or specify a custom design.



03 Select your decorative sleeve

Choose from 5 different sleeve designs or specify a custom style.



Torp

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/torp**

A sleek cylindrical spotlight range available in five lumen outputs and four beam angles with a CRI of 98. Ideal for retail and display applications requiring exceptional colour rendition and a clean architectural aesthetic.



*Additional sizes available

	lm	Length	Dia.
S	500	130	60
M	1100	152	70
L	1900	184	85
XL	2800 / 3500	218	100

Torp comes in a range of options to suit any installation:



Anti-glare option



Honeycomb louvre option



Advanced lens technology



Can be **aimed** vertically



Discreet heat sink



Standard option

Options available:

Lumen output
500 1100 1900 2800 3500

Colour temp.
3000K
4000K

Body colour
White
Black

Track mount

Style options
Anti-glare
Honeycomb
Standard

Beam angles
15° 24° 38° 60°

Recessed mono

Surface mount

Vertical mount

Specification:

LED chip / CRI
Luminus CRI 98

Adjustable

IP rating
IP 20

Anti-glare

Dimming options
DALI 2
Casambi
Leading & trailing edge

03

Torp



Meridien Modena / Southampton, UK

Meridien Modena showcases an exceptional collection of high-performance sports cars within a meticulously curated showroom. Torp's exceptional 98CRI performance reveals the depth, finish and craftsmanship of every vehicle, creating a dramatic and engaging display.

Concepta

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/concepta**

This versatile spotlight is Illuma's most energy-efficient range to date. Crafted from sustainable materials, Concepta delivers excellent performance and a contemporary design for a wide range of architectural applications.

Custom colours

Custom colour finishes available on request



Vertical tilt 90°
Horizontal rotation 355°

Concepta comes in a range of options to suit any installation:



White option



Black option



Advanced lens technology



Can be **aimed** vertically



Discreet heat sink



Side profile

Options available:

Lumen output
2 output versions
Low / High
1000 / 2500
1500 / 3000
2000 / 3500
3 selectable settings each

Beam angles
15° 24°
38° 60°

Colour temp.
2700K
3000K
4000K

Body colour
White
Black

Track mount

Recessed mono

Surface mount

Vertical mount

Accessories
Honeycomb & Barndoor

Specification:

LED chip / CRI
Luminus
CRI >90

Adjustable

IP rating
IP 20

Anti-glare

Dimming options
DALI 2
Casambi
Leading & trailing edge



03

Concepta

Sunspel / London, UK

Sunspel's understated interior reflects a heritage of British craftsmanship, with garments featured in both James Bond and Batman productions. Concepta delivers excellent colour rendering, revealing fabric textures and subtle material details throughout the store.

Concepta Maxi

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/concepta-maxi**

A powerful high-output spotlight developed for installations with elevated mounting heights. Ideal for churches, atriums, galleries and large retail environments where controlled illumination over greater distances is required.

Custom colours

Custom colour finishes available on request

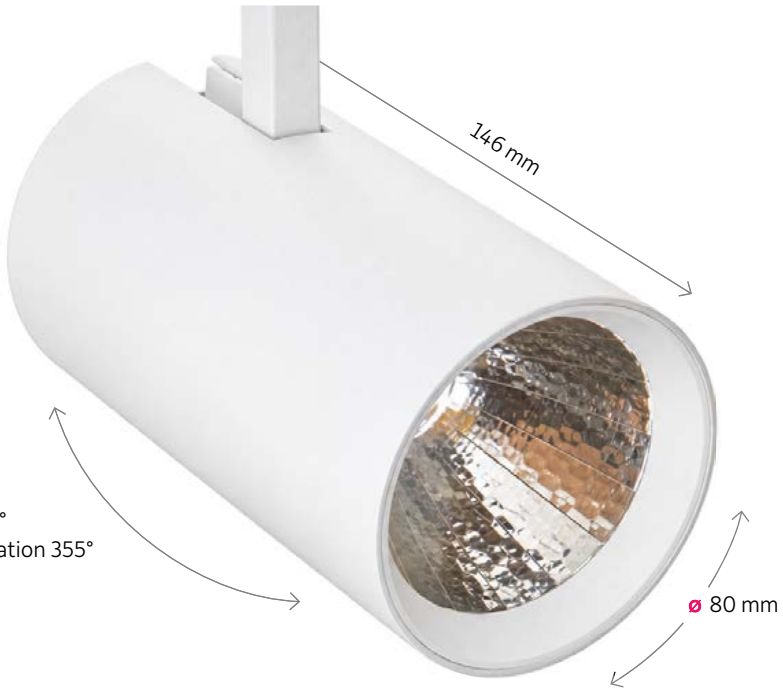

Vertical tilt 90°
Horizontal rotation 355°

Concepta Maxi comes in a range of options to suit any installation:



Crystal cone reflector



Black option



High efficiency reflector



Can be **aimed** vertically



Discreet heat sink



Side profile

Options available:

Lumen output
4500

Colour temp.
2700K
3000K
4000K

Body colour
White
Black

Track mount

Beam angles
24° 38°

Body size
1 size

Surface mount

Vertical mount

Specification:

LED chip / CRI
Bridgelux
CRI >90

Adjustable

IP rating
IP 20

Dimming options
DALI 2
Casambi
Leading & trailing edge

03

Concepta Maxi

St. Michael's Church / Surrey, UK

St Michael's Church combines historic architecture with the practical demands of a modern place of worship. Concepta Maxi provides comfortable, carefully balanced illumination that highlights architectural features whilst supporting services, events and community use.

Chameleon

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/chameleon**

A sleek cylindrical spotlight featuring intelligent spectral tuning technology that automatically optimises colour rendition according to the illuminated surface. Ideal for premium retail and display environments.



Vertical tilt 90°
Horizontal rotation 355°

Chameleon comes in two colour options to suit any installation:



White option



Black option



Advanced AI technology



Can be **aimed** vertically



Discreet heat sink



Side profile

Options available:

Lumen output: 2300
Colour temp.: Adaptive
Body colour: White / Black
Vertical mount
Beam angles: 24° 38° 60°
Body size: 1 size
Track mount

Specification:

LED chip / CRI: Illuma CRI >95
Adjustable
IP rating: IP20
Anti-glare



03

Chameleon

Liberty / London, UK

Liberty's iconic interiors combine distinctive heritage architecture with carefully selected luxury collections. Chameleon provides precision illumination that elevates merchandise presentation whilst complementing the craftsmanship and character that define this landmark destination.

Robospot

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/robospot**

An innovative spotlight with integrated Casambi technology, enabling remote control of beam angle, aiming position, colour temperature and dimming. Ideal for dynamic retail, gallery and exhibition environments.

Controlled with CASAMBI



Vertical tilt 90°
Horizontal rotation 360°

Robospot comes in two colour options to suit any installation:



White option



Black option



Advanced lens technology



Can be **aimed** vertically



Discreet heat sink



Side profile

Options available:

Lumen output: 1500

Colour temp.: Tuneable 2700-6500K

Body colour: White / Black

Track mount

Beam angles: 18 to 60°

Body size: 1 size

Surface mount

Specification:

LED chip / CRI: Illuma CRI >95

Adjustable

IP rating: IP20

Variable beam

Dimming: Casambi



03

Robospot

Velour Gallery / London, UK

Velour Gallery presents contemporary artwork within a flexible exhibition space designed to evolve between installations. Robospot allows lighting scenes to be adjusted with precision, ensuring every exhibition is presented exactly as intended.

Reflecto

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/reflecto**

A distinctive spotlight combining direct and reflected illumination to enhance visual comfort and reduce glare. Ideal for retail, hospitality and commercial applications seeking a decorative lighting effect.

Custom colours

Custom colour finishes available on request



Vertical tilt 90°
Horizontal rotation 355°

Reflecto comes in three colour options to suit any installation:



Black option



White option



Indirect reflector



Can be **aimed** vertically



Clean aesthetic



Side profile

Options available:

Lumen output
850

Colour temp.
2700K
3000K

Body colour
White
Black

Ring colours
White
White
Cobalt Blue

Track mount

Vertical mount

Beam angles
15° 24° 38°

Body size
1 size

Specification:

LED chip / CRI
Illuma CRI >90

Adjustable

IP rating
IP 20

In-Direct

Dimming options
DALI 2
Casambi
Leading & trailing edge



03

Reflecto

Stone & Surface Studio / Manchester, UK

Stone & Surface Studio showcases an extensive collection of porcelain, ceramic and natural stone finishes. Reflecto delivers controlled illumination that reveals texture, colour variation and material quality, helping visitors fully appreciate every display.

Probeam Select

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/probeam-select**

A highly adaptable spotlight offering five colour temperatures, variable beam control and CRI >95. Designed for galleries, museums and display environments requiring maximum post-installation flexibility.

Selectable colour temperature:

2700K
3000K
4000K
5000K
6000K



Probeam Select is perfect for highlighting defined areas:



White body



With **Honeycomb** accessory



Distinctive optic



Can be **aimed** vertically



Simple to use controls



Selectable CCT & self-dim

Options available:

Lumen output	Colour temp.	Body colour	Track mount
2000	Selectable 2700-6000K	White / Black	

Beam angles	Body size	Surface mount	Vertical mount
15 to 60°	1 size		

Specification:

LED chip / CRI	Adjustable	Anti-glare	Dimming options
CREE CRI >90			DALI 2, Casambi, Self dimmable

IP rating	Variable beam	Accessories
IP20		Honeycomb



03

Probeam Select

Oréline Fragrance & Fashion / London, UK

Oréline blends luxury fashion and artisan fragrances within a sophisticated retail setting designed to engage the senses. Probeam Select provides flexible accent lighting that showcases key collections whilst creating a refined and immersive customer experience.

Probeam Frame

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/probeam-frame**

A framing spotlight enabling the precise projection of geometric shapes and sharply defined light patterns. Ideal for galleries, exhibitions and architectural applications requiring focused visual emphasis.



Probeam Frame is perfect for highlighting defined areas:



White body



Adjustable optic



Can be **aimed** vertically



Self-dim option



Four point frame adjust

Options available:

Lumen output	Colour temp.	Body colour	Track mount
600	3000K / 4000K	White / Black	

Beam angles	Body size	Surface mount	Vertical mount
3 to 45°	1 size		

Specification:

LED chip / CRI	Adjustable
CREE CRI >90	

IP rating	Variable beam
IP20	

Dimming options

DALI 2

Casambi

Self dimmable

03

Probeam Frame

Taunton School Chapel / Taunton, UK

Taunton School Chapel serves as a venue for worship, performances and school events within a beautiful historic setting. Probeam Frame highlights architectural focal points with precision, creating visual hierarchy whilst maintaining a balanced atmosphere.

Probeam Frame Mini

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/probeam-frame-mini**

A miniature framing spotlight designed for precise accent lighting and image projection. Ideal for display cabinets, galleries and museum installations where a discreet yet highly controllable solution is required.



Probeam Frame Mini is perfect for highlighting defined areas:



White body



Self-dim option



Adjustable mini optic



Can be **aimed** vertically



Clean aesthetic



Gobo facility

Options available:

Lumen output: 300

Colour temp.: 3000K

Body colour: White / Black

Track mount

Beam angles: 15 to 36°

Surface mount

Vertical mount

Recessed

Specification:

LED chip / CRI: Citizen CRI >90

Adjustable

Anti-glare

IP rating: IP20

Variable beam

Dimming: Self dimmable

Dimming options: DALI 2, Casambi, Leading & trailing edge

03

Probeam Frame Mini



Taunton School Chapel / Taunton, UK

Integrated discreetly within the chapel interior, Probeam Frame Mini draws attention to key architectural details and liturgical features. Its compact form delivers strong visual impact whilst preserving the character and integrity of the space.

Probeam

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/probeam**

This variable beam spotlight has been developed specifically for ever-changing environments including galleries, museums, retail spaces and display applications where flexibility and precision are essential.



Probeam provides accurate and effective beam control:



Black body



Adjustable beam (15 to 90°)



Adjustable optic



Can be **aimed** vertically



Clean aesthetic



Self-dim version

Options available:

Lumen output	Colour temp.	Body colour	Track mount
1000	3000K / 4000K	White / Black	

Beam angles	Body size	Surface mount	Vertical mount
15 to 90°	1 size		

Specification:

LED chip / CRI	Adjustable
CREE CRI >90	

IP rating	Variable beam
IP20	

Dimming options

Casambi

DALI 2

Leading & trailing edge

Self dimmable

03

Probeam

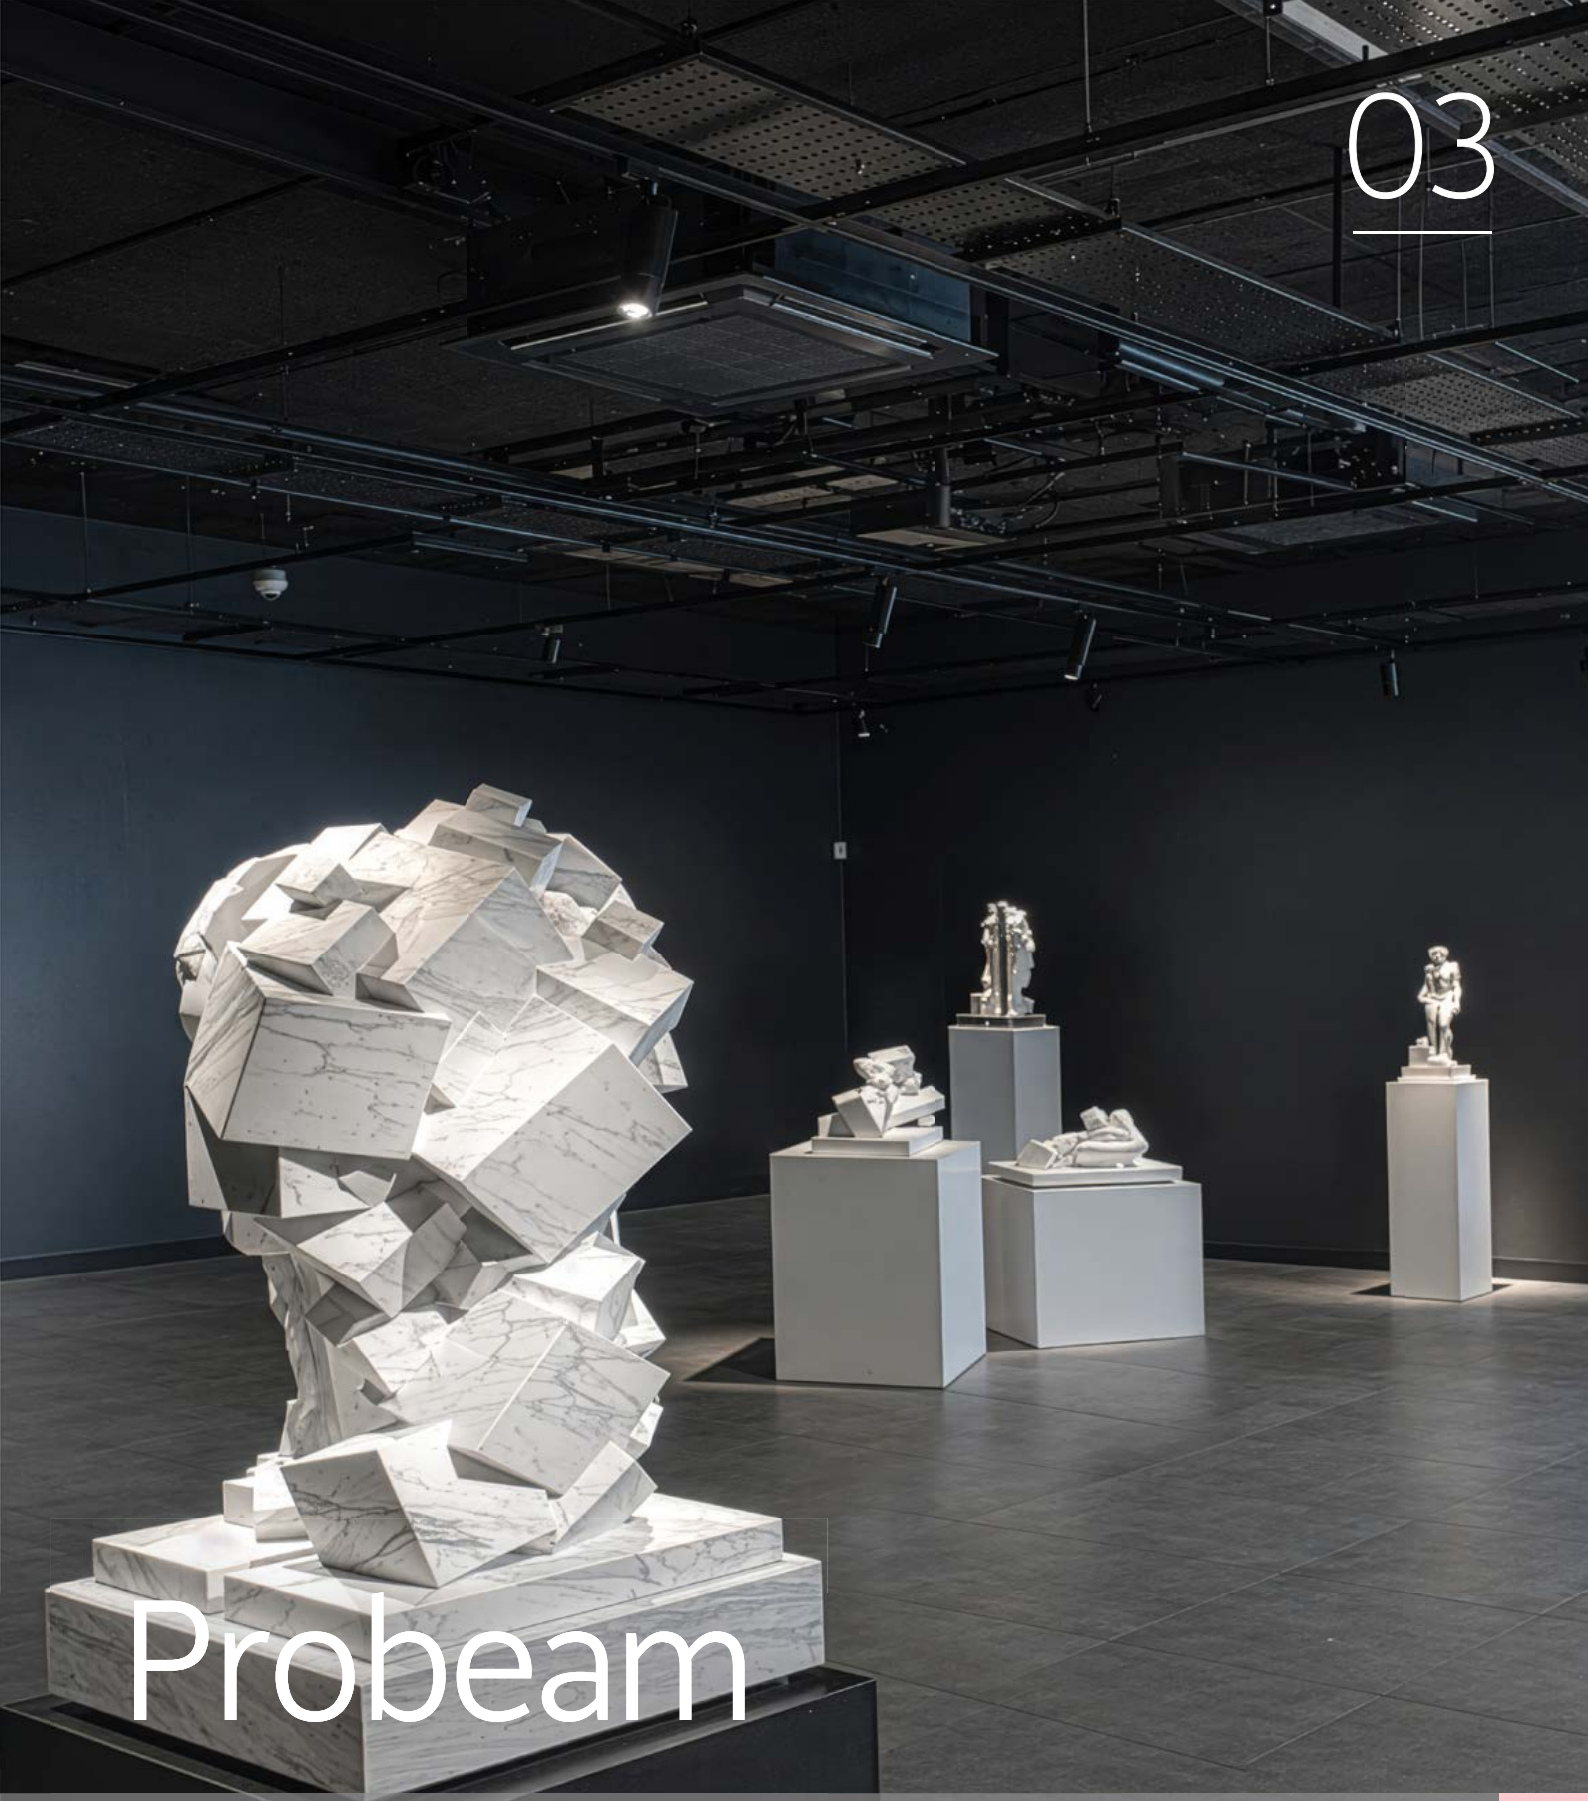

Mulryan Gallery / Nine Elms, London, UK

The Mulryan Gallery provides an elegant setting for contemporary art, allowing each piece to be appreciated individually. Probeam delivers highly controlled accent illumination, establishing visual hierarchy and enhancing the visitor experience throughout.

Twinlux

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/twinlux**

A distinctive twin-head spotlight featuring independently adjustable luminaires that appear to emerge seamlessly from the track body. Ideal for retail displays, exhibitions and feature lighting where multiple accents are required from a single fitting.



Twinlux comes in two colour options to suit any installation:



Black body



White body



Advanced lens technology



Can be **aimed** vertically



Discreet heat sink



Side profile

Options available:

Lumen output
2 x 500
2 x 900

Colour temp.
2700K
3000K
4000K

Body colour
White
Black

Track mount

Beam angles
6° 24° 38°

Body size
1 size

Vertical mount

Specification:

LED chip / CRI
CREE
CRI >80

Adjustable

IP rating
IP 20

Dimming options
DALI 2

Accessories
Honeycomb

03

Twinlux

Moor Park Golf Course / Hertfordshire, UK

Moor Park combines prestigious sporting facilities with elegant hospitality spaces housed within a historic estate. Twinlux provides dependable illumination throughout the venue, meeting safety requirements whilst remaining visually unobtrusive.

Ellipsa

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/ellipsa**

A compact spotlight specifically developed for lower ceiling applications. Its discreet proportions and clean aesthetic make it ideal for retail, hospitality and display environments requiring subtle integration.



Ellipsa is a compact track mounted spotlight, ideal for low ceilings:



Black body



Silver Grey body



Advanced lens technology



Can be **aimed** vertically



Passive heat sink



Side profile

Options available:

Lumen output
900

Colour temp.
2700K
3000K
4000K

Body colour
White
Black
Silver Grey

Track mount

Beam angles
24° 38°

Body size
1 size

Vertical mount

Specification:

LED chip / CRI
CREE
CRI >80

IP rating
IP 20

Dimming
ON/OFF

Accessories
Honeycomb

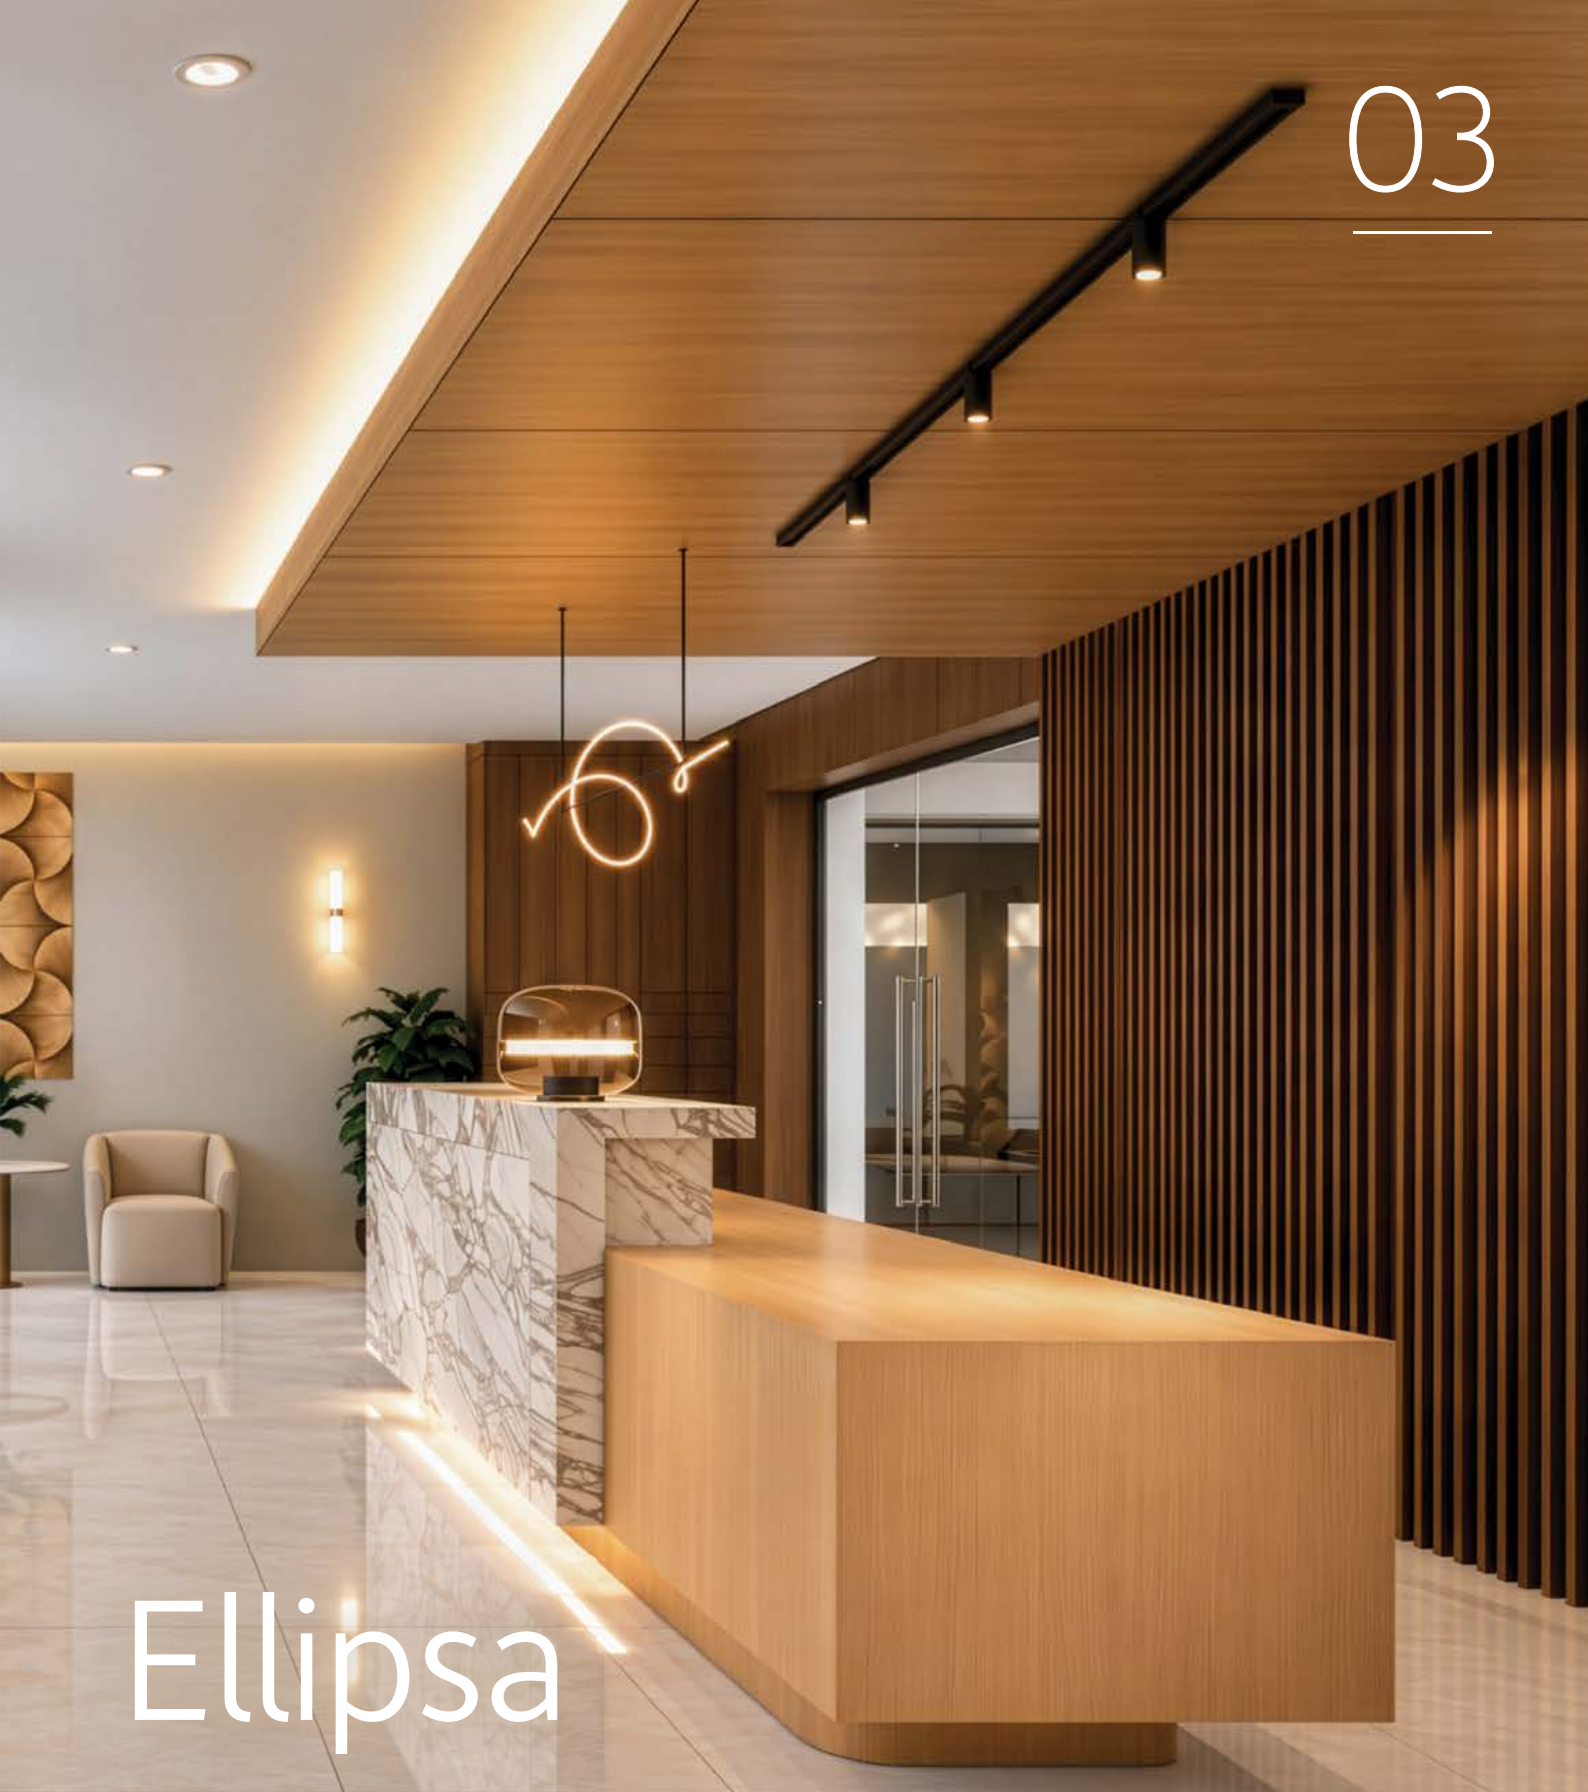

03

Ellipsa

Alder House Hotel / Bath, UK

The reception at Alder House Hotel creates a memorable first impression through considered interior design and premium finishes. Ellipsa introduces a striking decorative feature, reinforcing the character of the space whilst contributing to its inviting ambience.

Lumapar

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/lumapar**

This compact and stylish spotlight range is available in two lumen outputs and multiple beam angles, including a tight 6°. Ideal for retail, display and residential applications requiring precise accent lighting.



Lumapar is a small compact spotlight, ideal for low ceilings:



Black body



Silver Grey body



CREE LED chip



Can be **aimed** vertically



Rear heat sink as feature



With **honeycomb** accessory

Options available:

Lumen output
500 900

Colour temp.
2700K
3000K
4000K

Body colour
White
Black
Silver Grey

Track mount

Surface mount

Beam angles
6° 24° 38°

Body size
1 size

Vertical mount

Pendant stem

Specification:

LED chip / CRI
CREE
CRI >80

Adjustable

Dimming
Leading & trailing edge

IP rating
IP 20

Accessories
Honeycomb



03

Lumapar

Tortilla / Windsor, UK

Tortilla's vibrant restaurant concept combines bold materials, open kitchen theatre and energetic social dining. Lumapar provides effective accent lighting that strengthens visual interest and supports the lively character of the interior throughout the day.

Lumapar GU10

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/lumapar-gu10**

A timeless range of versatile spotlights designed for GU10 LED and retrofit lamps without the need for a transformer. Ideal for retail, display and residential applications requiring flexible illumination.

*Additional sizes available



*Additional sizes available

	Length	Dia.
Standard	76	63
Medium	89	63

Vertical tilt 90°
Horizontal rotation 355°

Lumapar GU10 is a small spotlight. Choose between two different cowl lengths:



Black standard cowl



Silver Grey medium cowl



Polished chrome body



GU10 lamp not supplied



Can be **aimed** vertically



Bullet shaped rear

Options available:

Body colour
- White
- Black
- Silver Grey
- Chrome

Retrofit lamps
- GU10
- PAR16

Body sizes
- 2 sizes

Track mount

Vertical mount

Surface mount

Pendant stem

Specification:

Adjustable

Anti-glare

IP rating
- IP20

Accessories
- Long cowl

Note: The long cowl is ONLY supplied as a stand-alone accessory.

03



Lumapar GU10

Bramwell Footwear / Nottingham, UK

Bramwell Footwear showcases premium footwear collections within a carefully curated retail setting. Lumapar GU10 highlights craftsmanship, texture and material quality with focused illumination that encourages customers to engage with featured displays.

Rocket E27

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/rocket-e27**

A classic compact spotlight range suitable for LED and PAR lamps. Ideal for retail, display and residential applications requiring a simple, reliable and adaptable accent lighting solution.



Rocket E27 is ideal for retrofit lamps. Choose between three different cowl styles:



Black with standard cowl



White with standard cowl



Extended cowl option



E27 lamp not supplied



Can be **aimed** vertically



Shallow convex cone rear

Options available:

Body colour
White
Black

Body sizes
3 sizes

Retrofit lamps
E27
R60
R63
R80
PAR20
PAR30

Track mount

Surface mount

Vertical mount

Pendant stem

Style options
Standard
Extended
Flared

Specification:

Adjustable

IP rating
IP 20



03

Rocket E27

Tian Tian / White City, London, UK

Tian Tian combines contemporary hospitality design with a relaxed social atmosphere inspired by modern Asian interiors. Rocket E27 introduces warmth and decorative character, helping create an inviting and memorable dining experience.

Topspot E27

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/topspot-e27**

A versatile spotlight for LED, PAR and mains reflector lamps. Ideal for retail, display and residential applications requiring both feature lighting and effective general illumination.



Topspot E27 is ideal for LED retrofit lamps of different types:



Rubber gasket for use with PAR20 lamps



E27 lamp not supplied



Can be **aimed** vertically



Vented back

Options available:

Body colour
White

Body size
1 size

Retrofit lamps
E27
R60
R63
R80
PAR20
PAR30
PAR38

Track mount

Surface mount

Vertical mount

Pendant stem

Specification:

Adjustable

IP rating
IP20



03

Topspot E27

Harbour Lane Interiors / Cornwall, UK

Harbour Lane Interiors presents a carefully curated collection of furniture, accessories and homeware within a relaxed retail environment. Topspot E27 provides flexible accent illumination that highlights key displays, enhances product presentation and supports the welcoming character of the space.

illuma

Linear

Illuma's **Linia Blade S continuous linear lighting** provided an ideal solution for **The Gallery** at **Christ Church** in Woking, delivering the practical lighting needed for meetings, conferences, training sessions and exhibitions.

Industry case study /

Christ Church

The Gallery / Woking, UK

The Gallery at Christ Church, Woking is a striking multi-purpose space set beneath an impressive timber-vaulted ceiling and surrounded by original brickwork and stained-glass windows / As the venue's largest meeting room, it is used for everything from conferences and training sessions to exhibitions and large board meetings, meaning the lighting needed to perform across a wide variety of layouts and uses.

Illuma's **Linia Blade S continuous linear lighting** provided an ideal solution for the space, combining clean architectural lines with the level of general illumination required across the large 13 × 9 metre room.

Rather than being conventionally suspended, the **Linia Blade S** luminaires were mounted to the existing timber beams using bespoke brackets developed specifically for the project. This allowed the lighting to follow the structure of the building closely, creating a neat and considered installation while respecting the character of the historic interior.

The **continuous linear layout** distributes light evenly throughout the Gallery, helping to provide consistent illumination regardless of how the room is arranged. It's slim profile also works naturally alongside the exposed timber structure, introducing a contemporary element without competing with the brickwork, beams or stained-glass. The linear runs help emphasise the scale and height of the room, drawing the eye through the space.

The result is a carefully integrated lighting scheme that combines functionality with architectural sensitivity, demonstrating how **Linia Blade S** can be adapted to suit challenging spaces while enhancing both the usability and visual character of the interior.

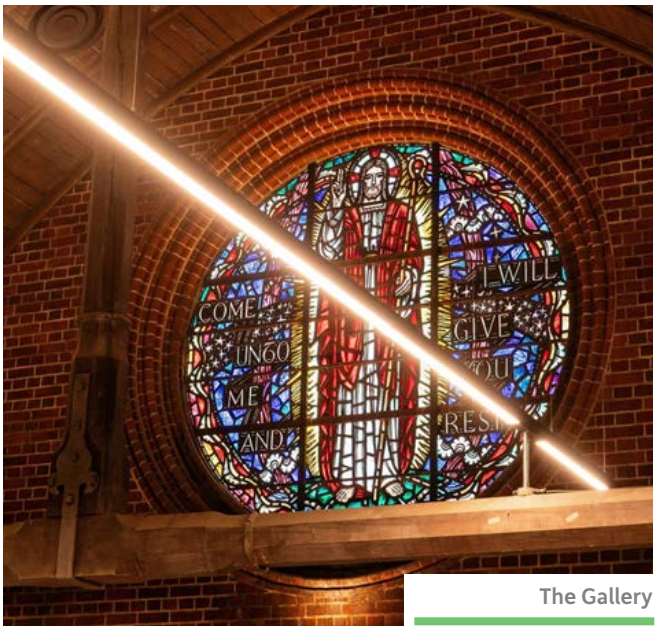

The Gallery



Conference facilities

Linear product range

04

A versatile range of linear lighting solutions that can dramatically transform the aesthetics and possibilities of how a space is illuminated.



Linia Blade S 60



Linia Blade T 64



Linia Blade R 66



Fluoresa 68



Cubix 70



Grazr 72



Floodline 74



Quadroled Linear 76



Quadroled 78

Introducing

Linia Blade S

Multiple styles. A sleek, suspended, surface or track mounted linear range that is available in a variety of options, including Continuous Row for our Suspended and Surface Mounted versions.





illuma / products / **Linia Blade S**

Indirect diffuser



Wallwash optic

Accessories

For **Suspended** and **Surface** versions:



Straight Connector



90° Connector



Pendant kit



End caps



T Connector



X Connector



Wire suspension



Blanking module

Bi-directional

Suspended /
- Direct
- Microprismatic
- Wallwash
- Opal Flood

Output 70% down / 30% up ratio

The uplight (indirect) component *provides a reflected, low glare distribution, whilst the downward component, available as either a Direct, Microprismatic, Wallwash or Opal Flood optic, provides a general or direct level of illumination for the space below.*

Indirect diffuser
110° upward

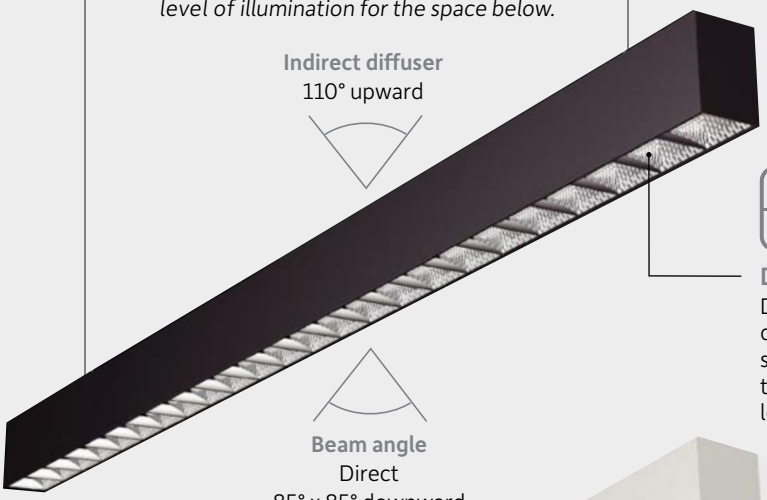

Beam angle
Direct
85° x 85° downward

Direct

- Suspended
- Surface mounted
- Track mounted

Direct
Designed to emit light directly downwards onto a surface, such as a desk or work area, where task lighting combined with a low glare output is required.

Microprismatic

- Suspended
- Surface mounted
- Track mounted



Beam angle
Microprismatic
85° downward

Microprismatic
The lens has been designed to reduce the glare from the fitting, making this optic perfect for illuminating offices, classrooms and areas which require a lower Unified Glare Rating (UGR).

Wallwash

- Suspended
- Surface mounted
- Track mounted

When **track mounted,** the asymmetric outputs of the Wallwash versions are fixed to a **right** or **left** orientation.



Beam angle
Wallwash 55° x 90°
Left / Right

Wallwash
Wall washing illuminates a vertical surface with uniform brightness. Wall washing can draw attention to the wall and can make a room appear bright, providing a soft, diffused light into the space.

Opal Flood

- Suspended
- Surface mounted
- Track mounted



Beam angle
Opal Flood 110°

Opal Flood
Utilising an Opal Flood will provide a soft, seamless diffused low glare effect into the space.

Linia Blade S *continued*

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/linia-blade-s**

A sleek and versatile linear range available in suspended, track or surface mounted formats. Ideal for applications requiring general lighting or wall washing. Suspended and surface variants can connect as continuous runs.

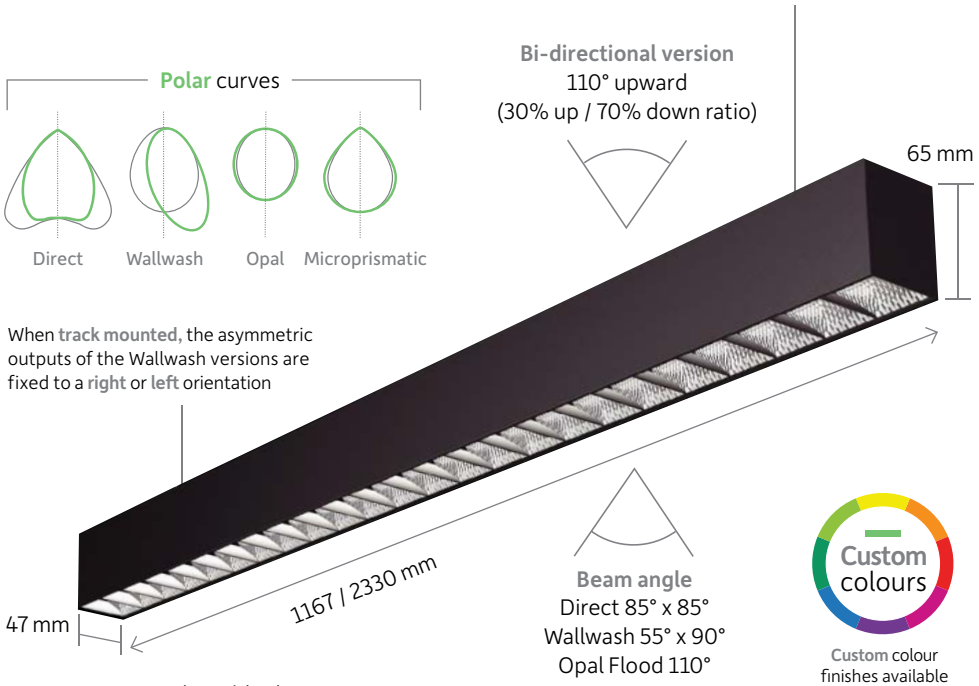

Note: Features selectable drivers

Linia Blade S
comes in two lengths, each with two output options:



White Microprismatic option



Black Wallwash option



Glare reducing lenses



Joining connectors



Slim end profile (65mm x 47mm)



Black Opal Flood option

Options available:

Lumen output
3000 5000 10000

Colour temp.
3000K
4000K

Body colour
White
Black

Suspended

Surface mount

Style options
Direct
Microprismatic
Wallwash
Opal flood

Beam angles
Direct: 85° x 85°
Wallwash: 55° x 90°
Opal Flood: 110°
Microprismatic: 85°

Body sizes
1167mm 2330mm

Track mount

Emergency

Specification:

LED chip / CRI
Samsung
CRI >80

Accessories

Dimming options
DALI 2
Casambi

04

Linia Blade S

Brocket Hall Performance Centre / Hatfield, UK

Set within the prestigious Brocket Hall Estate, the performance centre combines advanced fitness facilities with sophisticated interior design. Linia Blade S creates crisp architectural lines of light that reinforce the building's contemporary aesthetic.

Linia Blade T

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/linia-blade-t**

A slimline track-mounted linear range offering a choice of optics and lumen outputs. Ideal for retail, gallery and commercial environments requiring wall washing and general illumination.

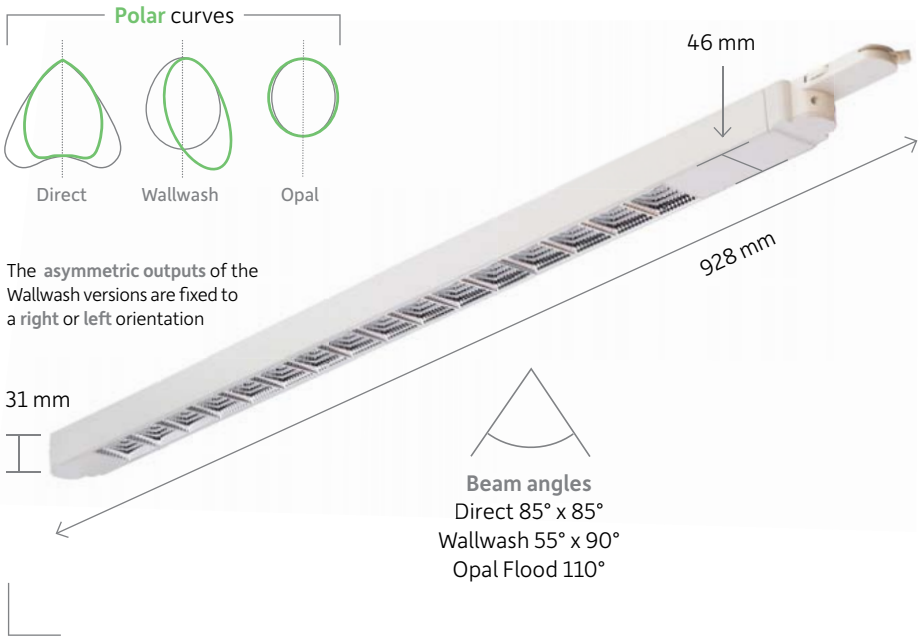

Linia Blade T comes in two colours and three options:



Black Direct option



White Wallwash option



White Opal Flood option



Direct profile



3-Circuit track adaptor



Wallwash profile

Options available:

Lumen output
3000
5500

Colour temp.
3000K
4000K

Body colour
White
Black

Track mount

Style options
Direct
Wallwash
Opal flood

Beam angles
Direct: 85º x 85º
Wallwash: 55º x 90º
Opal Flood: 110º

Body size
928mm

Specification:

LED chip / CRI
Samsung
CRI >80

Wide beam

IP rating
IP 20

04

Linia Blade T

Lakeside Garden Centre / Warminster, UK

Lakeside Garden Centre welcomes visitors across retail, restaurant and seasonal display areas throughout the year. Linia Blade T provides a sleek linear lighting solution with excellent visual comfort and consistent illumination, helping to create an inviting environment whilst seamlessly integrating into the exposed ceiling design.

Linia Blade R

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/linia-blade-r**

A recessed linear luminaire range available in multiple configurations, beam angles and lumen outputs. Designed to integrate seamlessly into architectural interiors while delivering precise and effective illumination.

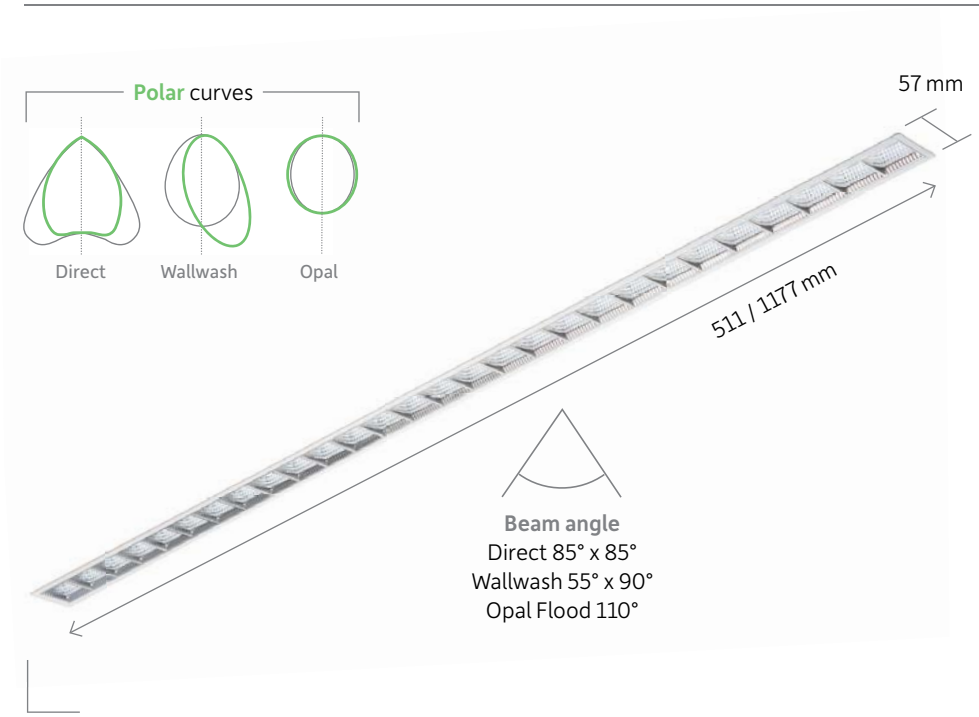

Linia Blade R
comes in two lengths, each with three styles:



Wallwash option



Opal Flood option



Direct profile



Wallwash profile



Opal Flood profile



Strong fixing clips

Options available:

Lumen output
2300
3000

Colour temp.
3000K
4000K

Body colour
White

Emergency

Style options
Direct
Wallwash
Opal flood

Beam angles
Direct: 85° x 85°
Wallwash: 55° x 90°
Opal Flood: 110°

Body sizes
511mm
1177mm

Specification:

LED chip / CRI
Samsung
CRI >80

Wide beam

Cut-out
504x45 / 1170x45 mm

Dimming options
DALI 2
Casambi
Leading & trailing edge

04

Linia Blade R



Ashford House / Bristol, UK

Ashford House combines collaborative workspaces and breakout areas within a contemporary office setting designed around wellbeing and productivity. Linia Blade R introduces clean architectural lighting that complements the interior whilst ensuring visual comfort.

Fluoresa

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/fluoresa**

A contemporary suspended luminaire delivering efficient direct and indirect illumination with excellent visual comfort. Ideal for offices, educational facilities and commercial spaces requiring balanced ambient lighting.

Custom colours

Custom colour finishes available on request

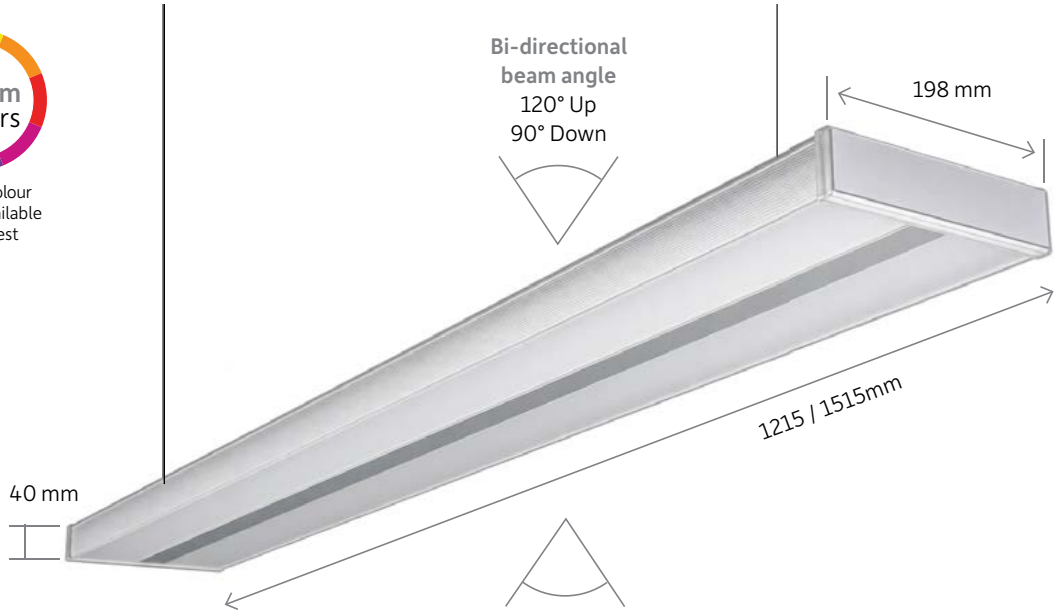

Note:
1.5 metre suspension wires are included with this fitting



Clean aluminium profile



Low linear profile



Vertical uplighting

Options available:

Lumen output
5000
6400

Beam angle
Up: 120°
Down: 90°

Body colour
Aluminium

Suspended

Colour temp.
Selectable
3000-4000-5000K

Body sizes
1215mm
1515mm

Specification:

LED chip / CRI
Illuma
CRI >80

Adjustable

Bi-directional

Dimming options
DALI 2
ON/OFF

IP rating
IP40

Anti-glare
UGR <19

Emergency

04

Fluoresa

Brookfield Learning Centre / Nottingham, UK

Designed to support study, research and collaboration, the interior combines open learning spaces with inviting breakout areas to create a welcoming educational environment. Fluoresa delivers comfortable, uniform illumination throughout the facility, enhancing visual comfort while providing an ideal setting for reading, learning and informal interaction.

Cubix

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/cubix**

A striking multi-cell luminaire combining high performance with precise optical control. Ideal for retail, leisure and commercial applications requiring impactful accent lighting and strong visual presence.

Custom colours

Custom colour finishes available on request



Black / Gold reflector option

Cubix is available in two body colours & four reflector colours:



Black / Silver reflector option



White / Silver reflector option



Unique multi-lens design with curved profile



Track mountable low linear profile



Black / White reflector option

Options available:

Lumen output

Selectable

2000 2500 3000 3500 4000 4800

Body colour

White

Black

Reflector colour

White

Black

Silver

Gold

Track mount

Surface mount

Beam angle

70°

Colour temp.

2700K

3000K

4000K

Body size

1 size

Vertical mount

Specification:

LED chip / CRI

Bridgelux CRI >90

IP rating

IP40

Dimming options

DALI 2

Casambi

Leading & trailing edge

04

Cubix

Vertex Workspace / Birmingham, UK

Vertex Workspace has been designed around flexibility, collaboration and employee wellbeing within a contemporary office setting. Cubix creates a distinctive geometric lighting aesthetic, delivering balanced illumination that supports productivity and complements the architectural design.

Grazr

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/grazr**

A discreet linear wall washer engineered to provide smooth and uniform illumination of vertical surfaces. Ideal for galleries, retail displays and architectural applications where an asymmetric optic is required.

Black option



Grazr is a discreet wallwasher, available in two colour options:



White option



Diffuser technology



Can be **aimed** vertically

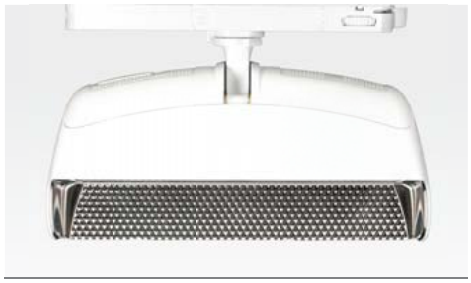

Unique design with metal shroud



Low linear profile

Options available:

Lumen output
Selectable
2500 2900 3300

Body colour
White
Black

Track mount

Colour temp.
Selectable
3000-3500-4000K

Beam angle
26 x 38°

Body size
1 size

Specification:

LED chip / CRI
Illuma
CRI >90

Adjustable

IP rating
IP 20

Dimming options
DALI 2
Casambi
Leading & trailing edge

04

Grazr

The Gallery Collection / Edinburgh, UK

Exceptional artwork deserves exceptional presentation. Grazr delivers seamless wall illumination that brings paintings, photography and mixed-media installations to life, creating an inviting gallery environment where every exhibit can be viewed with clarity, balance and impact.

Floodline

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/floodline**

This compact wall washer has been specifically developed with a high lumen output and rectangular spread. Ideal for providing uniform illumination of vertical surfaces, displays and architectural features.

Custom colours

Custom colour finishes available on request





Quality stainless steel louvre for reduced glare & beam control



Curved profile



Stainless steel louvre

Options available:

Lumen output
2200 3300 4000 4400 8000

Colour temp.
3000K
4000K

Body colour
White
Black

Track mount

Surface mount

Beam angle
89°

Body sizes
686mm 984mm 1286mm

Vertical mount

Specification:

LED chip / CRI
Seoul-Semi
CRI >80

Wide beam

Anti-glare

Dimming options
DALI
DALI
ON/OFF

IP rating
IP 20

Adjustable

04

Floodline

St. Mark's Church / Grenoside, Sheffield, UK

The lighting scheme at St. Mark's Church balances respect for the building's heritage with the requirements of modern community use. Floodline highlights architectural features and focal points, enhancing both visibility and atmosphere.

Quadroled Linear

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/quadroled-linear**

A contemporary linear luminaire designed for illuminating large spaces requiring efficient high-output lighting. An advanced optical lens system delivers a wide, uniform and controlled distribution of light.

Selectable (600mm) lumen output:

2210 — 2600 — 3120 — 3500

Selectable (1500mm) lumen output:

5740 — 6860 — 8120 — 9300

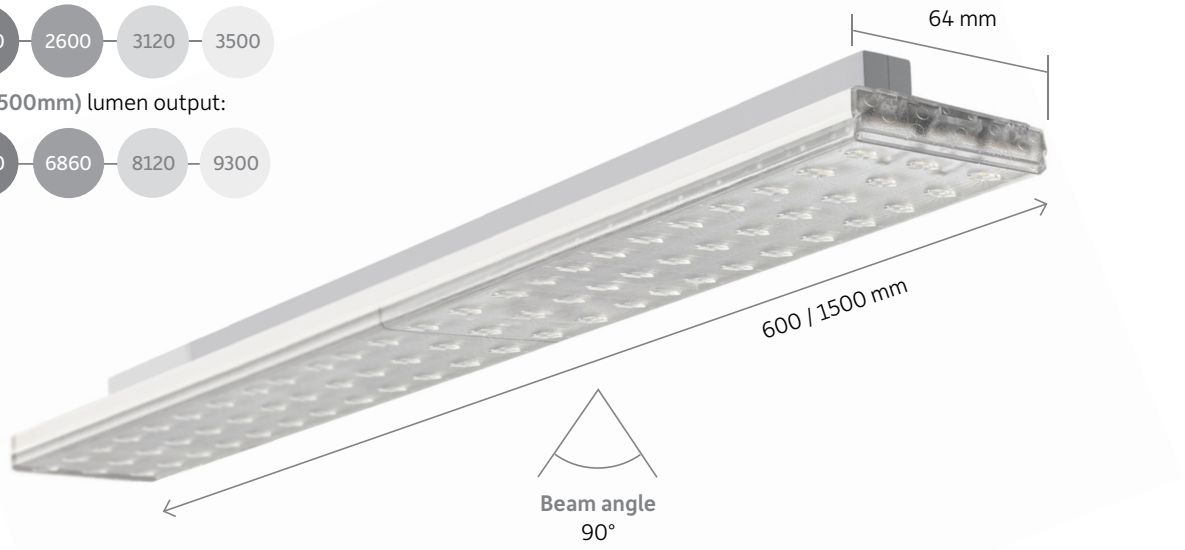



Optical lens system



Mounts into 3-Circuit track



Black option



Four selectable lumen outputs

Options available:

Lumen output (600mm)

Selectable
2210 2600 3120 3500

Colour temp.

3000K
4000K

Body colour

White
Black

Track mount

Lumen output (1500mm)

Selectable
5740 6860 8120 9300

Beam angle

90°

Body sizes

600mm 1500mm

Specification:

LED chip / CRI

Edison
CRI >80

Wide beam

Dimming options

DALI 2
ON/OFF

IP rating

IP20

Selectable output

04



Quadroled Linear

UltraFlex Gym / Derby, UK

UltraFlex Gym combines premium training equipment with a bold interior designed to inspire performance. Quadroled Linear delivers uniform high-output illumination across workout zones, supporting functionality whilst reinforcing the energetic character of the space.

Quadroled

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/quadroled**

A high-output luminaire designed for illuminating large spaces requiring powerful and efficient lighting. Advanced optics provide precise beam control and a wide, uniform distribution of light.

Selectable lumen output:

8000 — 9120 — 10240 — 11500

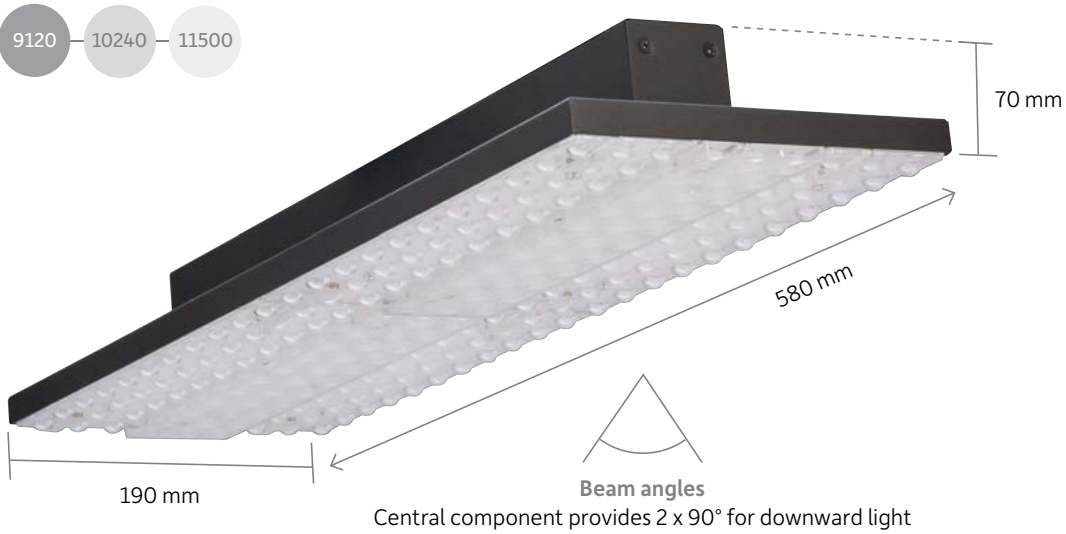

Beam angles
Central component provides 2 x 90° for downward light
Outer component provides 4 x 25° for lighting the verticals



Low linear profile



Optical lens system



Four selectable lumen outputs

Options available:

Lumen output
Selectable
8000 9120 10240 11500

Colour temp.
3000K
4000K

Body colour
Black

Beam angles
2 x 90° + 4 x 25°

Body size
580mm

Track mount

Specification:

LED chip / CRI
Edison
CRI >80

Wide beam

IP rating
IP20

Selectable output

04

Quadroled



Harvester Hall / York, UK

Harvester Hall brings together artisan food vendors, independent retailers and community events within a vibrant destination venue. Quadroled provides powerful general illumination that supports circulation, visibility and the industrial-inspired aesthetic.

illuma

Track systems

Illuma's **3-Circuit Track** system provided the ideal foundation for the **Mulryan Gallery** lighting, using a combination of **Illuma**'s **Probeam Select**, **Lumapar** and **Concepta** spotlights throughout the gallery.

Industry case study /

Mulryan Gallery

Nine Elms / London, UK

Mulryan Gallery provides a contemporary setting for the work of artist Vincenzo Muratore / Creating a calm and considered environment, each piece in the gallery can be viewed and appreciated individually. With the artwork at the heart of the space, the lighting needed to be precise, adaptable and capable of responding to works of different sizes and formats.

Illuma's **3-Circuit Track system** provided the ideal foundation for the gallery lighting, offering the flexibility required within an exhibition environment. The carefully planned track layout allows luminaires to be repositioned and redirected as displays change, and the freedom to adapt its lighting without altering the wider installation.

A combination of **Illuma** **Probeam Select** and **Lumapar spotlights** have been used throughout the gallery. **Probeam Select**'s variable beam allows the spread of light to be adjusted to suit individual artworks, making it ideal for control and flexibility. **Lumapar** spotlights provide a more defined, fixed beam, offering a consistent solution where the lighting requirement remains more uniform.

Within the artist's studio, **Illuma** **Concepta** spotlights provide high colour rendering, helping colours, tones and fine details appear as naturally and accurately as possible. This makes the lighting particularly well suited for faithful colour representation and assessing artwork. Together, the **3-Circuit Track** system and carefully selected spotlight ranges create a flexible, precise and visually considered lighting scheme that supports both the display and creation of Muratore's work.

The result is a refined lighting solution that keeps the artwork firmly at the centre of the experience while demonstrating the versatility of **Illuma** track and spotlighting across both gallery and studio environments.



Mulryan Gallery

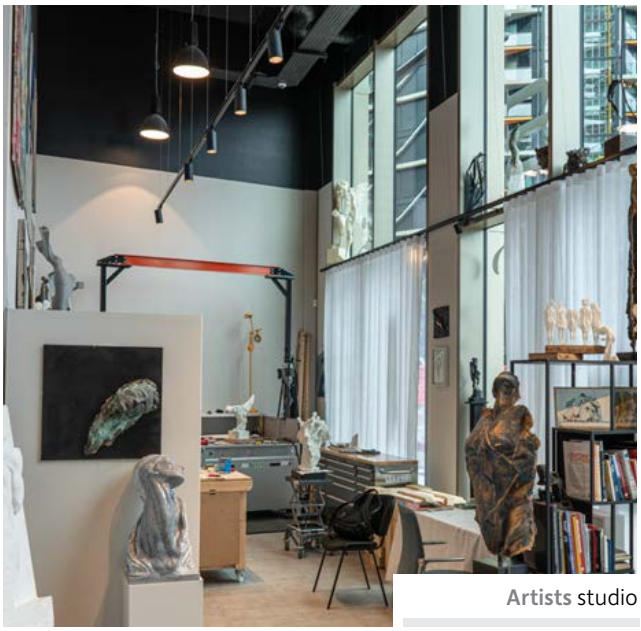

Artists studio

Track systems product range

05

A comprehensive range of mains track systems that provide an easy to install, future proof and flexible solution to any interior environment.



CLEVR 230V 84



1-Circuit Track 230V 86



3-Circuit Track 230V 88



3-Circuit
Track 230V Recessed 88



Control Track 230V 90



Control Track
Track 230V Recessed 90



Track Polarity 92

Introducing

Track

Multiple styles /
A comprehensive range of mains track systems providing versatility for all applications /



Flexible
Track is easy to cut and join.

Future proof
Luminaires can be added or removed easily.

Quick to install
With just one **power feed** and a variety of connectors available, track can be quickly installed.

illuma /
products /
track systems

Installation options:

Surface



1-Circuit



3-Circuit



Control Track

Suspended



1-Circuit



3-Circuit



Control Track

Recessed



3-Circuit Recessed



Control Track Recessed

Why surface?

Provides a simple and versatile lighting solution for interior spaces /

Ideal for retail, commercial and hospitality environments. Installed directly onto ceilings or walls, surface track offers a clean appearance without the need for ceiling alterations. Available in 1-Circuit, 3-Circuit and Control Track versions, it provides a flexible and cost-effective solution, allowing luminaires to be repositioned as lighting requirements change. Suitable for both new-build and refurbishment projects.

Why suspended?

Suspended tracks are used to provide a versatile and flexible lighting solution /

Suspension wires are installed onto the ceiling and the track is hung to the desired level within the space. Suspending track is a great option for spaces with high ceilings, as they allow for lighting to be brought closer to the task area, creating a more intimate and comfortable atmosphere. Our 1-Circuit, 3-Circuit and Control Tracks can be suspended.

Why recessed?

Provides a sleek and modern lighting solution for interior spaces /

Ideal for galleries, museums or any modern interior. Installed into a ceiling or wall, they provide a clean and streamlined look. Available in 3-Circuit and Control Track versions, recessed tracks are a popular choice for those looking for a modern and functional lighting solution that is both versatile and efficient. Please be aware that recessed track needs to be hung from a solid surface with the suspended ceiling built around it.



What is Casambi?

Casambi combines advanced Bluetooth® Low Energy technology with exceptional ease of use to create a smart, wireless lighting control solution /

Controlled with CASAMBI

The Casambi App

Luminaires can be individually addressed, grouped and programmed through the Casambi App, allowing users to create scenes, schedules and intelligent lighting behaviours tailored to their environment.

With no additional control wiring required, installation is simplified and future changes can be made quickly and easily. Scalable from a single space to an entire building, Casambi provides a flexible, energy-efficient and future-ready lighting control platform.

What is DALI?

Control Track has a pair of control wires within the track which facilitates the communication of a digital signal to individual DALI (Digital Addressable Lighting Interface) compatible luminaires /

DALI 2

It can be useful in a variety of settings, from retail stores to art galleries through the creation of different lighting scenes and the ability to adjust lighting levels in response to changes in ambient lighting conditions.

Control Track is designed to be flexible and scalable, so it can be used in a wide range of settings, from small installations to large-scale projects. It also supports the integration of other lighting control systems such as emergency lighting to provide a comprehensive solution.

CLEVR

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/clevr**

A Casambi-enabled Bluetooth live-end designed to provide simple wireless dimming control of compatible track luminaires. Eliminates the need for additional control wiring while enabling intuitive operation.

Controlled with CASAMBI

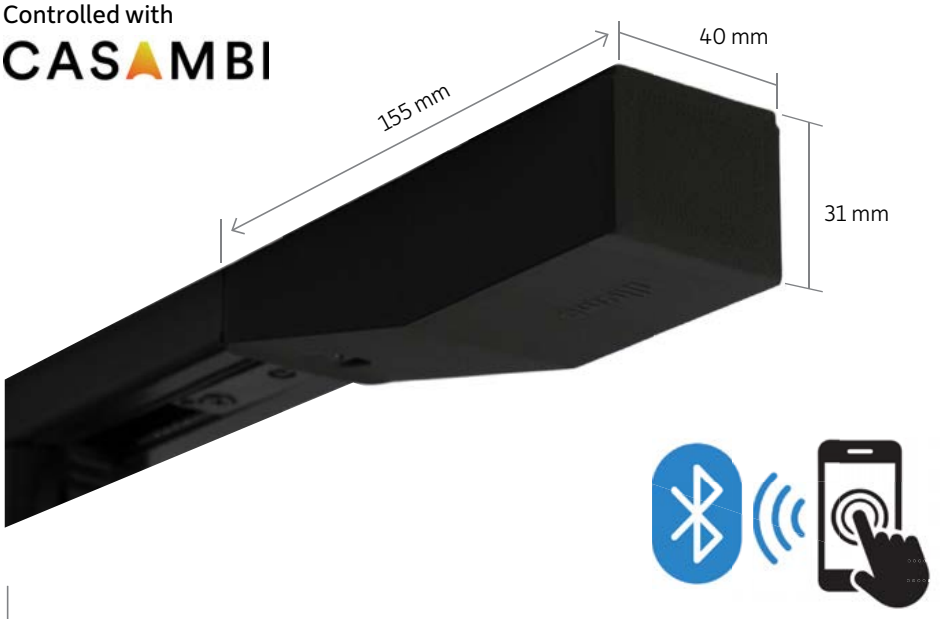

CLEVR comes in a white or black finish:



White finish



Black finish



Sleek 3D printed design



Compatible with 1-Circuit Track 230V

Options available:

Body colour: White / Black

Suspended

Surface mount

Vertical mount

Specification:

Max Wattage: Watts 100

Live end: Live end

IP rating: IP 20

Dimming options: Casambi

Casambi-Live-End-Versatile-Radio (CLEVR)



Control up to 100 Watts

Example:
11.2W Lumapar Spotlights
(100W/11.2W) = 8 per CLEVR

Benefits include:

- Control track lighting via phone or tablet
- Cost effective 'Plug & Play' solution
- Enjoy benefits of ON / OFF / DIM / SAVE SCENE



Controlled with CASAMBI

Attaching **CLEVR** to track (1-Circuit)

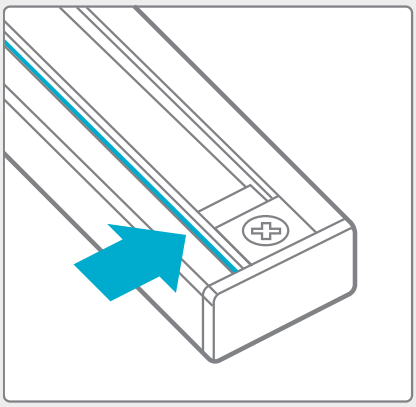

A **groove** runs along the edge of the track to show the LIVE.

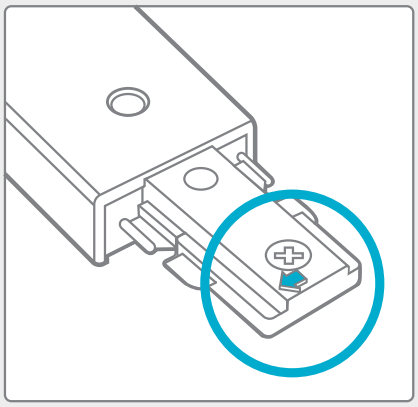

Every adaptor and accessory has an **arrow** moulded on it.

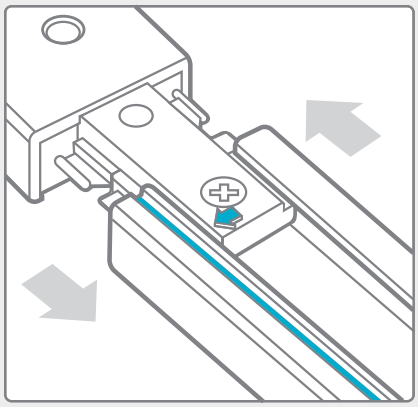

The **arrow** must point at the **groove** when joining track

NB: CLEVR is for use with Illuma's 1-Circuit 230V track only.

1-Circuit Track 230V

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/1-circuit-track-230v**

A 16A mains voltage track system with a comprehensive range of connectors and accessories. Ideal for applications where luminaires may need to be frequently repositioned or reconfigured.

Custom colours

Custom colour finishes available on request

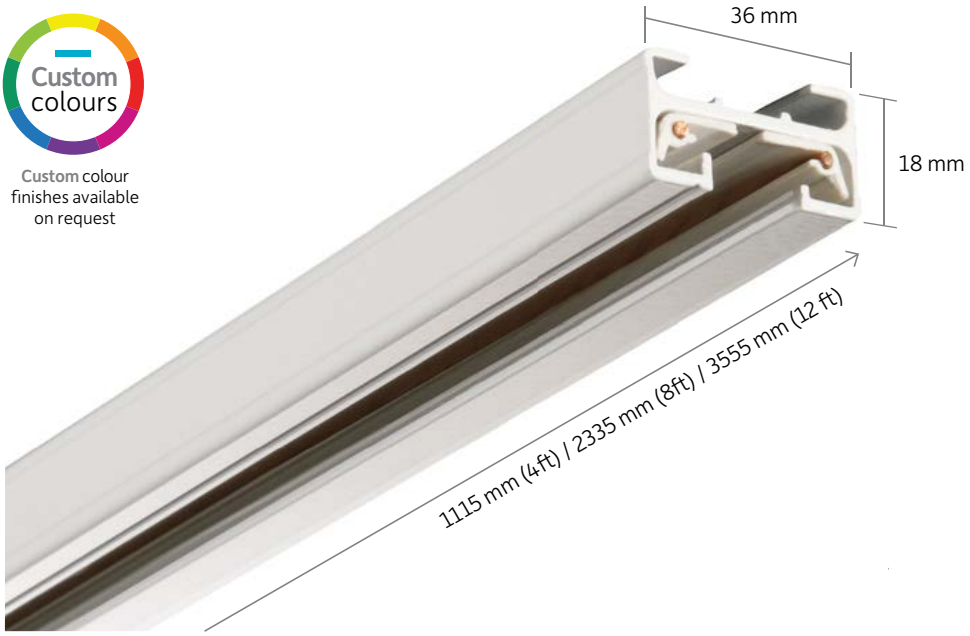

1-Circuit Track 230V comes in a variety of colours and lengths:



Black finish



Silver Grey finish

1-Circuit Track:

1-Circuit Track system powers all luminaires attached to the track on one circuit only. The power to the track can be controlled by a switch or a dimming module.

Options / Specification:

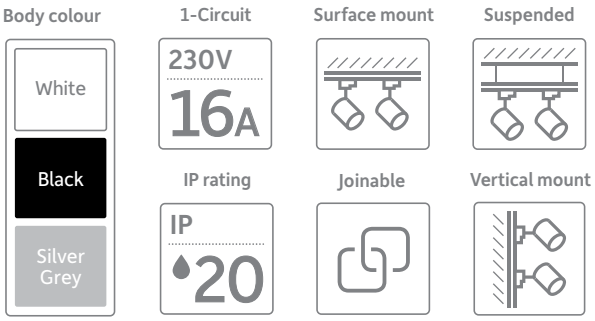

Track polarity for 1-Circuit



A **groove** runs along the edge of the track to show the LIVE.



Every adaptor and accessory has an **arrow** moulded on it.



The **arrow** must point at the **groove** when joining track



Track Adaptor must also point to the LIVE groove.

1-Circuit Track 230V

Track

Description	1-Circuit Track, 230V 4ft / 1115mm, inc. Dead End	1-Circuit Track, 230V 8ft / 2335mm, inc. Dead End	1-Circuit Track, 230V 12ft / 3555mm, inc. Dead End
Part code	**T4**	**T8**	**T12**
Body colour	**-WH** ☐ **-BL** ■ **-SG** ■	**-WH** ☐ **-BL** ■ **-SG** ■	**-WH** ☐

Live Ends, Dead Ends & Connectors (as viewed from below)





Description	Live End, 82mm Suitable for incoming mains	Centre Feed, 118 x 118mm, not suitable for suspended track, cannot be used as a connector	Dead End with fixing screw, 3mm
Part code	**T38**	**T39**	**TDE1**
Body colour	**-WH** ☐ **-BL** ■ **-SG** ■	**-WH** ☐ **-BL** ■	**-WH** ☐ **-BL** ■ **-SG** ■





Description	Straight Connector, 8mm	Flexible Connector 0° to 158°, 160mm	Adjustable Connector 90°, 70 x 70mm, (Adjustable left & right) or 180°, 105mm, suitable for incoming mains
Part code	**T23**	**T20**	**T24**
Body colour	**-WH** ☐ **-BL** ■ **-SG** ■	**-WH** ☐ **-BL** ■	**-WH** ☐ **-BL** ■





Description	'T' Connector, 70 x 105mm, Dual Polarity Suitable for incoming mains	'X' Connector, 105 x 105mm. Suitable for incoming mains, requires two live ends	T Bar attachment clip for use with tiles that lie flush with a 25mm T bar
Part code	**T25**	**T26**	**T37F**
Body colour	**-WH** ☐ **-BL** ■	**-WH** ☐ **-BL** ■	

Track Adaptors & Suspensions

Description	Switched Track Adaptor - pre wired with 1500mm cable, 1kg max load
Part code	**T29**
Body colour	**-WH** ☐ **-BL** ■
Track Adaptor	**/S** (1-Circuit) / **/G1** (Multi)



Description	Switched Track Adaptor with ring - pre wired with 1500mm cable, 5kg max load
Part code	**T32**
Body colour	**-WH** ☐ **-BL** ■
Track Adaptor	**/S** (1-Circuit) / **/G1** (Multi)



Description	Adjustable Suspension Wire, with bracket & fixings
Part code	**T35**
Length	**(3000)** 3000mm **(6000)** 6000mm



Description	Suspension Rod
Part code	**T33**
Body colour	**-WH** ☐ **-BL** ■ **-SG** ■
Length	**(500)** 500mm **(1000)** 1000mm



T4 requires 2 suspension rods or suspension wires / **T8** requires 3 suspension rods or suspension wires / **T12** requires 4 suspension rods or suspension wires. Max loading 10kg per rod.

3-Circuit Track 230V

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/3-circuit-track-230v**

A 16A mains voltage track system enabling up to three independently switched lighting circuits on a single track. Providing flexibility for changing displays and lighting schemes.

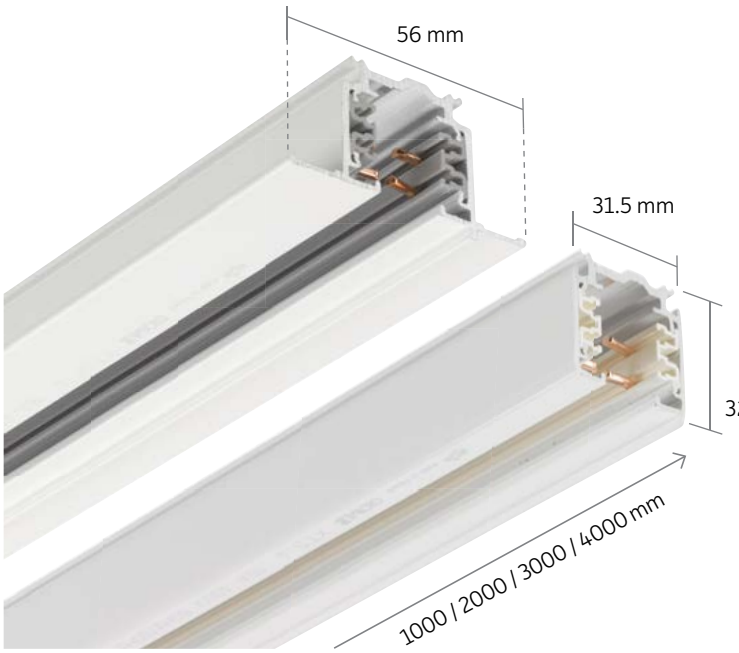

3-Circuit Track enables emergency lighting to be integrated into one of its three circuits, reducing installation costs and eliminating separate wiring. **L3** is typically used as the permanent live supply for emergency lighting.

Custom colours

Custom colour finishes available on request

3-Circuit Track 230V comes in a variety of colours and lengths:



Black finish



Silver Grey finish (recessed)

3-Circuit Track:

3-Circuit Track system is a type of lighting track that has three separate circuits, each of which can be independently controlled to provide power and control to different groups of luminaires. The power to each circuit can be controlled by a switch or a dimming module.

Recessed Track:

Recessed Track system has the same benefits as the 3-Circuit Track but is recesssed into the ceiling which provides a clean, unobtrusive look. Ideal when a minimalistic architectural aesthetic is required.

Options / Specification:

Body colour

White

Black

Silver Grey

3-Circuit

230V 16A

Surface mount

Suspended

IP rating

IP 20

Joinable

Recessed

How the 3-Circuit system works

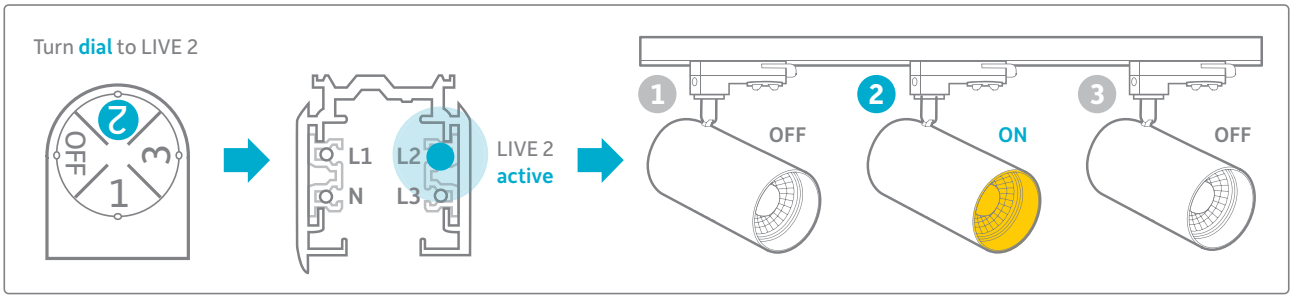

3-Circuit Track 230V

Track

Description	3-Circuit Track, 230V 3.2ft / 1000mm	3-Circuit Track, 230V 6.5ft / 2000mm	3-Circuit Track, 230V 9.8ft / 3000mm	3-Circuit Track, 230V 13.1ft / 4000mm
Part code	**TS4100**	**TS4200**	**TS4300**	**TS4400**
Recessed part code	**TSF4100**	**TSF4200**	**TSF4300**	
Body colour	**-WH ☐ -BL ■ -SG ■**	**-WH ☐ -BL ■ -SG ■**	**-WH ☐ -BL ■ -SG ■**	**-WH ☐ -BL ■**

Live Ends, Dead Ends & Connectors (as viewed from below)








Description	Live End, 66mm Suitable for incoming mains	Live End, 66mm Suitable for incoming mains	Dead End, 3mm	Centre Feed, 100mm Suitable for incoming mains	Straight Connector No extra length after insertion	'L' Connector, 66 x 66mm. Suitable for incoming mains
Part code	**TS11**	**TS12**	**TS41**	**TS14**	**TS21**	**TS34**
Body colour	**-WH ☐ -BL ■**	**-WH ☐ -BL ■**	**-WH ☐ -BL ■**	**-WH ☐ -BL ■**	**-WH ☐ -BL ■**	**-WH ☐ -BL ■**







Description	'L' Connector, 66 x 66mm Suitable for incoming mains	'X' Connector, 100 x 100mm Suitable for incoming mains	'T' Connector, 66 x 100mm Suitable for incoming mains	'T' Connector, 66 x 100mm Suitable for incoming mains	'T' Connector, 66 x 100mm Suitable for incoming mains
Part code	**TS35**	**TS38**	**TS36**	**TS37**	**TS39**
Body colour	**-WH ☐ -BL ■**	**-WH ☐ -BL ■**	**-WH ☐ -BL ■**	**-WH ☐ -BL ■**	**-WH ☐ -BL ■**







Description	'T' Connector, 66 x 100mm Suitable for incoming mains	Flexible Connector, 0° to 180°, 175mm	Adjustable Connector, 60° to 300°, 160mm	Recessed Cover Plates for Recessed Track only	
Part code	**TS40**	**TS23**	**TS24**	**TSF10**	**TSF30**
Body colour	**-WH ☐ -BL ■**	**-WH ☐ -BL ■**	**-WH ☐ -BL ■**	**-WH ☐ -BL ■**	**-WH ☐ -BL ■**

Track Adaptors & Suspensions

Description	Global Track Adaptor - pre wired with a 1500mm cable, 1kg max load
Part code	**TS29**
Body colour	**-WH ☐ -BL ■**



Description	Global Track Adaptor with ring - pre wired with a 1500mm cable, 5kg max load
	TS32
	-WH ☐ -BL ■



Description	Bending Tool - to shape conductors when track has been cut
Part code	**TSV12**



Description	Adjustable Suspension Wire, 6000mm long with universal clamp
	TSP4P
	-WH ☐ -BL ■



Control Track 230V

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/control-track-230v**

A 16A mains voltage track system combining three-circuit functionality with DALI communication capability. Ideal for installations requiring advanced lighting control and flexibility.

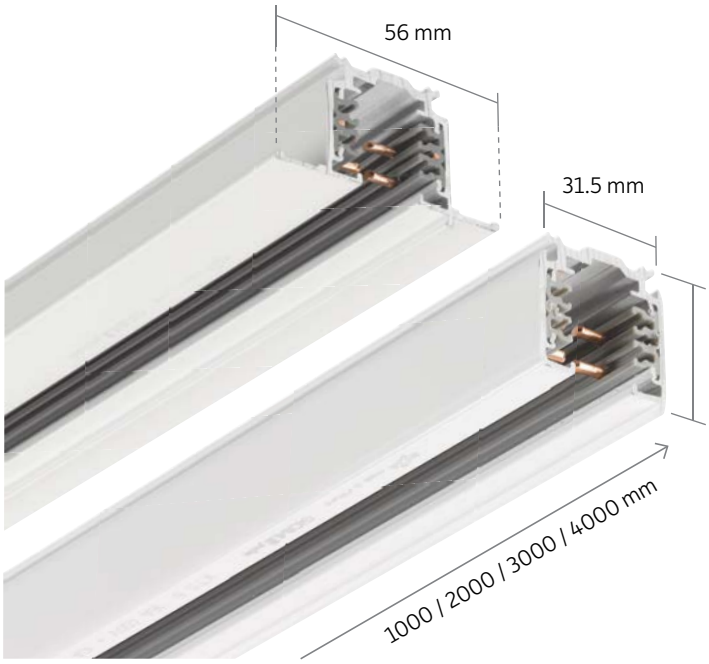

Control Track enables emergency lighting to be integrated into one of its three circuits, reducing installation costs and eliminating separate wiring. **L3** is typically used as the permanent live supply for emergency lighting.

Custom colours

Custom colour finishes available on request

Control Track 230V comes in a variety of colours and lengths:



Black finish



Silver Grey finish (recessed)

Control Track:

Control Track system contains a pair of control wires to pass the digital signal to DALI dimmable luminaires. Control Track can be surface mounted and suspended. It is also available as recessed.

Recessed Track:

Recessed Track system has the same benefits as the 3-Circuit Track but is recesssed into the ceiling which provides a clean, unobtrusive look. Ideal when a minimalistic architectural aesthetic is required.

Options / Specification:

Body colour: White, Black, Silver Grey

3-Circuit: 230V 16A

Surface mount

Suspended

IP rating: IP 20

Joinable

Recessed

How the Control Track system works

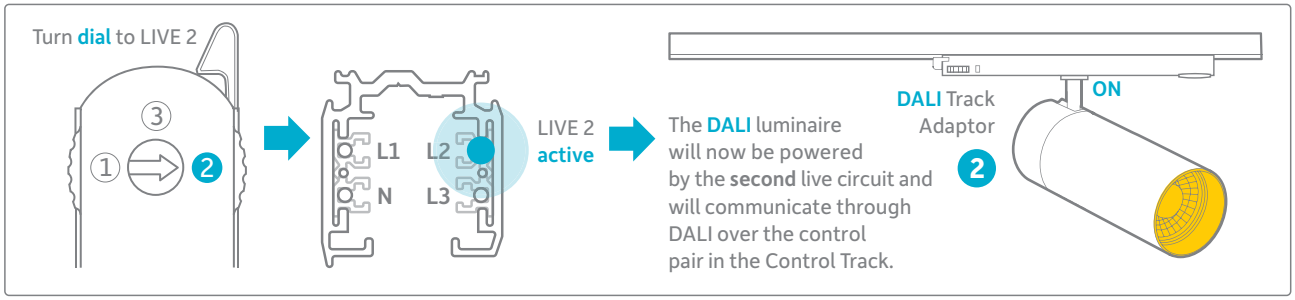

Control Track 230V

Track

Description	3-Circuit Track, 230V 3.2ft / 1000mm	3-Circuit Track, 230V 6.5ft / 2000mm	3-Circuit Track, 230V 9.8ft / 3000mm	3-Circuit Track, 230V 13.1ft / 4000mm
Part code	**TS6100**	**TS6200**	**TS6300**	**TS6400**
Recessed part code	**TSCF6100**	**TSCF6200**	**TSCF6300**	
Body colour	**-WH** ☐ **-BL** ■ **-SG** ■	**-WH** ☐ **-BL** ■ **-SG** ■	**-WH** ☐ **-BL** ■ **-SG** ■	**-WH** ☐ **-BL** ■

Live Ends, Dead Ends & Connectors (as viewed from below)







Description	Live End, 90mm Suitable for incoming mains	Live End, 90mm Suitable for incoming mains	Dead End, 3mm	Centre Feed, 170mm Suitable for incoming mains	Straight Connector. No extra length after insertion
Part code	**TSC611**	**TSC612**	**TS41**	**TSC614**	**TSC621**
Body colour	**-WH** ☐ **-BL** ■	**-WH** ☐ **-BL** ■	**-WH** ☐ **-BL** ■	**-WH** ☐ **-BL** ■	**-WH** ☐ **-BL** ■







Description	'L' Connector, 100 x 100mm Suitable for incoming mains	'L' Connector, 100 x 100mm Suitable for incoming mains	'X' Connector, 170 x 170mm Suitable for incoming mains	'T' Connector, 100 x 170mm Suitable for incoming mains	'T' Connector, 100 x 170mm Suitable for incoming mains
Part code	**TSC634**	**TSC635**	**TSC638**	**TSC636**	**TSC637**
Body colour	**-WH** ☐ **-BL** ■	**-WH** ☐ **-BL** ■	**-WH** ☐ **-BL** ■	**-WH** ☐ **-BL** ■	**-WH** ☐ **-BL** ■







Description	'T' Connector, 100 x 170mm Suitable for incoming mains	'T' Connector, 100 x 170mm Suitable for incoming mains	Flexible Connector, 0° to 180°, 215mm	Recessed Cover Plates for Recessed Track only	
Part code	**TSC639**	**TSC640**	**TSC623**	**TSCF10**	**TSCF30**
Body colour	**-WH** ☐ **-BL** ■	**-WH** ☐ **-BL** ■	**-WH** ☐ **-BL** ■	**-WH** ☐ **-BL** ■	**-WH** ☐ **-BL** ■

Track Adaptors & Suspensions

Description	Global Track Adaptor - pre wired with a 1500mm cable, 1kg max load
Part code	**TS29**
Body colour	**-WH** ☐ **-BL** ■



Description	Global Track Adaptor with ring - pre wired with a 1500mm cable, 5kg max load
Part code	**TS32**
Body colour	**-WH** ☐ **-BL** ■



Description	Bending Tool - to shape conductors when track has been cut
Part code	**TSV12**



Description	Adjustable Suspension Wire, 6000mm long with universal clamp
Part code	**TSP4P**
	-WH ☐ **-BL** ■



1-Circuit Track Polarity

Typical **PLAN VIEW** examples showing how polarity must be maintained through a 1-Circuit track layout.

The **red line** indicates the **Live (active)** side of the track. All track lengths are supplied with a Dead End (TDE1). To ensure correct operation, select only compatible components and maintain continuous polarity throughout the layout as shown below.

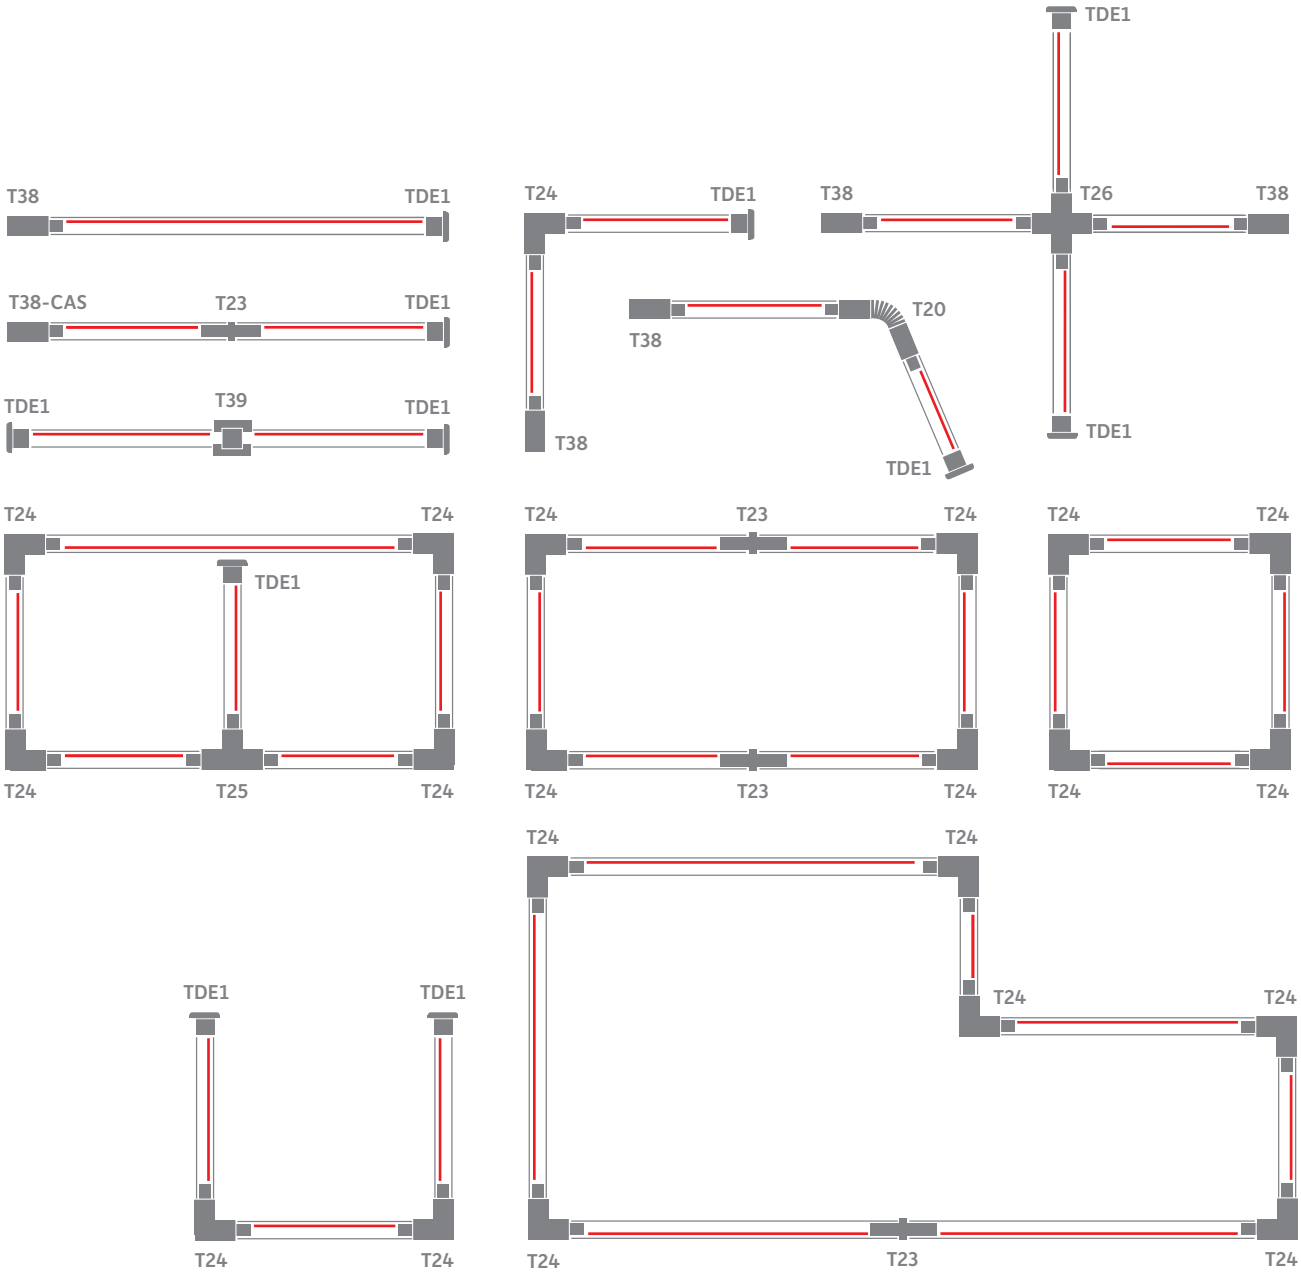

1-Circuit Track accessories:

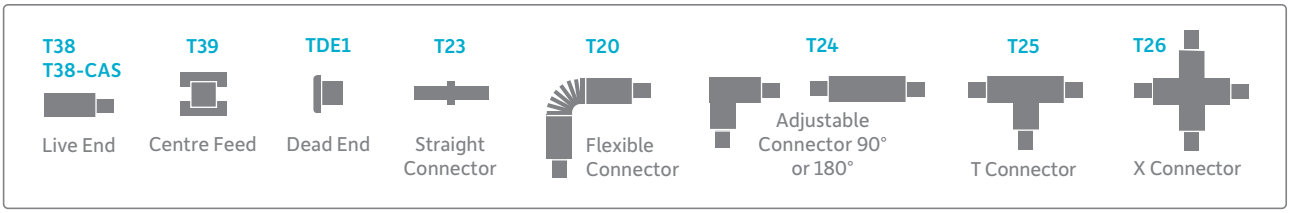

3-Circuit Track Polarity

05

Typical **PLAN VIEW** examples showing how polarity must be maintained through a 3-Circuit track layout.

The **blue line** indicates the **Neutral** side of the track. To ensure correct operation, select only compatible components and maintain continuous polarity throughout the layout as shown. The **neutral side** is indicated by a physical ridge in the track.
Note: The product codes below refer to 3 Circuit Track only.

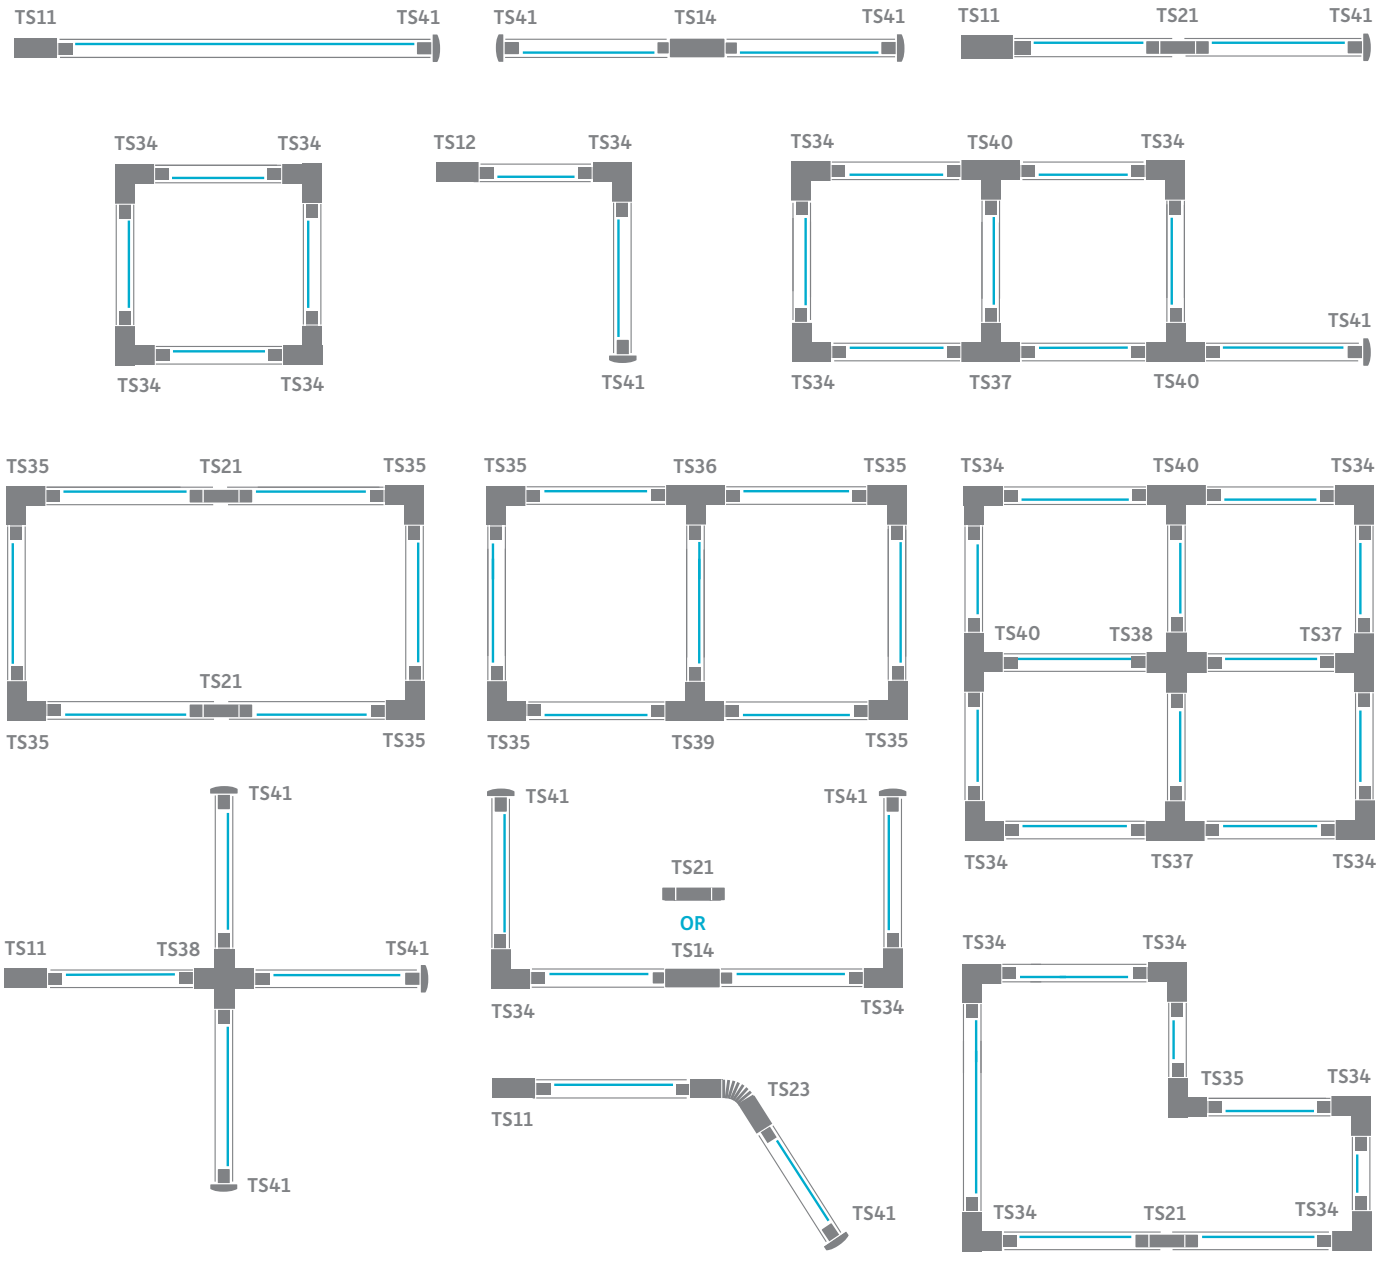

3-Circuit Track accessories:

TS11 TS12	Live End	TS21	Straight Connector	TS34 TS35	L Connector	TS38	X Connector
TS41	Dead End	TS23	Flexible Connector	TS36 TS37 TS39 TS40	T Connector	TS24	Adjustable Connector
TS14	Centre Feed						

illuma

Project downlights

Illuma's **Project 90** proved to be the ideal choice for the **Savile Row Company,** seamlessly combining a discreet recessed installation with high-impact accent lighting, that enhances the store's premium aesthetics.

Industry case study /

Savile Row Company

Savile Row / London, UK

Savile Row Company's London store presents tailored clothing and accessories in a refined retail setting where presentation is everything / Rich timber cabinetry, carefully arranged displays and a warm material palette create an environment that feels considered, traditional and distinctly premium.

Illuma's **Project 90 downlights** were selected to provide the main recessed lighting throughout the store. Their clean, compact appearance keeps the ceiling visually uncluttered, allowing the focus to remain firmly on the merchandise and interior detailing.

Positioned around the perimeter of the space, the downlights provide controlled illumination across the display cabinetry, bringing out the colour, texture and detail of the fabrics below. The directional light helps create contrast between the merchandise and surrounding joinery, giving each display greater definition without introducing excessive glare or visual distraction.

Project 90 was particularly well suited to the application, allowing the shop to maintain a sophisticated, high-end appearance while still achieving the illumination needed for a retail environment. Elsewhere in the store, **Lumapar spotlights** and **track lighting** provide additional flexibility where directional accent light is required, complementing the downlighting and adding further depth to the overall lighting.

The result is a balanced retail lighting scheme in which **Project 90 provides a subtle but highly effective foundation,** helping the clothing and finishes stand out while maintaining the refined character expected of a Savile Row environment.

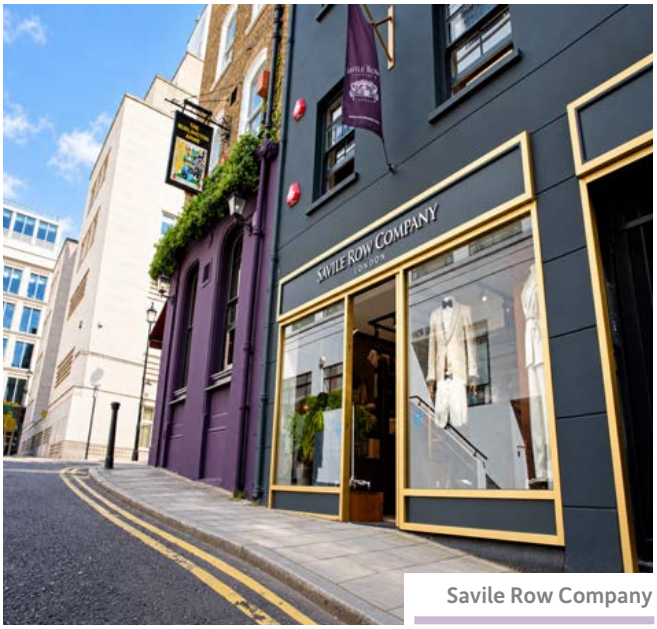

Savile Row Company



Tailoring department

Project downlights product range

06

An extensive range of highly innovative project downlights, suitable for multiple environments.



Twizzle 96



Project 90 Open 98



Project 90 Cone 100



Project 90 Gimbal 102



Project 90 Wallwash 104



Proseal F 106



Fire Hoods 108

Twizzle

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/twizzle**

A versatile adjustable downlight featuring 355° rotation and ±90° tilt. Ideal for retail, hospitality, automotive and display applications requiring flexible and highly directional illumination.



Fire Hoods

Twizzle, a unique design with surprising tilt feature and shallow profile:



Black body



As a **recessed** uplighter



Crisp and clean optic



Integral heat sink



Head in flush position



Head positioned at 90°

Options available:

Lumen output
800

Colour temp.
3000K
4000K

Bezel colour
White
Black

Beam angles
24° 40°

Bezel size
1 size

Specification:

LED chip / CRI
CREE
CRI >80

Recessed

Cut-out Ø
110 mm

IP rating
IP 20

Adjustable

Driver
Included

Dimming options
DALI 2
Casambi
Leading & trailing edge
ON/OFF

06



Twizzle

Cumbria House / Windermere, UK

Designed around open-plan living and carefully selected finishes, Cumbria House offers a refined residential setting. Twizzle forms a decorative centrepiece that adds visual interest while providing comfortable ambient illumination throughout the interior.

Project 90 Open

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/project-90-open**

A classic downlight available in multiple beam angles and lumen outputs. Suitable for a wide range of interior environments requiring reliable, efficient and comfortable general lighting.

Custom colours

Custom colour finishes available on request



Fire Hoods

Project 90 Open is available in three LED colours, including 2700K Extra Warm White:



Black bezel



Easy twist & lock connector between downlighter & driver



IP44 – Bathroom zones 2 & 3



1250lm LED light engine



625lm LED light engine



Robust fixing clips

Options available:

Lumen output
625
1250

Colour temp.
2700K
3000K
4000K

Bezel colour
White
Black

Beam angles
24° 38° 60°

Bezel size
1 size

Emergency

Specification:

LED chip / CRI
CREE
CRI >90

Recessed

Cut-out Ø
70 mm

IP rating
IP44

Driver
Included

Dimming options
DALI 2
Casambi
Leading & trailing edge
ON/OFF

06



Project 90 Open

The Residence Collection / Surrey, UK

Combining contemporary aesthetics with dependable performance, Project 90 Open provides high-quality general illumination for luxury residential interiors. The IP44-rated downlight integrates discreetly into the architecture, helping to create a calm, welcoming environment whilst complementing the premium finishes used throughout the bathroom space.

Project 90 Cone

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/project-90-cone**

A decorative downlight available in a choice of beam angles, lumen outputs and cone finishes. Ideal for hospitality, retail and commercial environments requiring accent and ambient lighting.

Custom colours

Custom colour finishes available on request



LED Light Engine (only) pivots ±60°

Fire Hoods

Project 90 Cone comes in two body colours and three cone colour options:



White bezel with **Black** cone



White bezel with **Silver** cone



White bezel with **White** cone



Crisp and clean optic



1250lm LED light engine



625lm LED light engine

Options available:

Lumen output
625
1250

Colour temp.
2700K
3000K
4000K

Bezel colour
White
Black

Cone options
Black
Silver
White

Beam angles
24° 38° 60°

Bezel size
1 size

Emergency

Specification:

LED chip / CRI
CREE
CRI >90

Recessed

Cut-out Ø
75 mm

Dimming options
DALI 2
Casambi
Leading & trailing edge

IP rating
IP 20

Anti-glare

Driver
Included

06

Project 90 Cone



The Lookout Bar & Kitchen / Sandown Ski Centre, UK

Overlooking the slopes, The Lookout Bar & Kitchen provides a relaxed setting where visitors can unwind throughout the day and into the evening. Project 90 Cone delivers clean architectural illumination that complements the interior design whilst maintaining excellent visual comfort.

Project 90 Gimbal

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/project-90-gimbal**

A versatile adjustable downlight available in multiple beam angles and lumen outputs. Ideal for applications requiring both targeted accent lighting and comfortable general illumination.

Custom colours

Custom colour finishes available on request



Light Engine combined with inner bezel pivots ±45°

Fire Hoods

Project 90 Gimbal is available in three LED colours, including 2700K Extra Warm White:



Black bezel



Easy twist & lock connector between downlighter & driver



Crisp and clean optic



1250lm LED light engine



625lm LED light engine



Robust fixing clips

Options available:

Lumen output
625
1250

Colour temp.
2700K
3000K
4000K

Bezel colour
White
Black

Beam angles
24° 38° 60°

Bezel size
1 size

Emergency

Specification:

LED chip / CRI
CREE
CRI >90

Recessed

Cut-out Ø
70 mm

IP rating
IP20

Adjustable

Driver
Included

Dimming options
DALI 2
Casambi
Leading & trailing edge

06



Project 90 Gimbal

Edit Suits / London, UK

Edit Suits combines modern tailoring with a highly personalised customer experience in an elegant retail setting. Project 90 Gimbal delivers flexible directional illumination, allowing garments, fabrics and feature displays to be showcased with exceptional precision.

Project 90 Wallwash

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/project-90-wallwash**

A dedicated Wallwash downlight designed to provide smooth, uniform vertical illumination. Ideal for highlighting architectural surfaces, displays and feature walls.

Custom colours

Custom colour finishes available on request



Project 90 Wallwash is available in three LED colours, including 2700K Extra Warm White:



Black Wallwash



Easy twist & lock connector between downlighter & driver



Crisp and clean optic



1250lm LED light engine



625lm LED light engine



Robust fixing clips

Options available:

Lumen output
625
1250

Colour temp.
2700K
3000K
4000K

Bezel colour
White
Black

Beam angles
24° 38° 60°

Bezel size
1 size

Emergency

Specification:

LED chip / CRI
CREE
CRI >90

Recessed

Cut-out Ø
75 mm

IP rating
IP20

Anti-glare

Driver
Included

Dimming options
DALI 2
Casambi
Leading & trailing edge

06

Project 90 Wallwash

Alder Court / Bristol, UK

Alder Court features thoughtfully designed communal areas that support collaboration, wellbeing and social interaction. Project 90 Wallwash creates a bright, spacious feel by delivering uniform vertical illumination that enhances both comfort and architectural presence.

Proseal F

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/proseal-f**

An IP65 fire-rated die-cast aluminium downlight designed for wet and humid environments. Ideal for bathrooms, kitchens, exterior soffits and applications requiring enhanced protection.

Custom colours

Custom colour finishes available on request



*LED Light Engine (only) pivots ±45° / Note: Can only be adjusted during installation





Crisp and clean optic



1250lm LED light engine



625lm LED light engine



Robust fixing clips

Options available:

Lumen output
625
1250

Colour temp.
2700K
3000K
4000K

Bezel colour
White

Beam angles
24° 38° 60°

Bezel sizes
1 size

Emergency

Specification:

LED chip / CRI
CREE
CRI >90

Recessed

Cut-out Ø
75 mm

Driver
Included

Dimming options
DALI 2
Casambi
Leading & trailing edge

IP rating
IP 65

Fire rated

Adjustable*

06

Proseal F

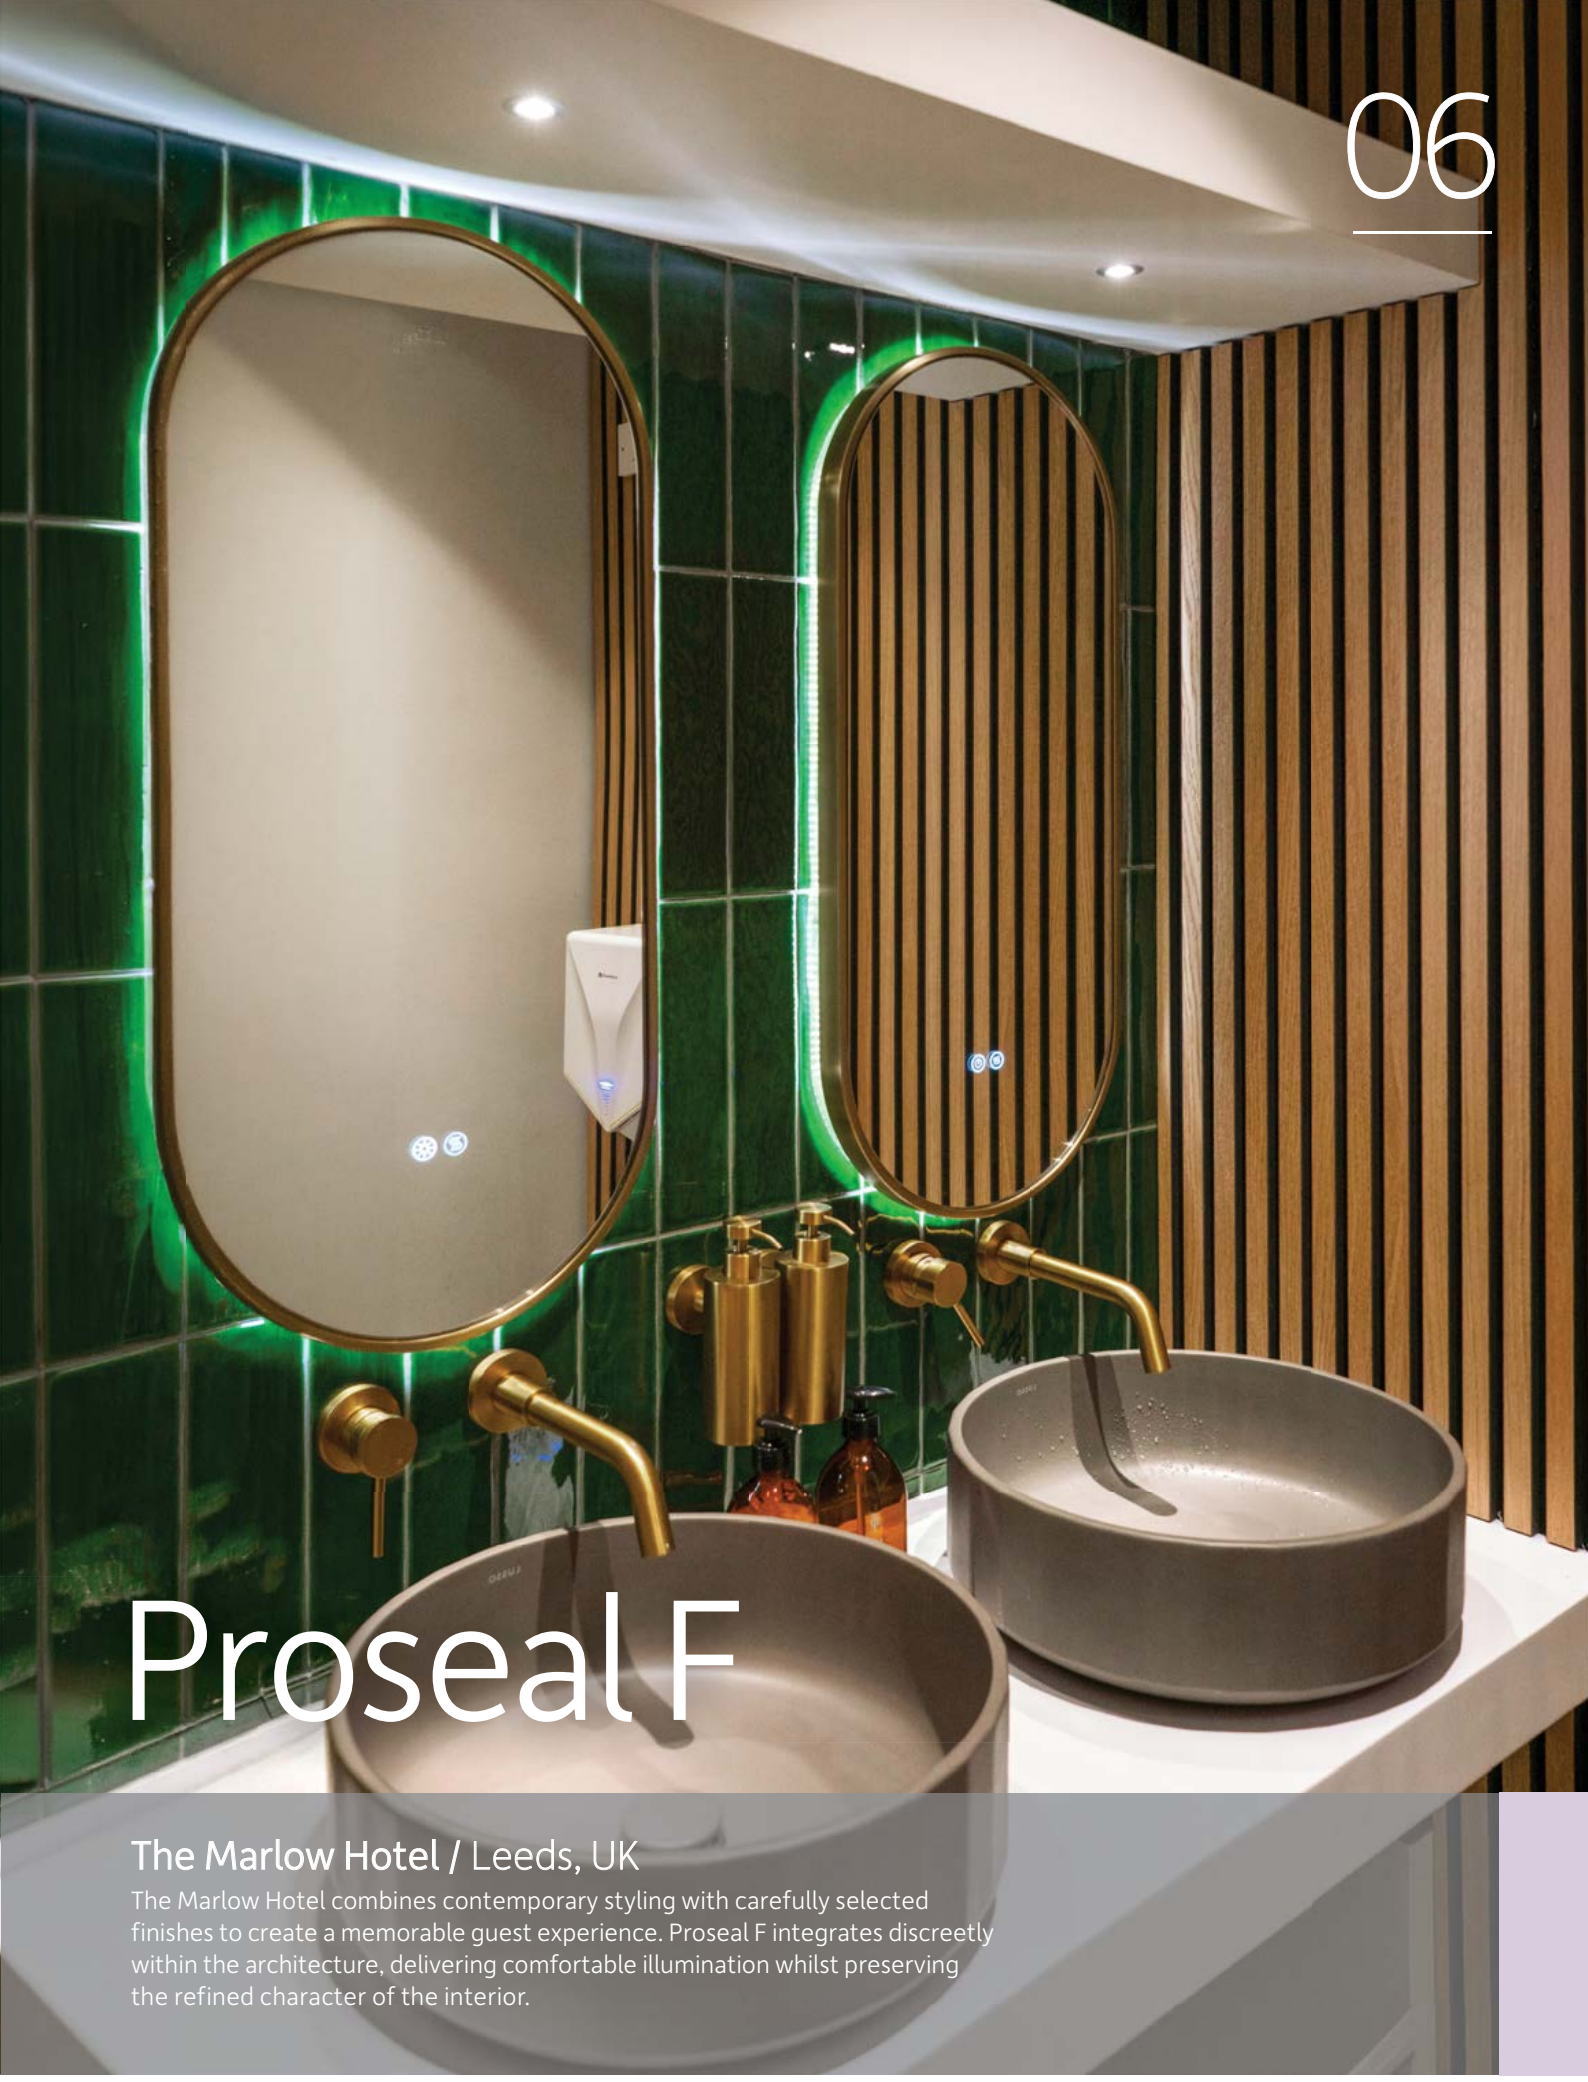

The Marlow Hotel / Leeds, UK

The Marlow Hotel combines contemporary styling with carefully selected finishes to create a memorable guest experience. Proseal F integrates discreetly within the architecture, delivering comfortable illumination whilst preserving the refined character of the interior.

Fire Hoods

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/fire-hoods**

Fire-rated enclosures designed to help maintain the fire integrity of ceilings where recessed luminaires are installed. Suitable for both new-build and refurbishment projects.

Fire Hood
Small square

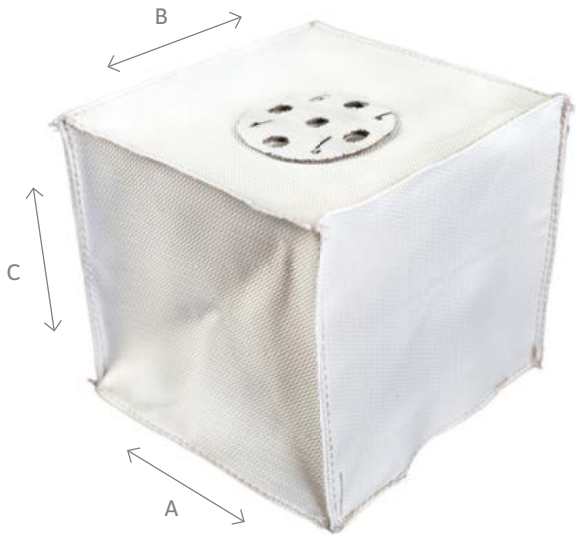

Fire Hoods
are available in **3 square sizes** and **one rectangle**:



Medium square



Large square



5 spaces for multi-wiring



Inside view



Top view



Rectanglar option

Options available:

Body sizes



	A	B	C
FH001	150	150	120
FH002	180	180	170
FH003	350	350	230
FH004	250	400	200

Look out for the **Fire Hood icon** throughout the catalogue and website to see which products are compatible:





Fire Hoods (square & rectangular)

Illuma's range of Fire Hoods are 60 minute rated and come in small, medium, large square and rectangular sizes. All Fire Hoods are tested to BS476 Parts 22 & 23 standards.

Features and benefits:

- Comes in 4 sizes to fit various Illuma products /
- Easy installation /
- Provides basic fire protection for non-fire rated downlights /
- 5 spaces for multi-wire installation /

Square Fire Hood



Rectangular Fire Hood

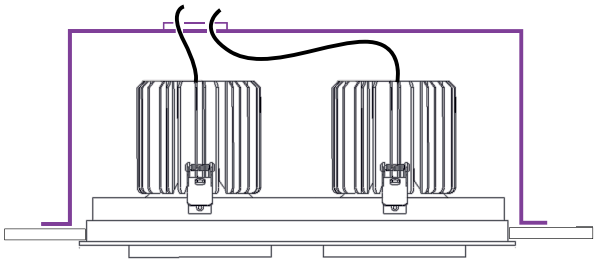

Compatibility:

FH001 (small):

- Infinia Mini
- Infinia 900lm
- Infinia 1200lm
- Project 90 625lm
- Project 90 1250lm (Open / Gimbal)
- Twizzle

FH002 (medium):

- Arc
- Hexseal Small
- Highlux Fixed
- Highlux Gimbal
- Infinia 2200lm
- Infinia 2600lm
- Project 90 1250lm (Wallwash / Cones)

FH003 (large square):

- Hexseal Large
- Lightseal
- Single Framelight
- Unilux

FH004 (rectangular):

- Double Framelight

illuma

Commercial downlights

Illuma installed a range of commercial downlights and spotlights for the **Nôsa Bathrooms** showroom in Harrogate, including the **Infinia** family of downlights for a more discreet ceiling presence.

Industry case study /

Nôsa Bathrooms

Showroom / Harrogate, UK

Nôsa Bathrooms combines luxury bathroom displays with a carefully curated selection of finishes, surfaces and fittings /

With materials ranging from stone and marble to glass, metal and timber, the lighting needed to reveal texture and detail while maintaining the refined, residential feel of the showroom.

Illuma's **Infinia** and **Infinia Mini downlights** form a key part of the scheme. **Infinia**, used in both round and square formats, provides controlled, focused illumination across the displays, creating defined pools of light that bring depth to the interiors and emphasise the quality of the materials below.

The compact **Infinia Mini** allows the same considered approach in areas where a more discreet ceiling presence is required. Its minimal scale helps keep the ceiling visually clean, allowing attention to remain on the bathroom displays while still providing precise accent and general illumination.

Layered alongside the downlights, **3-Circuit Track** with **Concepta** and **Lumapar spotlights** provides additional directional lighting for feature displays, finishes and merchandise. **2ube Pendants** introduce a decorative element around the till area, adding another level to the overall scheme.

The result is a carefully layered lighting environment in which the **Infinia** family provides the architectural foundation - balancing visual comfort, focused illumination and a discreet aesthetic to present Nôsa's bathrooms and finishes at their best.



Nôsa bathrooms

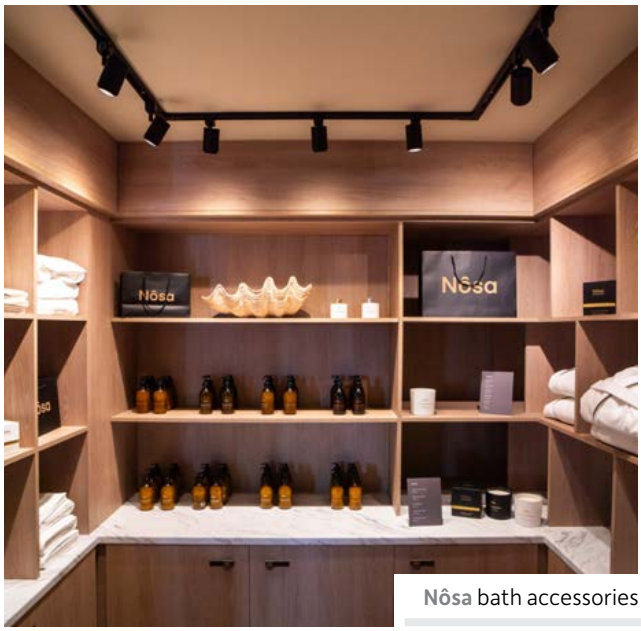

Nôsa bath accessories

Commercial downlights product range

07

An extensive range of highly innovative, commercial downlights suitable for multiple environments.



Infinia 112



Infinia Mini 116



Arc 118



Framelight 120



Highlux Fixed 122



Highlux Gimbal 124



Highlux Surface 126



Hexseal 128



Unilux 130



Lightseal 132

3D Ceiling Adaptor Ring 134

Introducing

Infinia

Infinite possibilities /

A concept of unique customisable downlights with extensive options ideally suited for use in hotels, galleries and museums /











Dim to warm
The 900lm small head is a 'Dim to Warm'. At 100% it exhibits a Warm White light (3000K) but it can be dimmed down to the colour of Candle light (1800K).

illuma / products / **Infinia**

Features
Four lumen outputs. Four beam angles. Four bezel options. Multiple colour finishes. A variety of trim, colour & filtering options.

Filter options:



Honeycomb
Reduces glare



Spreader
Elongates and spreads the luminaire's beam



Solite
Provides reduced glare delivering a soft beam without striations

Find your Infinia solution...



Round Black
Black chrome cone



Square Black
Black cone



Round White
Gold cone



Square White
Silver cone



Round Black
Gold cone

The Infinia range is available with an extensive number of options.

For specification, assistance or any special requests on the Infinia range please contact Illuma.

7 custom options

7 Options

The Infinia range can be customised with seven different options:



1 Colour temperature options

Our Infinia range of downlights is designed to cater for a diverse range of applications. Our light engines are available in three Kelvin temperatures, often referred to as CCT (correlated colour temperature). Choose from Extra Warm White (2700K), Warm White (3000K) and Neutral White (4000K) options.

2 Lumen output options

The Infinia family of LED downlights was designed with multi applications in mind. Choose from four lumen output options in three different sizes, including Small (900lm & 1200lm), Medium (2200lm) and Large (2600lm).



3 Dimming options

Controls are an important factor when it comes to creating the desired mood in any interior. Our Infinia family is available in a variety of dimming options. Choose from DALI 2, Casambi and Leading & Trailing Edge dimmable options.

4 Beam options

As beam angles are the lighting designer's palette, the Infinia range offers a choice of beam angles, including 15°, 24°, 38° and 60° to suit all environments.



5 Filter options

Filters can control the intensity and projection of light. Choose from three filter options including Honeycomb, Spreader and Solite – must be specified at the time of ordering.



6 Bezel options

The Infinia family of LED downlights was specifically designed with versatility and flexibility in mind. Choose from four bezel options in three different sizes, including Square, Square Trimless, Round and Round Trimless.

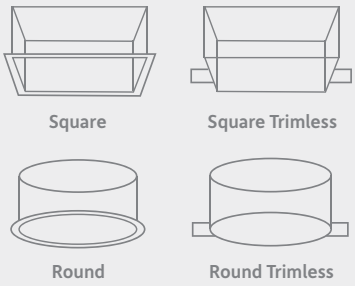

7 Trim / Colour options

The aesthetics of a lighting solution can complete a lighting design. The Infinia range is available in a variety of trim / colour options*.





*Alternative colour finishes may be available by special request. Minimum order quantities may apply - enquire at the time of specification.

Infinia *continued*

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/infinia**

A highly configurable downlight range offering thousands of combinations, enabling lighting designers to create bespoke solutions for any interior. Delivering exceptional specification flexibility without compromising aesthetics.

Custom colours

Custom colour finishes available on request



Honeycomb filter option

Fire Hoods

Infinia comes in a variety of customisable styles and options:



Spreader filter option



Solite filter option

Options available:

Lumen output
900 1200
2200 2600

Colour temp.
2700K
3000K
4000K

Dim to warm

Trim colour
White
Black
Silver
Gold
Black chrome

Filters
Honeycomb
Spreader
Solite

Beam angles
15° 24°
38° 60°

Bezel sizes
S M L

Emergency

Specification:

LED chip / CRI
Luminus
CRI >90

Recessed

Dimming options
DALI 2
Casambi
Leading & trailing edge

IP rating
IP44

Adjustable

Bezel options

Bezel colour
White
Black

Trimless square cone

Square cone

Bezel sizes

Square	
S	87 x 87
M	110 x 110
L	133 x 133

Trimless round cone

Round cone

Bezel sizes

Round	
S	87 dia.
M	110 dia.
L	133 dia.

07



Infinia

Apex Motorsport Suite / Surrey, UK

Inspired by performance engineering and automotive design, the Apex Motorsport Suite balances luxury with functionality. Infinia delivers seamless lines of illumination that reinforce the architectural language of the space whilst creating a calm, focused working environment.

Infinia Mini

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/infinia-mini**

A miniature aluminium downlight developed for discreet feature lighting. Ideal for retail displays, hospitality environments and premium residential applications requiring subtle illumination.

Custom colours

Custom colour finishes available on request

LED Light Engine
pivots ±20°



Comes complete with the following **cone options** to suit any interior:
Gold Cone / Chrome Cone /White Cone / Black Cone

Fire Hoods

Infinia Mini
comes in a variety of styles and options:



White bezel with **White** Cone



Black bezel with **Black** Cone



Crisp and clean optic



Inbuilt heat sink



Vertical tilt 20°



Four cone options included

Options available:

Lumen output: 500

Colour temp.: 2700K / 3000K

Bezel colour: White / Black

Beam angle: 15°

Bezel size: 1 size

Specification:

LED chip / CRI: Luminus CRI >90

Recessed

Cut-out Ø: 35 mm

Driver: Included

Dimming: Leading & trailing edge

IP rating: IP20

Anti-glare

Adjustable

07



Infinia Mini

Nôsa Bathrooms / Harrogate, UK

Nôsa Bathrooms showcases premium bathroom collections within a sophisticated showroom centred on materials and craftsmanship. Infinia Mini provides precise accent illumination that reveals textures, finishes and product details whilst maintaining a clean architectural appearance.

Arc

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/arc**

A specialist downlighting solution developed for the uniform illumination of vertical surfaces. Ideal for retail, leisure and commercial applications where wall presentation is a priority.

Features an Alanod reflector which is 97% efficient!



Arc comes in one body size, two colours and a range of beam angles:



White option



Black option



Crisp and clean optic



Integral heat sink



Adjustable head



Recessed spring clips

Options available:

Lumen output

Selectable
2000 2400 3100 3600

Colour temp.

3000K
4000K

Beam angles

24° 36° 60°

Bezel size

1 size

Bezel colour

White
Black

Specification:

LED chip / CRI

Bridgelux CRI >90

Recessed

Cut-out Ø

120 mm

IP rating

IP 20

Adjustable

Driver

Included

Dimming options

DALI 2
Casambi
Leading & trailing edge

07

Arc

Ben Sherman Store / London, UK

Ben Sherman's retail environment celebrates decades of British menswear heritage through a carefully considered store design. Arc delivers high-quality accent illumination that enhances fabrics, colours and displays whilst supporting the distinctive identity of the brand.

Framelight

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/framelight**

A discreet architectural lighting solution designed to create a clean and unobtrusive ceiling appearance. Ideal for retail, leisure and commercial applications requiring visual simplicity.

2 Way
Framelight



	L	W
Single	185	185
2 Way	340	185
3 Way	487	185

Heads
pivot ±45°
on two axes

Fire Hoods

Note: Lumen outputs quoted are per LED head

Framelight
is available in Single, 2 Way and 3 Way versions:



Single Framelight



Integral heat sinks



Strong fixing clips



Crisp and clean optic



3 Way Framelight (individual drivers supplied)

Options available:

Lumen output
2000 3000 4000

Colour temp.
3000K
4000K

Body colour
White

Beam angles
24° 38°

Frame sizes
Single 2 Way 3 Way

Specification:

LED chip / CRI
Citizen CRI >80

Recessed

Cut-out (single)
170x170 mm

Cut-out (2 Way)
170x320 mm

Dimming options
DALI 2
Casambi
Leading & trailing edge

IP rating
IP 20

Adjustable

Cut-out (3 Way)
170x480 mm

Driver (s)
Included

07



Framelight

LIVHOME / Liverpool, UK

LIVHOME's flagship showroom presents carefully curated furniture collections within an inspirational residential-style setting. Framelight creates visual structure throughout the space, drawing attention to featured displays whilst supporting an intuitive customer journey.

Highlux Fixed

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/highlux-fixed**

A stylish fixed downlight range available in multiple beam angles and lumen outputs. Suitable for retail, leisure and display environments requiring efficient general illumination.

Custom colours

Custom colour finishes available on request

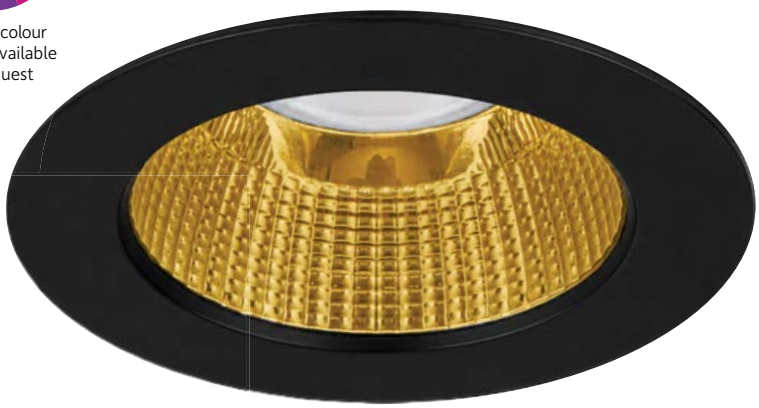

Gold cone option in black

Fire Hoods

Highlux Fixed comes in one body size, two bezel colours and four different cone colour options:



White cone option



Black cone option



Directional lens



Recessed fixing clips



Efficient heatsink



Gold cone option

Options available:

Lumen output

Selectable

2000 2500 2750
3100 3400 3600

Colour temp.

2700K
3000K
4000K

Bezel colour

White
Black

Cone colours

White
Black
Silver
Gold

Beam angles

24° 38° 60°

Bezel size

1 size

Emergency

Specification:

LED chip / CRI

Bridgelux CRI >90

Recessed

Dimming options

DALI 2
Casambi
Leading & trailing edge

IP rating

IP40

Cut-out Ø

120 mm

07



Highlux Fixed

Foray Motor Group / Nationwide, UK

Foray Motor Group showrooms require lighting that presents vehicles with exceptional clarity and consistency across every location. Highlux Fixed delivers excellent visual comfort and colour rendition, ensuring vehicle finishes and design details are showcased to their full potential.

Highlux Gimbal

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/highlux-gimbal**

An adjustable downlight range offering flexible aiming and excellent visual comfort. Ideal for retail, leisure and display environments where illumination requirements may vary.

Silver cone option in black



Fire Hoods



Highlux Gimbal comes in one body size, two bezel colours and four different cone colours:



White cone option



Black cone option



Crisp and clean optic



Recessed fixing clips



Integrated heatsink



Gold cone option

Options available:

Lumen output

Selectable
2000 2500 2750
3100 3400 3600

Colour temp.

2700K
3000K
4000K

Cone colours

White
Black
Silver
Gold

Beam angles

24° 38° 60°

Bezel size

1 size

Bezel colour

White
Black

Specification:

LED chip / CRI

Bridgelux CRI >90

Recessed

Cut-out Ø

140 mm

Dimming options

DALI 2
Casambi
Leading & trailing edge

IP rating

IP20

Driver

Included

Adjustable

07



Highlux Gimbal

HSL / Tunbridge Wells, UK

HSL's showroom has been designed around comfort, craftsmanship and customer experience. Highlux Gimbal provides adjustable accent illumination that highlights furniture collections, helping visitors appreciate materials, textures and detailing throughout the space.

Highlux Surface

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/highlux-surface**

A contemporary surface-mounted luminaire suitable for leisure, hospitality and commercial interiors requiring either general illumination or feature lighting.



Highlux Surface comes in two colour options:



Black option



Side profile



Crisp and clean optic



Silver inner reflector



Surface fixing plate



Back of luminaire

Options available:

Lumen output: 2000

Colour temp.: 3000K, 4000K

Body colour: White, Black

Beam angles: 38°

Body size: 1 size

Emergency

Specification:

LED chip / CRI: CREE, CRI >90

Surface mount

IP rating: IP20

Driver: Integral

Dimming options: DALI 2, Leading & trailing edge

07



Highlux Surface

Notorious Communications / Manchester, UK

Notorious Communications occupies a vibrant workplace designed to encourage creativity, collaboration and innovation. Highlux Surface provides comfortable, consistent illumination that supports productivity whilst complementing the contemporary architectural features of the office.

Hexseal

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/hexseal**

A low-glare luminaire featuring multi-diffused optics and a slim profile. Ideal for applications with shallow ceiling voids requiring visual comfort and installation flexibility.

Custom colours

Custom colour finishes available on request



ø 160 mm / 210 mm

Fire Hoods

Hexseal is a shallow low glare IP44 rated downlighter with a high CRI:



Small (2000lm) White



Large (3000lm) Black



Multi-diffused optics



Shallow profile (40mm depth)



Integral heat sink



Strong fixing clips

Options available:

Lumen output
2000
3000

Colour temp.
3000K
4000K

Bezel colour
White
Black

Beam angles
60°

Bezel sizes
S L

Emergency

Specification:

LED chip / CRI
Illuma
CRI >90

Recessed

Cut-out Ø
150/200 mm

IP rating
IP44

Anti-glare

Driver
Included

Dimming options
DALI 2
Casambi
Leading & trailing edge
ON/OFF



07

Hexseal

University of Manchester / Manchester, UK

The University of Manchester required a durable lighting solution capable of supporting busy educational spaces. Hexseal delivers dependable, efficient illumination that enhances visibility throughout the facility whilst meeting the demands of daily academic activity.

Unilux

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/unilux**

Designed to accommodate a wide range of ceiling cut-outs, Unilux is the ideal solution for refurbishment projects, combining impressive performance with exceptional installation flexibility across diverse applications.



Unilux
is a powerful compact downlight:



White option



Black option



Crisp and clean optic



Powerful light engine



Integral heat sink



Strong fixing clips

Options available:

Lumen output
Selectable
2000 2300 2600
2800 3100 3400 3600

Bezel colour
White
Black

Beam angles
24° 38°
60°

Colour temp.
3000K
4000K

Bezel size
1 size

Specification:

LED chip / CRI
Illuma
CRI >90

Recessed

Adjustable cut-out Ø
80 to 170 mm

Adjustable plate

Dimming options
DALI 2
Casambi
Leading & trailing edge

IP rating
IP 20

Anti-glare

Driver
Included

07



Unilux

VIVAIA / London, UK

VIVAIA's retail concept showcases sustainable footwear within a carefully curated shopping environment. Unilux provides focused accent illumination that highlights product displays, materials and key collections whilst reinforcing the brand's modern aesthetic.

Lightseal

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/lightseal**

A slim IP65-rated downlight offering minimal recess depth and excellent visual comfort. Ideal for commercial, hospitality and residential environments requiring discreet illumination.

Custom colours

Custom colour finishes available on request



Fire Hoods

Lightseal is a shallow IP65 rated downlighter with an opal diffuser:



Black option (2200lm)



White option (1700lm)



Dual layered diffuser



Shallow profile



Integral heat sink



Strong fixing clips

Options available:

Lumen output
1700
2200

Colour temp.
3000K
4000K

Bezel colour
White
Black

Beam angles
110°

Bezel sizes
S L

Emergency

Specification:

LED chip / CRI
MTC
CRI >80

Recessed

Cut-out Ø
170/210 mm

IP rating
IP 65

Driver
Included

Dimming options
DALI 2
Casambi
Leading & trailing edge
ON/OFF

07



Lightseal

Porsche Collection Gallery / Surrey, UK

This private Porsche collection is displayed within a purpose-designed setting focused on presentation and craftsmanship. Lightseal delivers discreet architectural illumination that reveals vehicle contours and finishes whilst allowing the collection to remain the focal point.

3D Ceiling Adaptor Ring

The **problem** /

The **existing ceiling hole** is too large for your new downlight /

Many existing ceilings have larger cut-out holes from older fittings /

Modern LED downlights are often smaller, which can mean the fitting simply falls through the existing cut out.

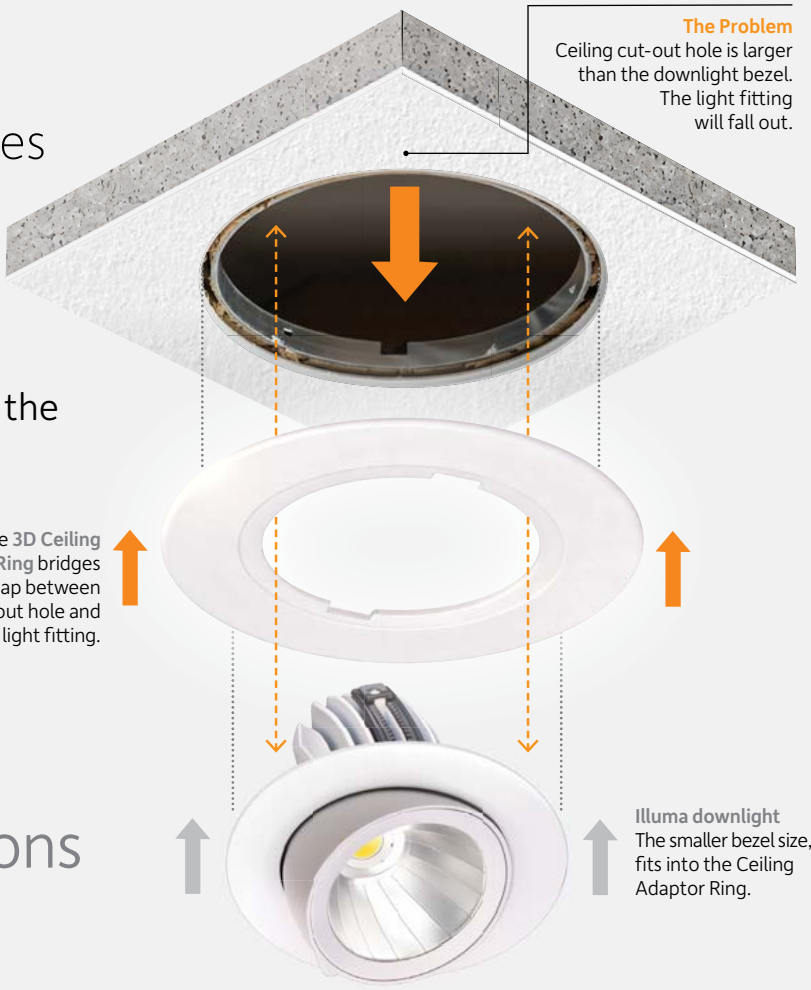

illuma /
3D Ceiling
Adaptor Ring

+15 CAR options available:

Body sizes

S L

More bespoke combinations can be supplied. Enquire for details /

Compatible with Project Downlights:


Twizzle


Project 90

Compatible with Commercial Downlights:


Infinia

The **solution** /

A **3D Ceiling Adaptor Ring** adapts the hole /

The **3D Ceiling Adaptor Ring** (CAR) sits between the ceiling and your downlight, neatly adapting larger cut-out holes so your chosen **Illuma** fitting can be installed perfectly.



Recessed design for a cleaner finish /

A recessed seat is built into the 3D Ceiling Adaptor Ring, so the downlight sits into the ring, creating a more flush, professional finish in the ceiling.

Less protruding / More refined



Illuma downlight fits seamlessly into the 3D Ceiling Adaptor Ring.

Just four simple steps:

1 Measure the existing hole



Measure the diameter of your ceiling cut-out hole

2 Choose your Illuma light



Select from our Commercial or Project downlight ranges

3 We specify the correct 3D CAR



We'll **match** the correct sized 3D Ceiling Adaptor Ring for your cut-out and downlight

4 Install for a seamless finish



A **seamless** finish is achieved with a professional result.



Arc



Framelight



Highlux fixed



Highlux Gimbal



Hexseal

illuma

Feature

Illuma installed the **2ube Pendant** at **Acorn Insurance** in Mersey House, Liverpool, using a **3-Circuit Track** system, for a distinctive but practical lighting scheme.

Industry case study /

Acorn Insurance

Mersey House / Liverpool, UK

Acorn Insurance's workspace at Mersey House, Liverpool combines a contemporary office interior with the building's more industrial character / Warm timber finishes, dark ceilings and exposed structural elements create a distinctive environment, with the lighting helping to define the different working and breakout areas.

Illuma's **2ube Pendants** were selected to compliment this architectural style. In this installation, the luminaires are mounted onto **3-Circuit Track**, allowing the scheme to work naturally with the open ceiling structure while offering greater flexibility over positioning and control.

The cylindrical pendants create focused pools of light over circulation routes, seating areas and workspaces. Their simple black form blends into the dark ceiling, while the light below adds warmth and definition to the timber finishes and furnishings.

Using **2ube Pendant** on **3-Circuit Track** also gives the scheme valuable adaptability. Individual pendants can be repositioned along the track and assigned to different circuits, allowing the lighting to respond more easily to changes in layout and how the space is used.

The result is a distinctive yet practical lighting scheme that combines the visual impact of pendant lighting with the flexibility of **Illuma**'s **3-Circuit Track system.**





Feature product range

08

A pioneering range of stylish feature solutions, ideal for environments requiring mood creation or to create an eye-catching focal point.



Ambit 138



2ube Pendant 140



2ube Pendant Shades 142

Prismalo 144

Disk Pendant 146



Disk Wall 146



Uniseal 148



Upline 150

Ambit

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/ambit**

A stylish halo-style pendant available in three sizes. Ideal for hospitality and commercial interiors where a strong decorative statement and comfortable ambient illumination are required.

Selectable colour temperature:



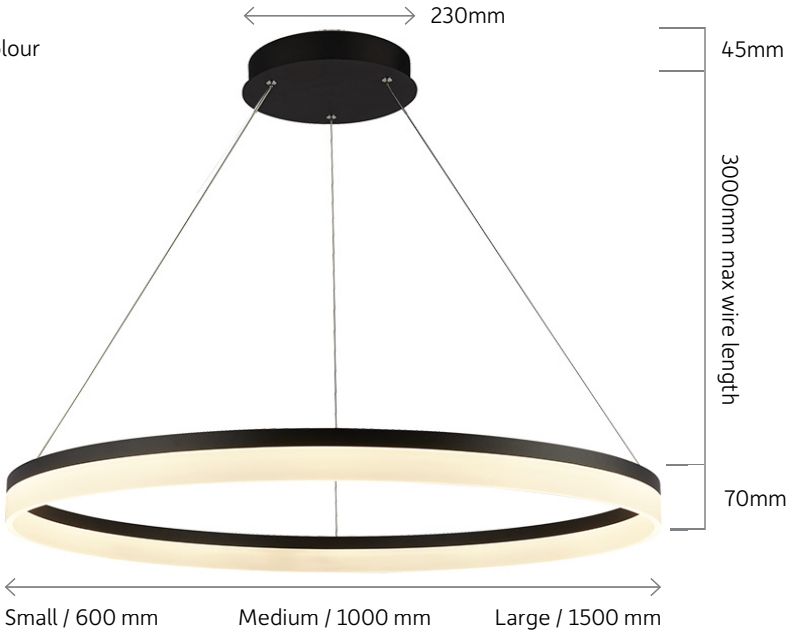

Ambit is available in 3 ring sizes **600mm**, **1000mm** and **1500mm**. Double **Ambit** only available in a combination of **600mm** & **1000mm** sizes:



White small (600mm)



Gold medium (1000mm)



Surface Mount Base



Adjustable suspension wires



Double (comb. 600 & 1000 only)



Bronze large (1500mm)

Options available:

Lumen output



Colour temp.



Surface mount



Body colour



Body sizes



Specification:

LED chip / CRI



Adjustable



Bi-directional



IP rating



Wide beam



Dimming options



08

Ambit



Taunton School Music Room / Taunton, UK

The music room at Taunton School supports rehearsal, teaching and performance within a flexible educational setting. Ambit delivers balanced illumination that enhances visibility and concentration whilst providing a comfortable environment for students and staff.

2ube Pendant

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/2ube-pendant**

A stylish compact pendant delivering low-glare illumination. Ideal for restaurants, bars, cafés, foyers and reception areas seeking a warm and inviting atmosphere.



Dim to warm
At 100% it exhibits a Warm White light (3000K) but it can be dimmed down to 2000K which is close to the colour of Candle light (1800K)

2ube Pendant comes with a 1350mm power cable as standard. **Recessed Mono Point** and **Surface Plate** can be adjusted on site. **Track Adaptor** versions are made to order and the length of power cable must be specified at the time of ordering:



Honeycomb Louvre option



Standard option



Surface Plate option



Recessed Mono Point option



Track adaptor option

Options available:

Lumen output: 1470
Body colour: Black
Track mount
Recessed mono
Option styles: Standard, Honeycomb
Beam angles: 24°
Body size: 1 size
Surface mount
Accessories: Shades

Specification:

LED chip / CRI: Bridgelux CRI >80
Mono cut-out Ø: 60 mm
Dimming options: DALI 2, Casambi, Dim to warm
IP rating: IP20
Anti-glare

08

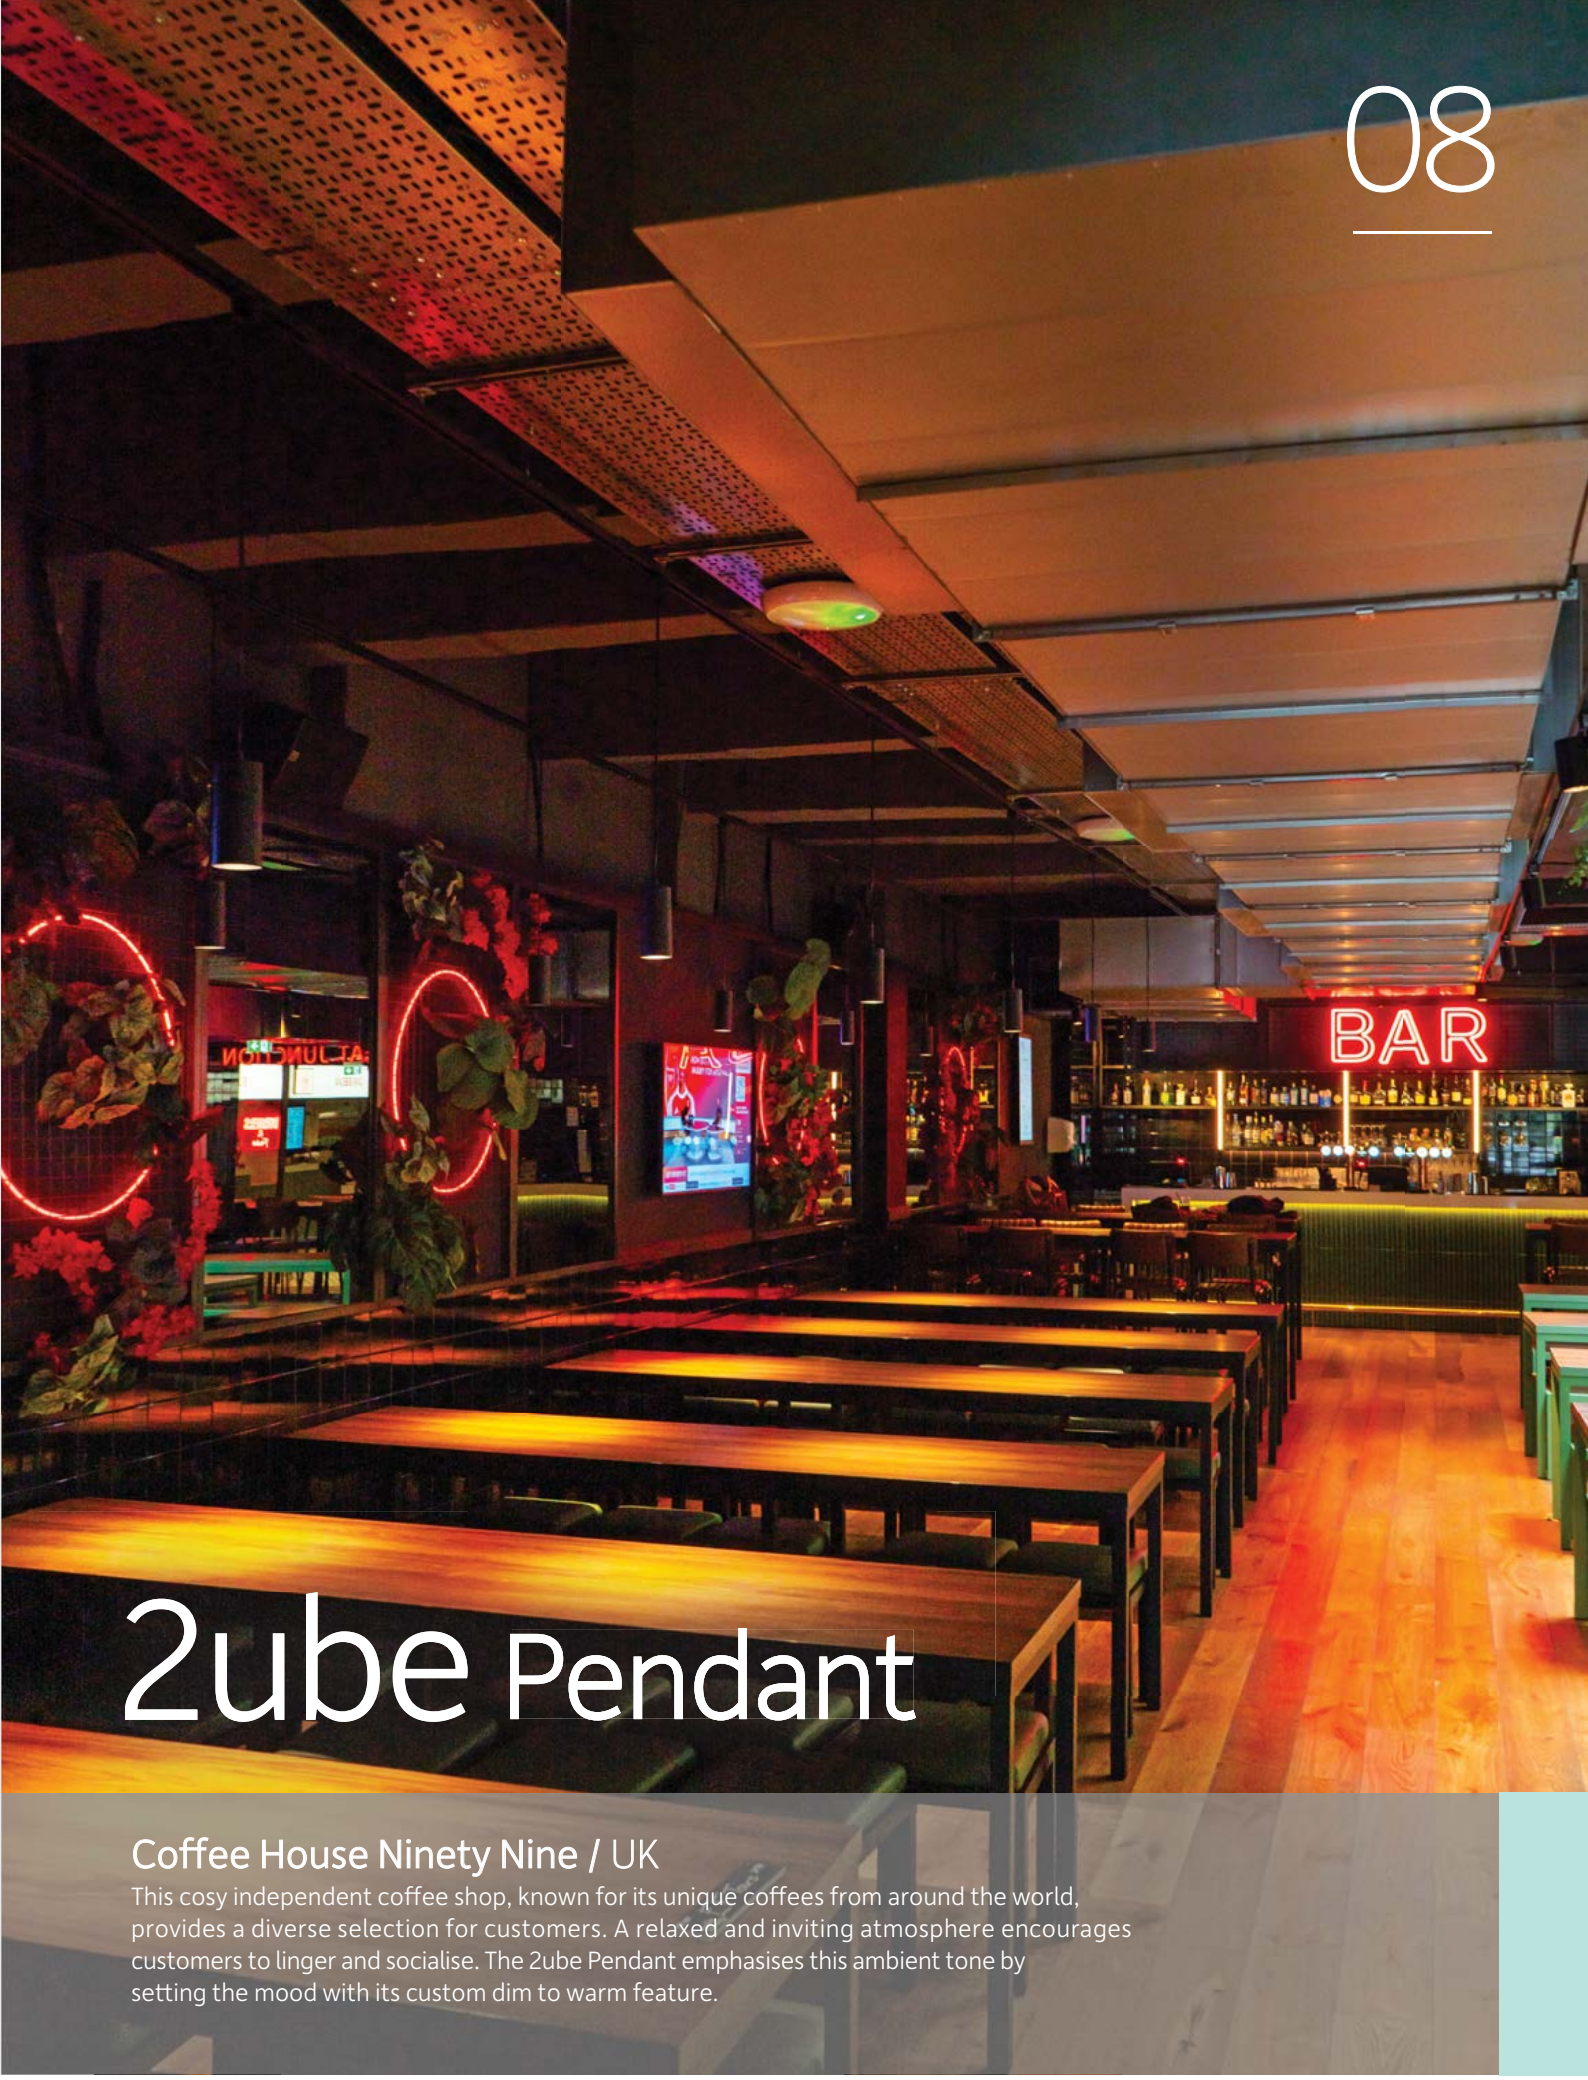

2ube Pendant

Coffee House Ninety Nine / UK

This cosy independent coffee shop, known for its unique coffees from around the world, provides a diverse selection for customers. A relaxed and inviting atmosphere encourages customers to linger and socialise. The 2ube Pendant emphasises this ambient tone by setting the mood with its custom dim to warm feature.

2ube Pendant Shades

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/2ube-pendant-shades**

A unique range of 3D-printed shade accessories designed to complement the 2ube Pendant. Ideal for enhancing decorative impact within hospitality and commercial interiors.

Dim to warm
At 100% it exhibits a Warm White light (3000K) but it can be dimmed down to 2000K which is close to the colour of Candle light (1800K)



2ube Pendant Shades are available in 4 unique **shade** designs and 7 colours with a mix of finishes:



Swirl in Matt Black option



Sustainably made

Shade style **options:**



Spire Metal Gold



Bloom Matt Red



Swirl Metal Cobalt



Ridge Bright Green

Shade colour **options:**

Material:

Each shade is made from PLA Bioplastic which is a plant based renewable resource

PLA Bioplastic

Shade colour

Matt Black	Matt Red	Metal Cobalt	Metal Gold	Bright Green	Bold Pink	Bold Turquoise



08

2ube Pendant Shades

Maple House / Cheshire, UK

A carefully considered palette of colours, materials and finishes creates a distinctive contemporary kitchen at the heart of the home. 2ube Pendant Shades provide a decorative focal point above the island, adding personality and visual interest whilst contributing comfortable ambient illumination.

Prismalo

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/prismalo**

A versatile luminaire available in suspended and surface-mounted formats. Featuring a subtle halo effect when wall or ceiling mounted, it combines contemporary architectural styling with high-performance illumination for hospitality, workplace and commercial interiors.



Suspended version supplied with 2 metre suspension wires

Prismalo is available in three sizes and two colours:



Black option



Suspended option



Opal diffuser



Rounded design



Flush mounted to ceiling



Selectable colour temperature

Options available:

Lumen output

Selectable

400mm	400-4800
600mm	600-6000
800mm	800-7200

3 sizes / output versions

Colour temp.

Selectable

3000-4000K

Body colour

White

Black

Vertical mount

Beam angles

Up: 120°
Down: 90°

Surface mount

Suspended

Specification:

LED chip / CRI

Illuma

CRI >90

Adjustable

IP rating

IP 20

Emergency

Dimming options

DALI 2

ON/OFF

08



Prismalo

The Park Hotel / UK

This luxurious and quirky lobby serves as a hub for guests to gather and interact. A modern and sleek look, designed with elegant décor creates a memorable and enjoyable experience for the guests. The Prismalo compliments this space perfectly, creating an atmospheric ambience.

Disk

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/disk**

A contemporary range of circular pendants and adjustable wall luminaires available in multiple sizes. Designed to provide comfortable ambient illumination with strong visual appeal.



Small / 120 mm | Medium / 200 mm | Large / 300 mm

Disk Pendant & Disk Wall come in a range of sizes and a variety of options:



Disk Wall option



Dia. 200mm x Height 206mm



Opal diffuser



Adjustable cable 1650mm



Recessed spring clips



Wall head pivots ±90° lm

Options available:

Lumen output
1200 2500 3000 Pendant

Lumen output
2500 Wall

Colour temp.
3000K
4000K

Body colour
White

Recessed mono

Beam angles
120°

Pendant body sizes
3 sizes

Wall body size
1 size

Track mount

Vertical mount

Specification:

LED chip / CRI
Seoul-Semi CRI >80

Mono cut-out Ø
90 mm

Dimming options
DALI 2
Leading & trailing edge
Note: Wall option is DALI 2 only

IP rating
IP 20

Wide beam

08

Disk



St. Paul's Chapel / Norton Lees, UK

A carefully restored interior combines historic architectural features with the flexibility required for modern community use. Disk delivers balanced ambient illumination that enhances visual comfort whilst respecting the character and integrity of the space.

Uniseal

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/uniseal**

A robust IP65-rated luminaire ideally suited to educational, retail, leisure and commercial environments requiring reliable and efficient general illumination.

Microwave sensor option available

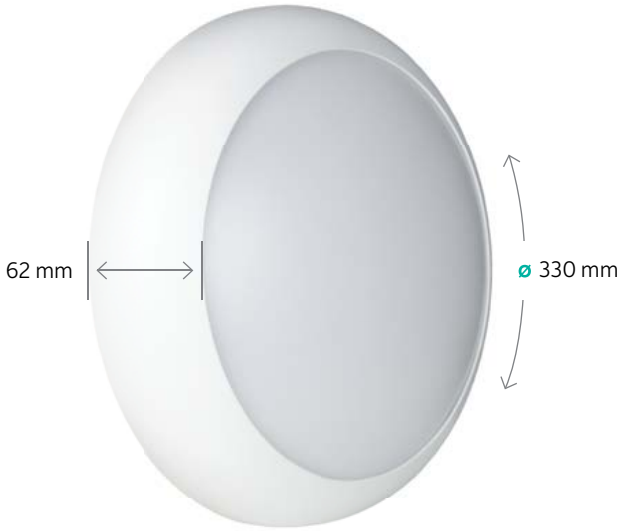

Uniseal is available in two lumen outputs with the same size body:



Open black option



Eyelid black option



Opal diffuser



Round design



Side conduit **entry**



Anti tamper screws

Options available:

- Lumen output: 1200, 2200
- Colour temp.: Selectable, 3000-5000K
- Body colour: White, Black
- Surface mount
- Microwave sensor
- Beam angles: 120°
- Body options: Open, Eyelid
- Vertical mount
- Emergency

Specification:

- LED chip / CRI: Illuma, CRI >80
- Wide beam
- Dimming options: DALI 2, Casambi, ON/OFF
- IP rating: IP65
- Impact resistant: IK10

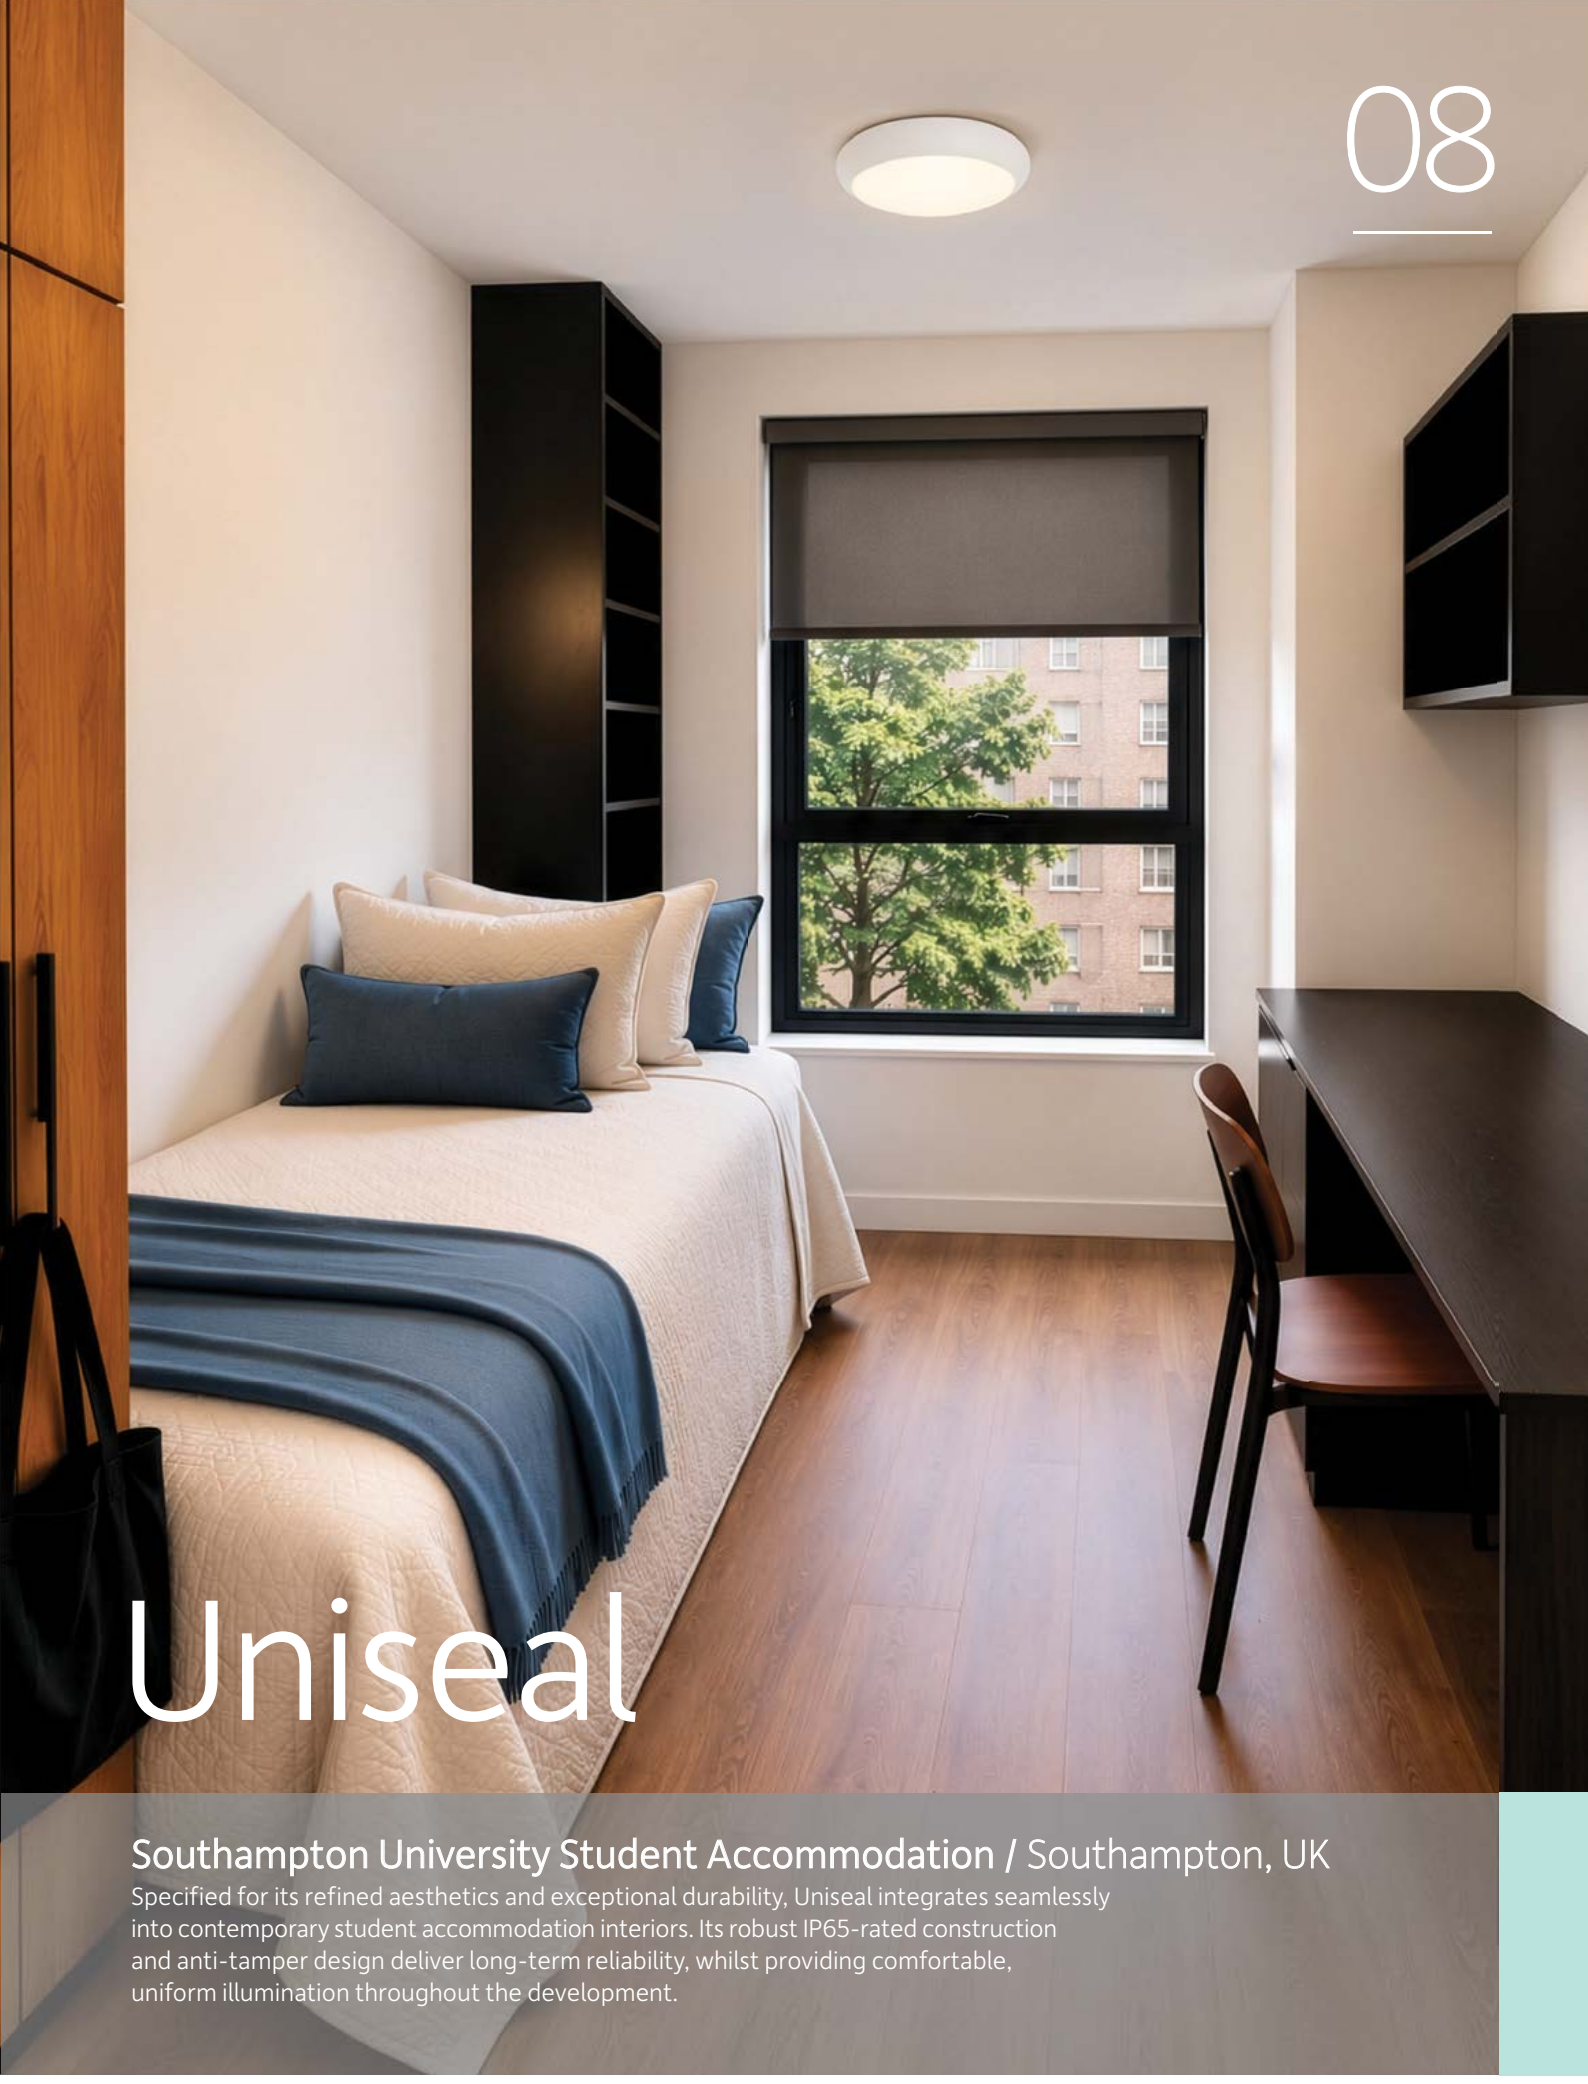

Uniseal

Southampton University Student Accommodation / Southampton, UK

Specified for its refined aesthetics and exceptional durability, Uniseal integrates seamlessly into contemporary student accommodation interiors. Its robust IP65-rated construction and anti-tamper design deliver long-term reliability, whilst providing comfortable, uniform illumination throughout the development.

Upline

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/upline**

A slim direct and bi-directional wall luminaire delivering low-glare illumination for modern interiors. Its IP54 rating also makes it suitable for selected exterior applications.

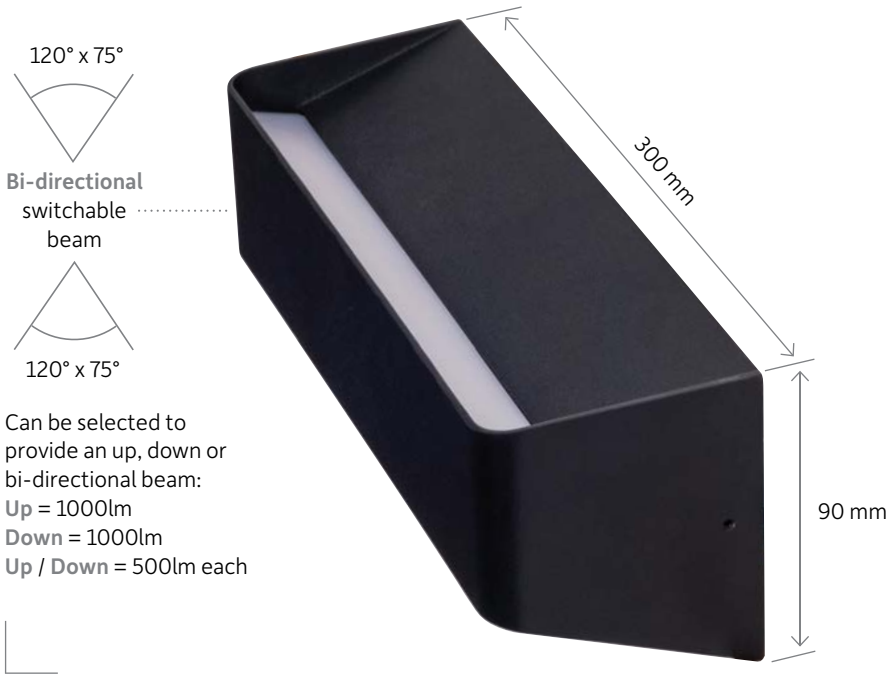

Can be selected to provide an up, down or bi-directional beam:
Up = 1000lm
Down = 1000lm
Up / **Down** = 500lm each

Upline is a slim, unobtrusive wall light that is suitable for interior or exterior use:



White option



Black option



Straight on view of front profile



Side profile



View of top diffuser

Options available:

Lumen output: 1000

Colour temp.: 3000K, 4000K

Body colour: White, Black

Beam angles: 120 x 75°

Body size: 1 size

Vertical mount

Specification:

LED chip / CRI: Citizen CRI >80

Bi-directional

IP rating: IP54

Anti-glare

Dimming: Leading & trailing edge

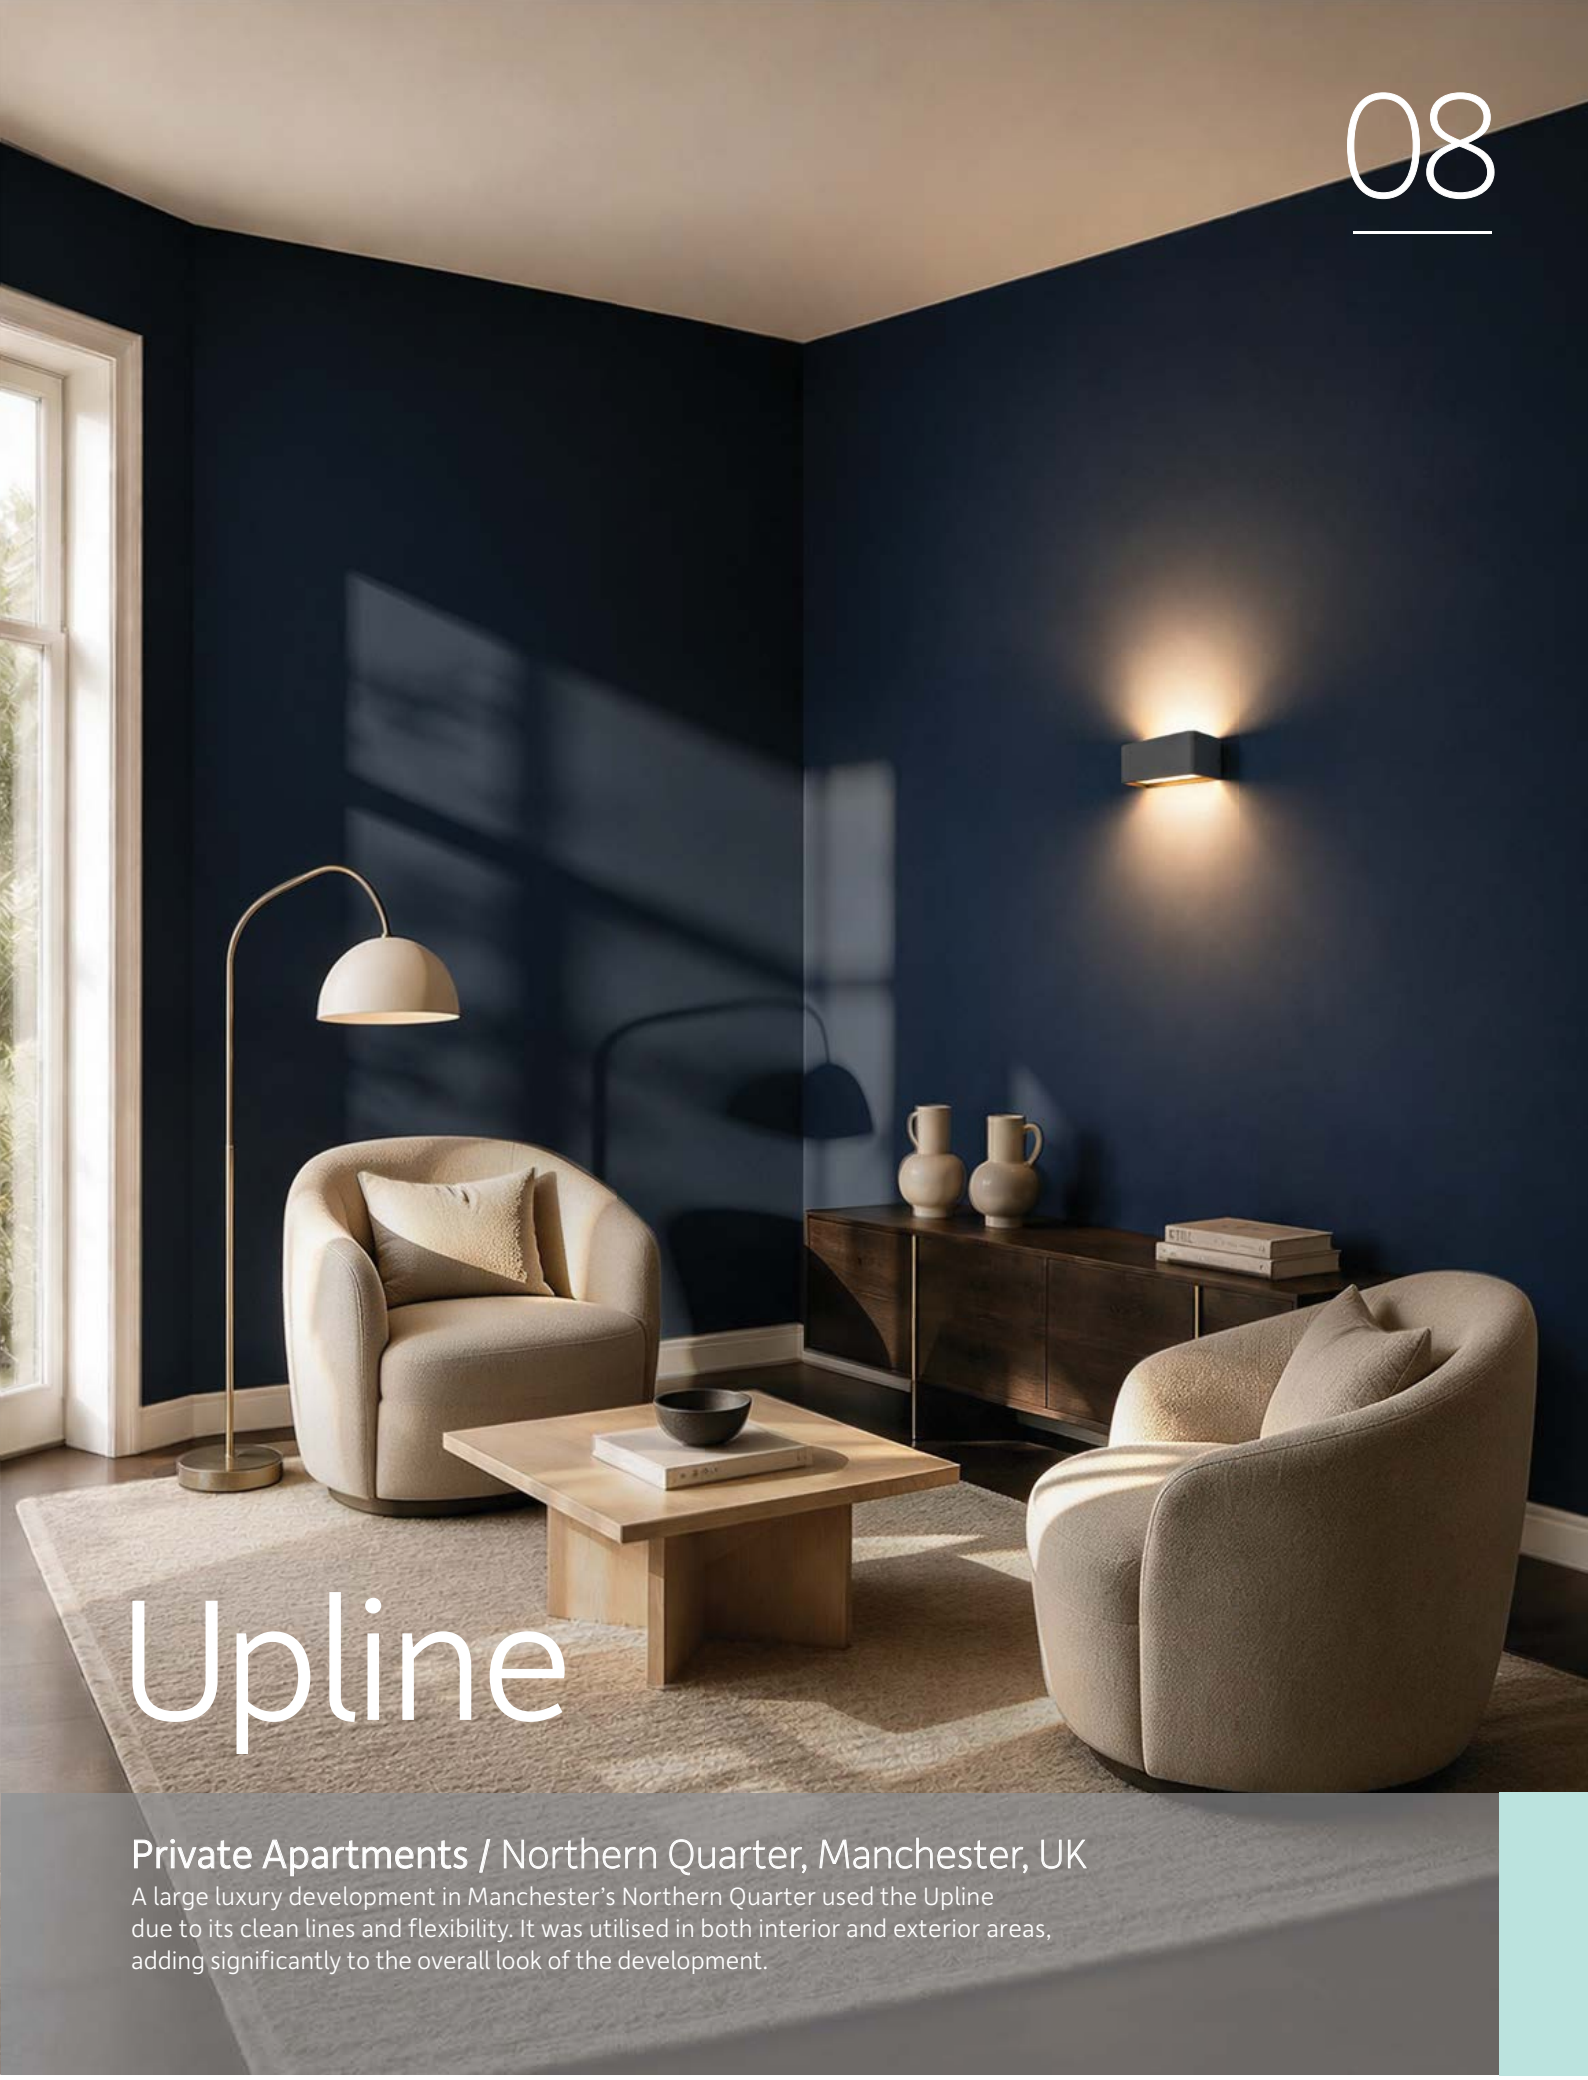

Upline

Private Apartments / Northern Quarter, Manchester, UK

A large luxury development in Manchester's Northern Quarter used the Upline due to its clean lines and flexibility. It was utilised in both interior and exterior areas, adding significantly to the overall look of the development.

Exterior

Illuma's **Signspot** provided an ideal solution for **Wilton House,** it's controlled beam providing precise optical control to highlight the dramatic architectural features of the historical estate.

Industry case study /

Wilton House

Wiltshire, UK

Wilton House is one of England's most distinctive historic estates, renowned for its classical architecture, intricate stonework and rich heritage /

As part of the exterior lighting, **Illuma** Signspots were used to illuminate the Earl of Pembroke statue positioned prominently above the main entrance. The challenge was to draw attention to the sculpture after dark without overwhelming the surrounding architecture.

The controlled beam of the Signspot allows light to be directed precisely onto the statue, creating a strong focal point and revealing the form, detail and texture of the sculpture from below. The result is a dramatic contrast against the night sky, helping the figure stand out while maintaining a refined and considered appearance.

Its compact design and precise optical control made Signspot particularly well suited to the application, delivering effective accent lighting from a discreet position.

The finished installation gives the entrance a striking presence after dark, with the illuminated Earl of Pembroke providing a memorable focal point and demonstrating how carefully positioned architectural lighting can enhance the character of a historic setting.





Exterior product range

09

A unique range of stylish exterior solutions, ideal for environments requiring mood and feature lighting.



Signspot 154



Covert 156



Terrazzo 158



SignLED 160

Signspot

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/signspot**

A robust IP67-rated exterior spotlight featuring variable beam control. Ideal for illuminating signage, architectural features and landscaping where flexibility and durability are essential.



Signspot is a high quality adjustable beam exterior spotlight:



Allen key bolt lock



Mounting bracket included



Optic



IP67 quality gland



Ground spike included



IP67 rated (waterproof)

Options available:

Lumen output	Colour temp.	Body colour	Ground spike
1000	3000K	Anthracite Grey	Included

Beam angles	Body size	Surface mount
15 to 36°	1 size	

Specification:

LED chip / CRI	Variable beam
CREE CRI >80	

IP rating	Adjustable
IP 67	

09



Signspot

Wilton House / Wiltshire, UK

Wilton House is one of England's most distinctive historic estates, renowned for its classical architecture, intricate stonework and rich heritage. As part of the exterior lighting scheme, Signspot provides precise illumination to the Earl of Pembroke statue above the main entrance, enhancing a key architectural focal point after dark.

Covert

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/covert**

A robust exterior floodlight designed for the efficient illumination of façades, circulation routes and building perimeters. Combining high performance with a compact architectural profile.



Covert
is a high quality adjustable exterior spotlight:



Adjustable wall bracket



Rear cable gland



Asymmetric optic



Slimline profile



Integrated heatsink



Photocell

Options available:

Lumen output: Selectable — 3570 5600 7500

Colour temp.: Selectable — 3000-4000-5000K

Surface mount

Beam angles: 55° Asymmetric

Body size: 1 size

Body colour: Anthracite Grey

Vertical mount

Specification:

LED chip / CRI: Illuma CRI >80

Photocell

Adjustable

IP rating: IP66

Impact resistant: IK08

09

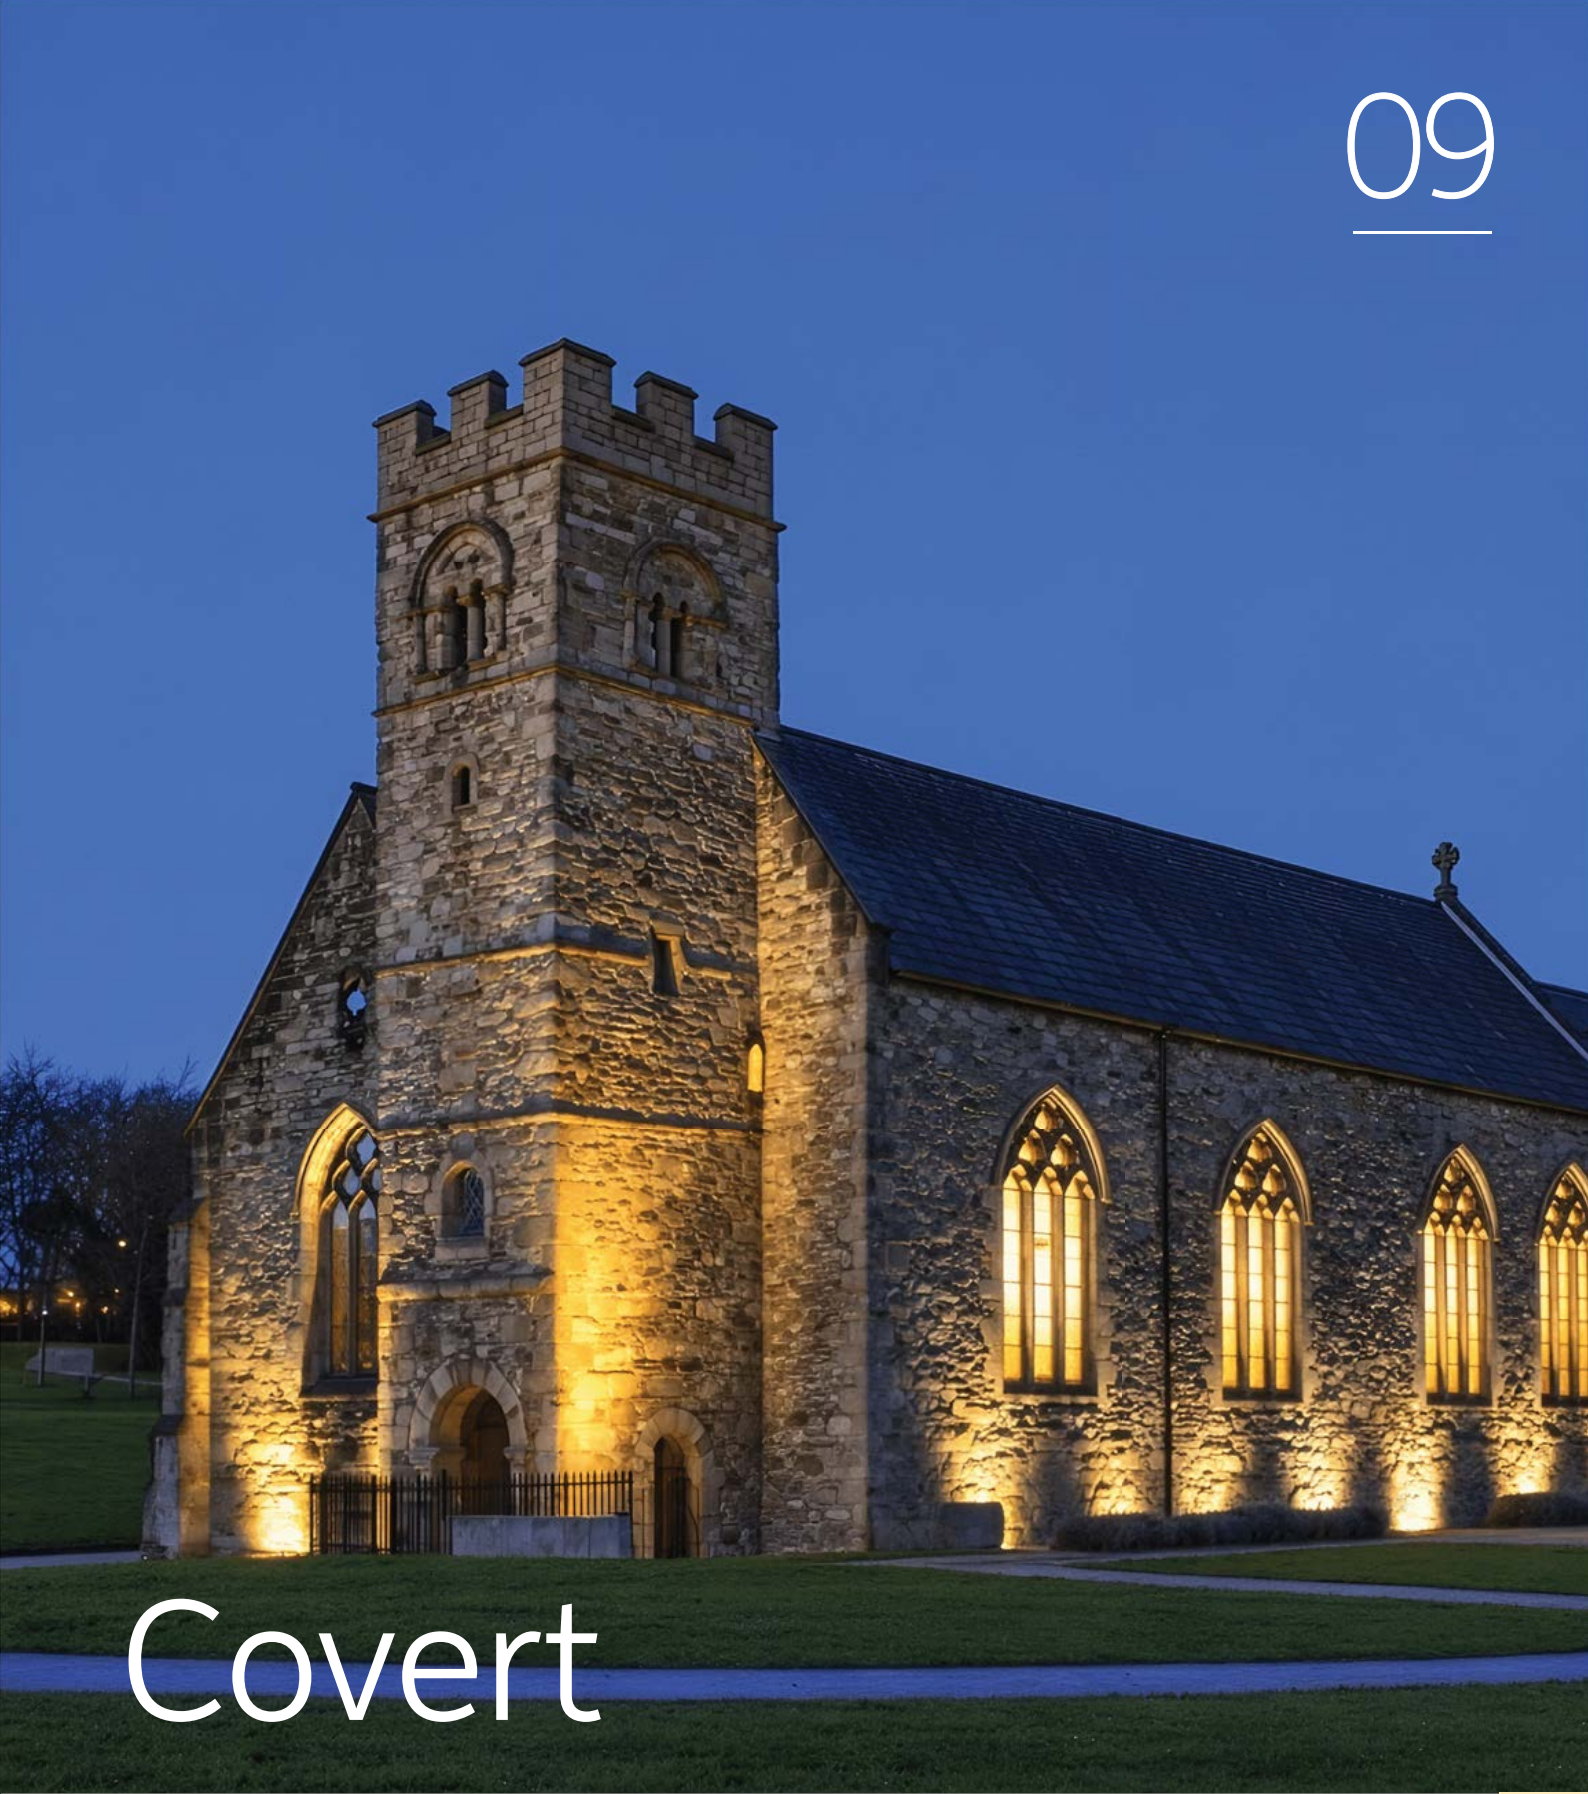

Covert

St. Matthew's Church / York, UK

The church combines traditional stone architecture with a prominent setting that establishes it as a recognisable feature within the surrounding landscape. Covert provides controlled façade illumination that highlights texture and architectural detail, creating an inviting presence whilst respecting the character of the building.

Terrazzo

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/terrazzo**

A contemporary exterior wall luminaire providing controlled asymmetric illumination with excellent visual comfort. Ideal for pathways, entrances and public realm applications.



Terrazzo
IP65 rated exterior wall light:



Black body



Rear or side entry



Asymmetric lens technology



Unique angled hood design



Surface mounted profile

Options available:

Lumen output
Selectable
2500 min
4300 max

Colour temp.
Selectable
3000-4000-6000K

Body colour
Black

Beam angles
120°
Asymmetric

Body size
1 size

Vertical mount

Specification:

LED chip / CRI
Illuma
CRI >80

Photocell

Anti-glare
No Uplight

IP rating
IP 65

Impact resistant
IK 08

Emergency

09

Terrazzo



Horizon Distribution Hub / Leeds, UK

Defined by bold geometric forms and a contemporary material palette, the development establishes a strong architectural presence within its surroundings. Terrazzo enhances the façade with controlled illumination, emphasising depth, texture and form whilst preserving a clean visual appearance.

SignLED

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/signled**

A versatile lighting solution developed specifically for illuminated signage. Available in multiple lengths and colour temperatures for consistent and uniform light distribution.

Custom colours

Custom colour finishes available on request



Body rotates 355°

***Note:** Other lengths are available on request (Refer to table below)

SignLED comes in two colours and a range of sizes:



300mm wall brackets included



High quality metal glands



Magnifying optic



750mm of flex included, fed into the left side (viewed from street)



Adjustable arms

Specification:

Lumen output

XS	447	497
S	1098	1221
M	2198	2442
L	3298	3663
XL	3663	4070

Colour temp.

3000K
6000K

Beam angles

120°

Body colour

White
Black

Surface mount

Vertical mount

Body sizes / Length (mm)

XS	S	M	L	XL
610	1524	3048	4572	6096

LED chip / CRI

Illuma CRI >80

IP rating

IP66

Adjustable

09



SignLED

Chops / London, UK

A contemporary destination for dining and social interaction, the interior balances industrial character with refined architectural detailing. SignLED blends effortlessly into the minimalist design language, delivering subtle illumination that complements the space without distracting from the architecture.

Emergency

Illuma's **3-Circuit Track** provided an ideal solution for the **Lakeside Garden Centre** enabling a flexible track layout that luminaires can be positioned to suit changing retail displays, while the **EMLUX Duo** remains carefully integrated into the overall installation.

Industry case study /

Lakeside Garden Centre

Garden & Retail / Warminster, UK

Lakeside Garden Centre combines a bright, open retail environment with a wide variety of displays, from furniture and homewares to seasonal products and planting / With such a flexible space, the lighting needed to provide effective everyday illumination while also integrating emergency lighting in a clean and unobtrusive way.

Illuma's **3-Circuit Track system** provided the backbone of the installation, allowing general, accent, feature and emergency lighting to be incorporated within the same flexible layout.

Concepta spotlights and track-mounted **Linia Blade T** luminaires provide the main retail lighting, while **Ambit pendants** introduce a decorative feature above key areas.

A major part of the installation was the integration of emergency lighting directly onto the track. **EMLUX Duo** & **EMLUX Slim emergency luminaires** are positioned throughout the space, providing emergency illumination while maintaining the visual consistency of the wider track installation. By mounting the emergency fittings onto the same track, the ceiling remains clean and coordinated, avoiding the need for a separate network of visually intrusive emergency luminaires.

At exit points, **EMLUX Sign** provides clear directional identification, completing an emergency lighting approach that works alongside the architectural lighting rather than appearing as an afterthought. The result is a cohesive lighting solution in which everyday retail lighting, feature lighting and emergency provision work together seamlessly, demonstrating how **Illuma**'s **track-based emergency products** can deliver both compliance and a considered architectural appearance.



Lakeside Garden Centre



Garden & Retail

Emergency product range

10

A reliable range of designated emergency solutions for many diverse applications and environments.



Emlux Duo 164



Emlux Slim 166





Emlux Blade 168



Emlux Discrete 170

Emlux Sign 174



Emlux Twinspot 172

Emlux Duo

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/emlux-duo**

A non-maintained emergency luminaire suitable for both track and surface mounting. Providing installation flexibility and dependable emergency illumination across a wide range of applications.

Custom colours

Custom colour finishes available on request

Non-maintained: Comes on when the power supply to the lighting fails



Note: Auto Self Test runs periodically, including during the night and automatically carries out all weekly / annual tests

Emlux Duo is a flexible Non-maintained Emergency that is Auto Test as standard:



Black surface option



White surface option



Unobtrusive design



Track mounted option



Remote test controller



Surface is BESA mountable

Options available:

Lumen output
150

Body colour
White
Black

Surface mount

Track mount

Beam angles
Open 125°
Corridor 145 x 75°

Body size
1 size

Control options
DALI 2

Specification:

LED chip / CRI
Illuma
CRI >80

Emergency

IP rating
IP20

Adjustable

Accessories
Remote



Emlux Duo

Joe & The Juice / Oxford Circus, London, UK

Located in one of London's busiest retail destinations, Joe & The Juice offers a vibrant setting where customers can meet, work and relax. Emlux Duo provides discreet emergency illumination that integrates seamlessly into the interior architecture.

Emlux Slim

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/emlux-slim**

A slimline track-mounted emergency luminaire with interchangeable lens options and Auto Test functionality. Designed for retail, commercial and leisure environments requiring a discreet architectural emergency lighting solution.

Custom colours

Custom colour finishes available on request

Non-maintained:
Comes on when the power supply to the lighting fails

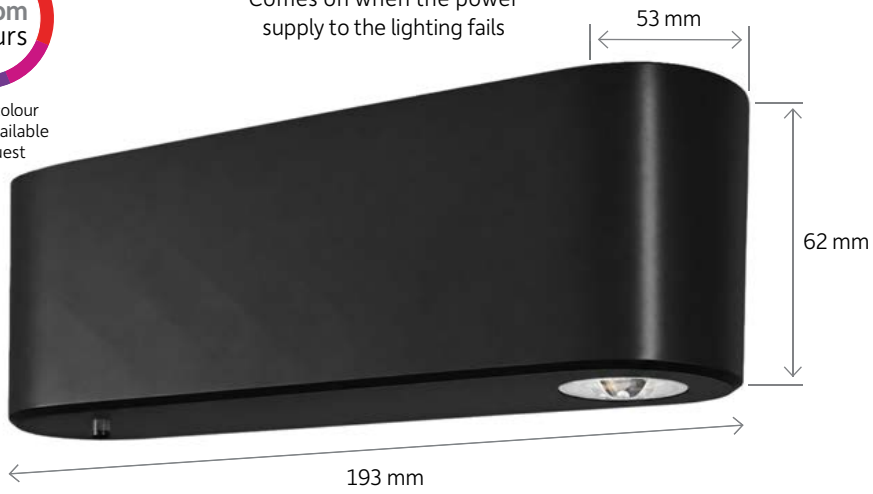

Note: Auto Self Test runs periodically, including during the night and automatically carries out all weekly / annual tests

Emlux Slim is a Non-maintained Emergency that is Auto Test as standard:



Black option



White option

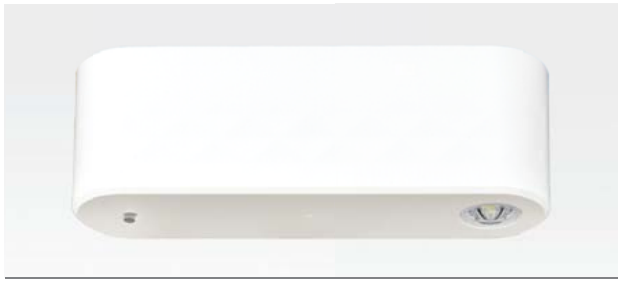

Slimline design



Interchangeable lenses



Track mounted

Options available:

Lumen output
380

Body colour
White
Black

Track mount

Option styles
Open
Corridor
(inc. in box)

Beam angles
Open 125°
Corridor 145 x 75°

Body size
1 size

Specification:

LED chip / CRI
Illuma
CRI >80

Emergency

IP rating
IP 20

10



Emlux Slim

Nisa Local / Hertfordshire, UK

Designed to blend effortlessly with the store's architectural lighting scheme, Emlux Slim provides discreet emergency illumination without compromising the visual appeal of the retail environment. Its compact track-mounted design delivers reliable emergency lighting performance whilst preserving the clean, contemporary aesthetic of the space.

Emlux Blade

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/emlux-blade**

A maintained or non-maintained emergency escape route sign available in track or surface-mounted formats. Designed to provide clear wayfinding during evacuation procedures.

Note: The correct directional legend must be specified when ordering

Maintained:
Always on and stays on when the power supply to the lighting fails

Non-maintained:
Comes on when the power supply to the lighting fails



Emlux Blade
comes in a variety of styles and options:



Track mount black option



Track mount white option



Slim profile



Robust design



Test button



Surface mount black option

Options available:

Body colour
White
Black

Surface mount

Suspended

Body size
1 size

Track mount

Specification:

LED chip / CRI
Illuma
CRI >80

Emergency

IP rating
IP 20

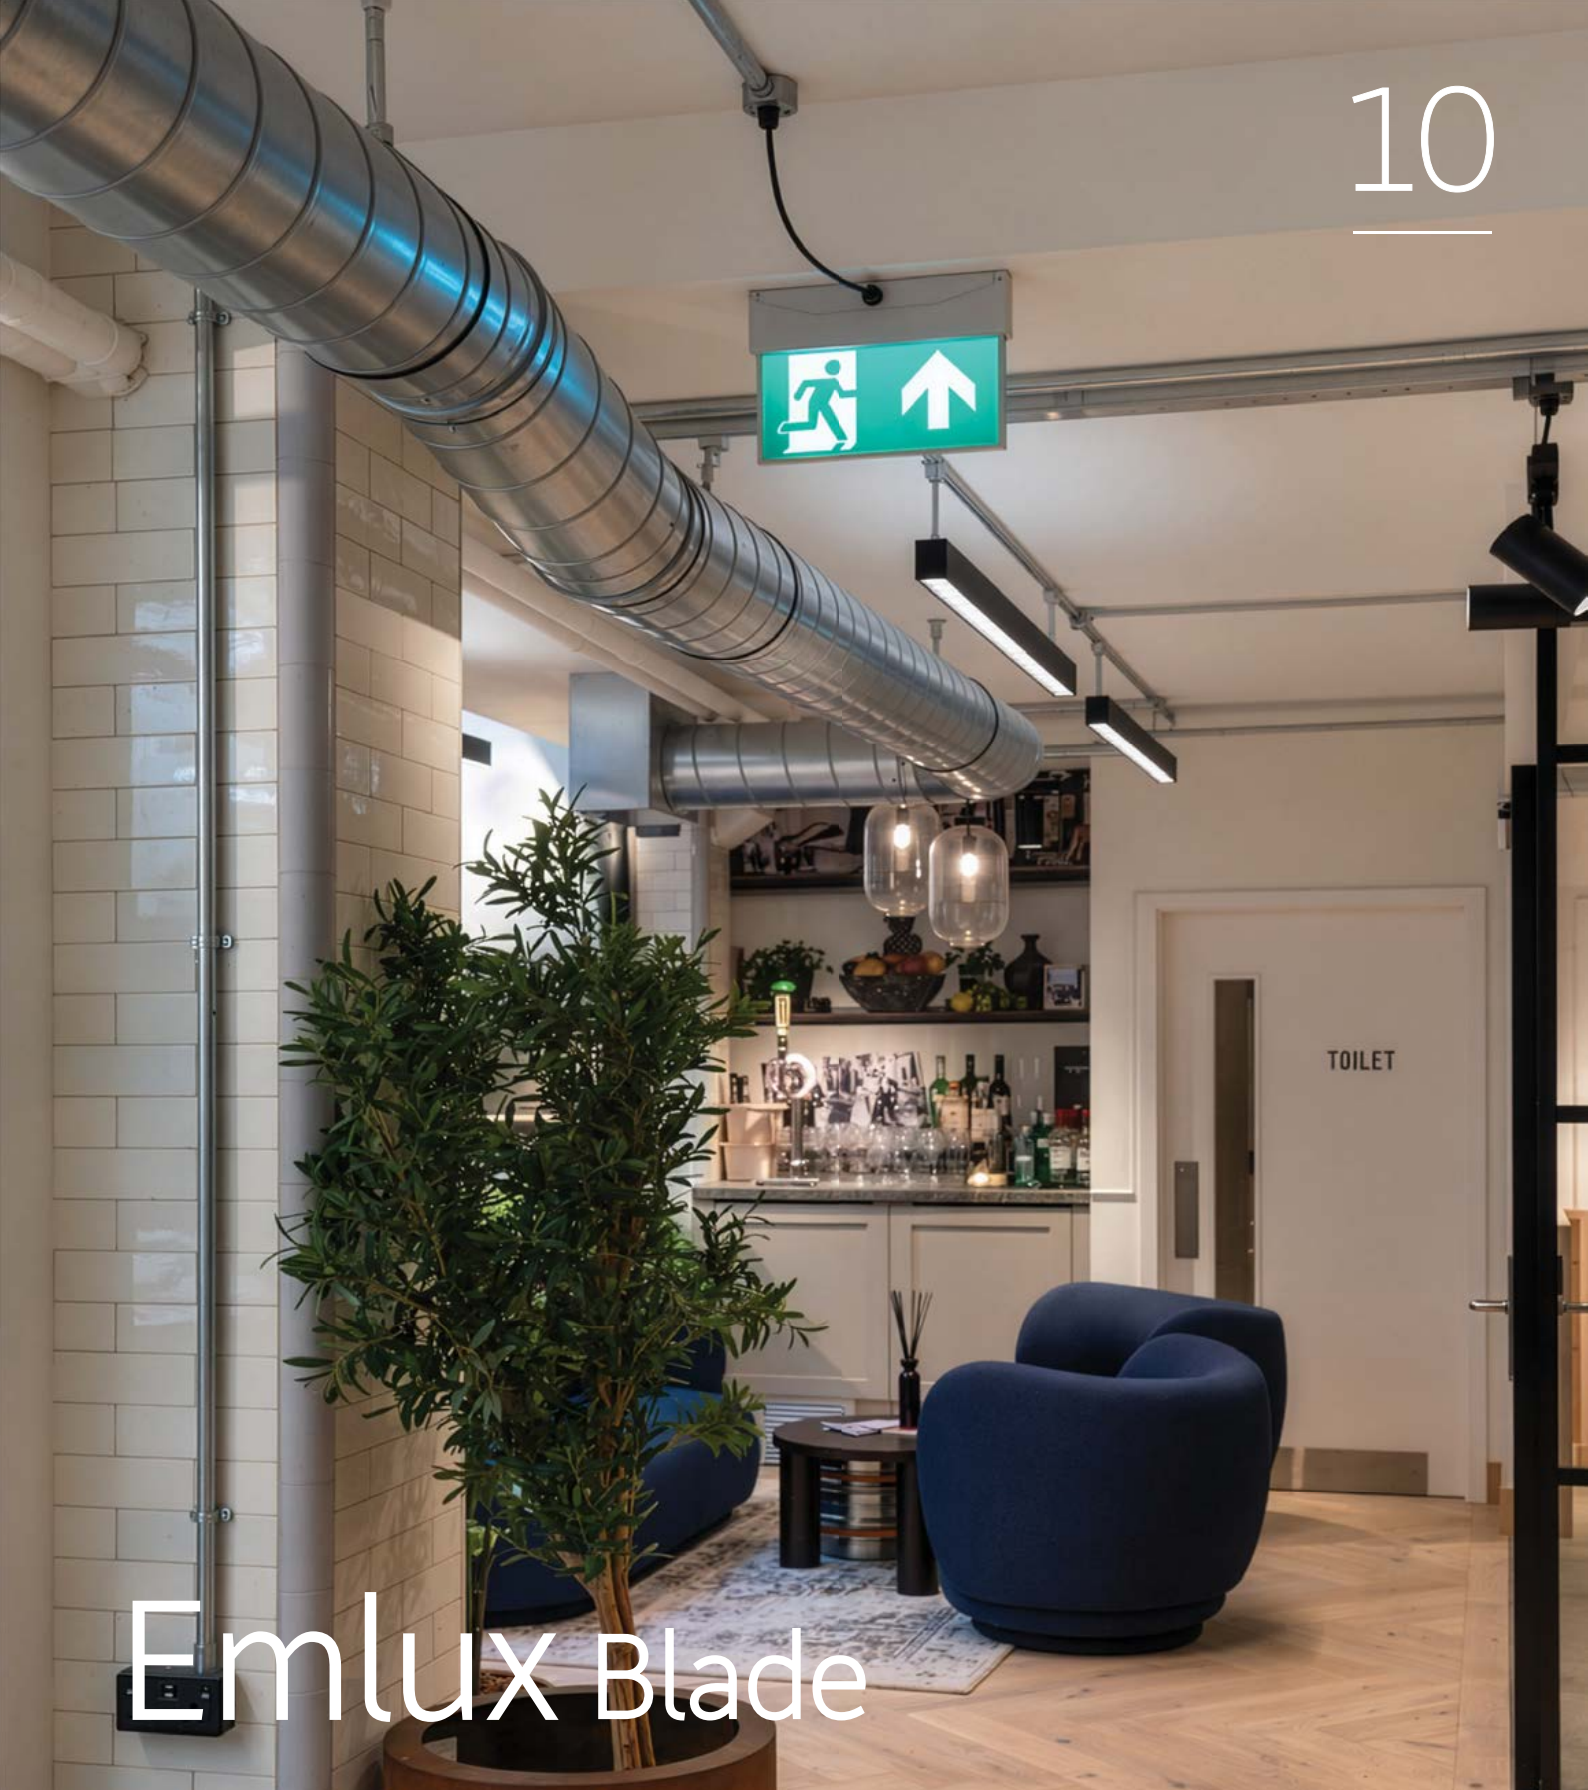

Emlux Blade

Joe & The Juice Head Quarters / Dean Street, London, UK

With exposed services, clean lines and a contemporary aesthetic, the interior demanded an emergency lighting solution that complemented the architecture rather than competing with it. Emlux Blade provides clear escape route guidance while maintaining the visual integrity of the space, delivering a discreet and design-conscious approach to emergency wayfinding.

Emlux Discrete

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/emlux-discrete**

A compact recessed emergency luminaire featuring Auto Test functionality as standard. Designed for subtle integration into architectural environments where visual impact must be minimised.

Custom colours

Custom colour finishes available on request

Non-maintained: Comes on when the power supply to the lighting fails



Note: Auto Self Test runs periodically, including during the night and automatically carries out all weekly / annual tests

Emlux Discrete is a small Non-maintained Emergency that is Auto Test as standard:



Open option 125° lens



Corridor option 145° x 75° lens



White Open option



Black Open option



Remote test controller



Through the hole battery pack

Options available:

Lumen output

150

Body colour

White

Black

Beam angles

Open 125°

Corridor 145 x 75°

Body size

1 size

Option styles

Open

Corridor

Specification:

LED chip / CRI

Edison

CRI >80

Cut-out Ø

35 mm

Recessed

IP rating

IP 20

Emergency

Accessories

Remote

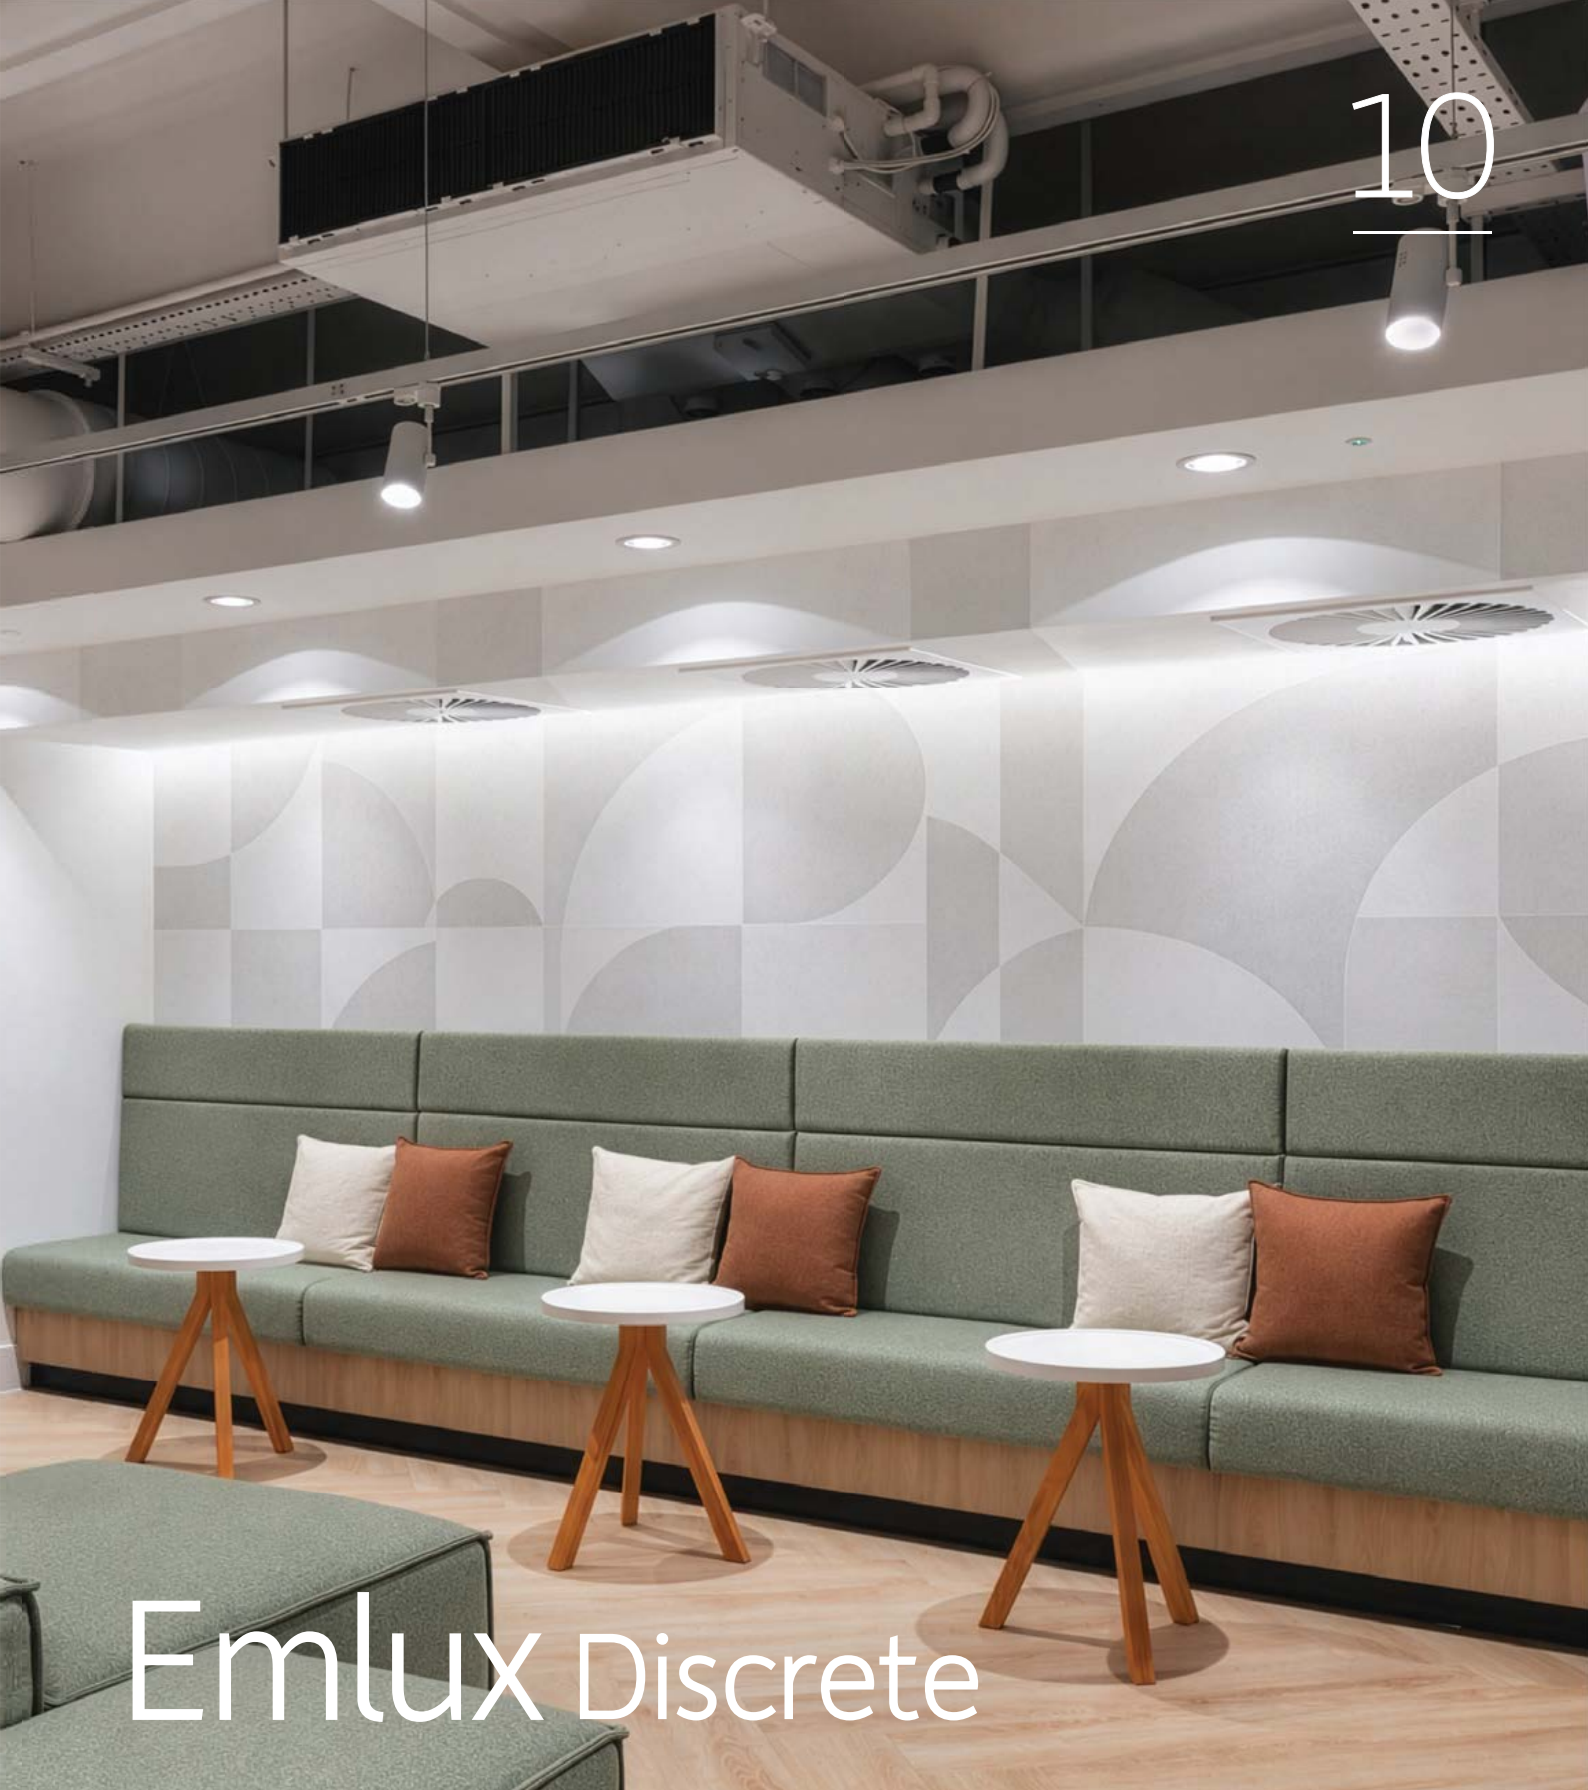

Emlux Discrete

Bramwell Financial Services / Liverpool, UK

Bramwell Financial Services occupies a contemporary workplace designed to project confidence, trust and professionalism. Emlux Discrete integrates seamlessly into the architecture, providing essential emergency illumination whilst maintaining clean visual lines throughout.

Emlux Twinspot

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/emlux-twinspot**

A maintained or non-maintained twin-head emergency luminaire suitable for track or surface mounting. Delivering dependable emergency illumination across a variety of applications.

Custom colours

Custom colour finishes available on request

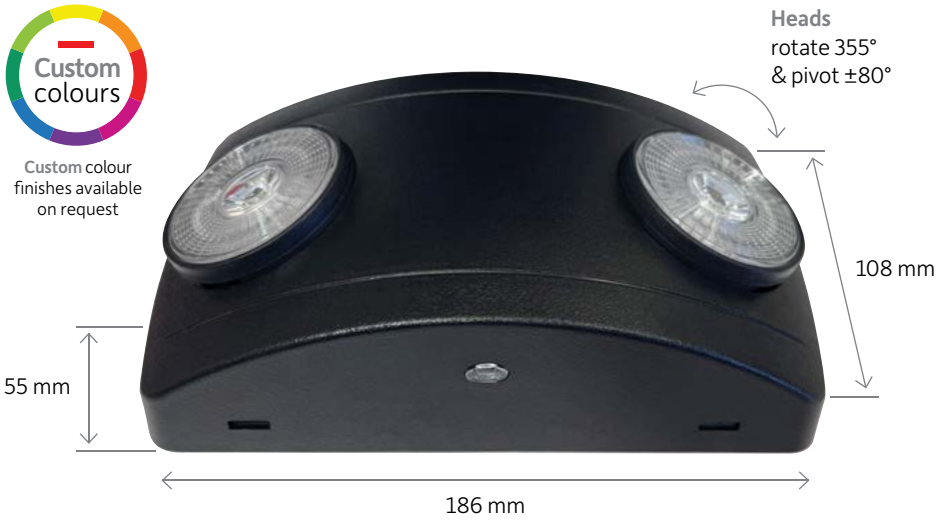

Maintained: Always on and stays on when the power supply to the lighting fails
Non-maintained: Comes on when the power supply to the lighting fails

Emlux Twinspot
is a Maintained and
Non-maintained product:



Black body



White body



Adjustable head with 30° beam



Heads rotate 355° & pivot ±80°



Inbuilt status indicator



Track mountable option

Options available:

- Lumen output: 2 x 110
- Body colour: White / Black
- Track mount
- Surface mount
- Beam angles: 30°
- Body size: 1 size
- Vertical mount

Specification:

- LED chip / CRI: Nichia CRI >80
- Emergency
- IP rating: IP20
- Adjustable
- Dimming option: DALI 2

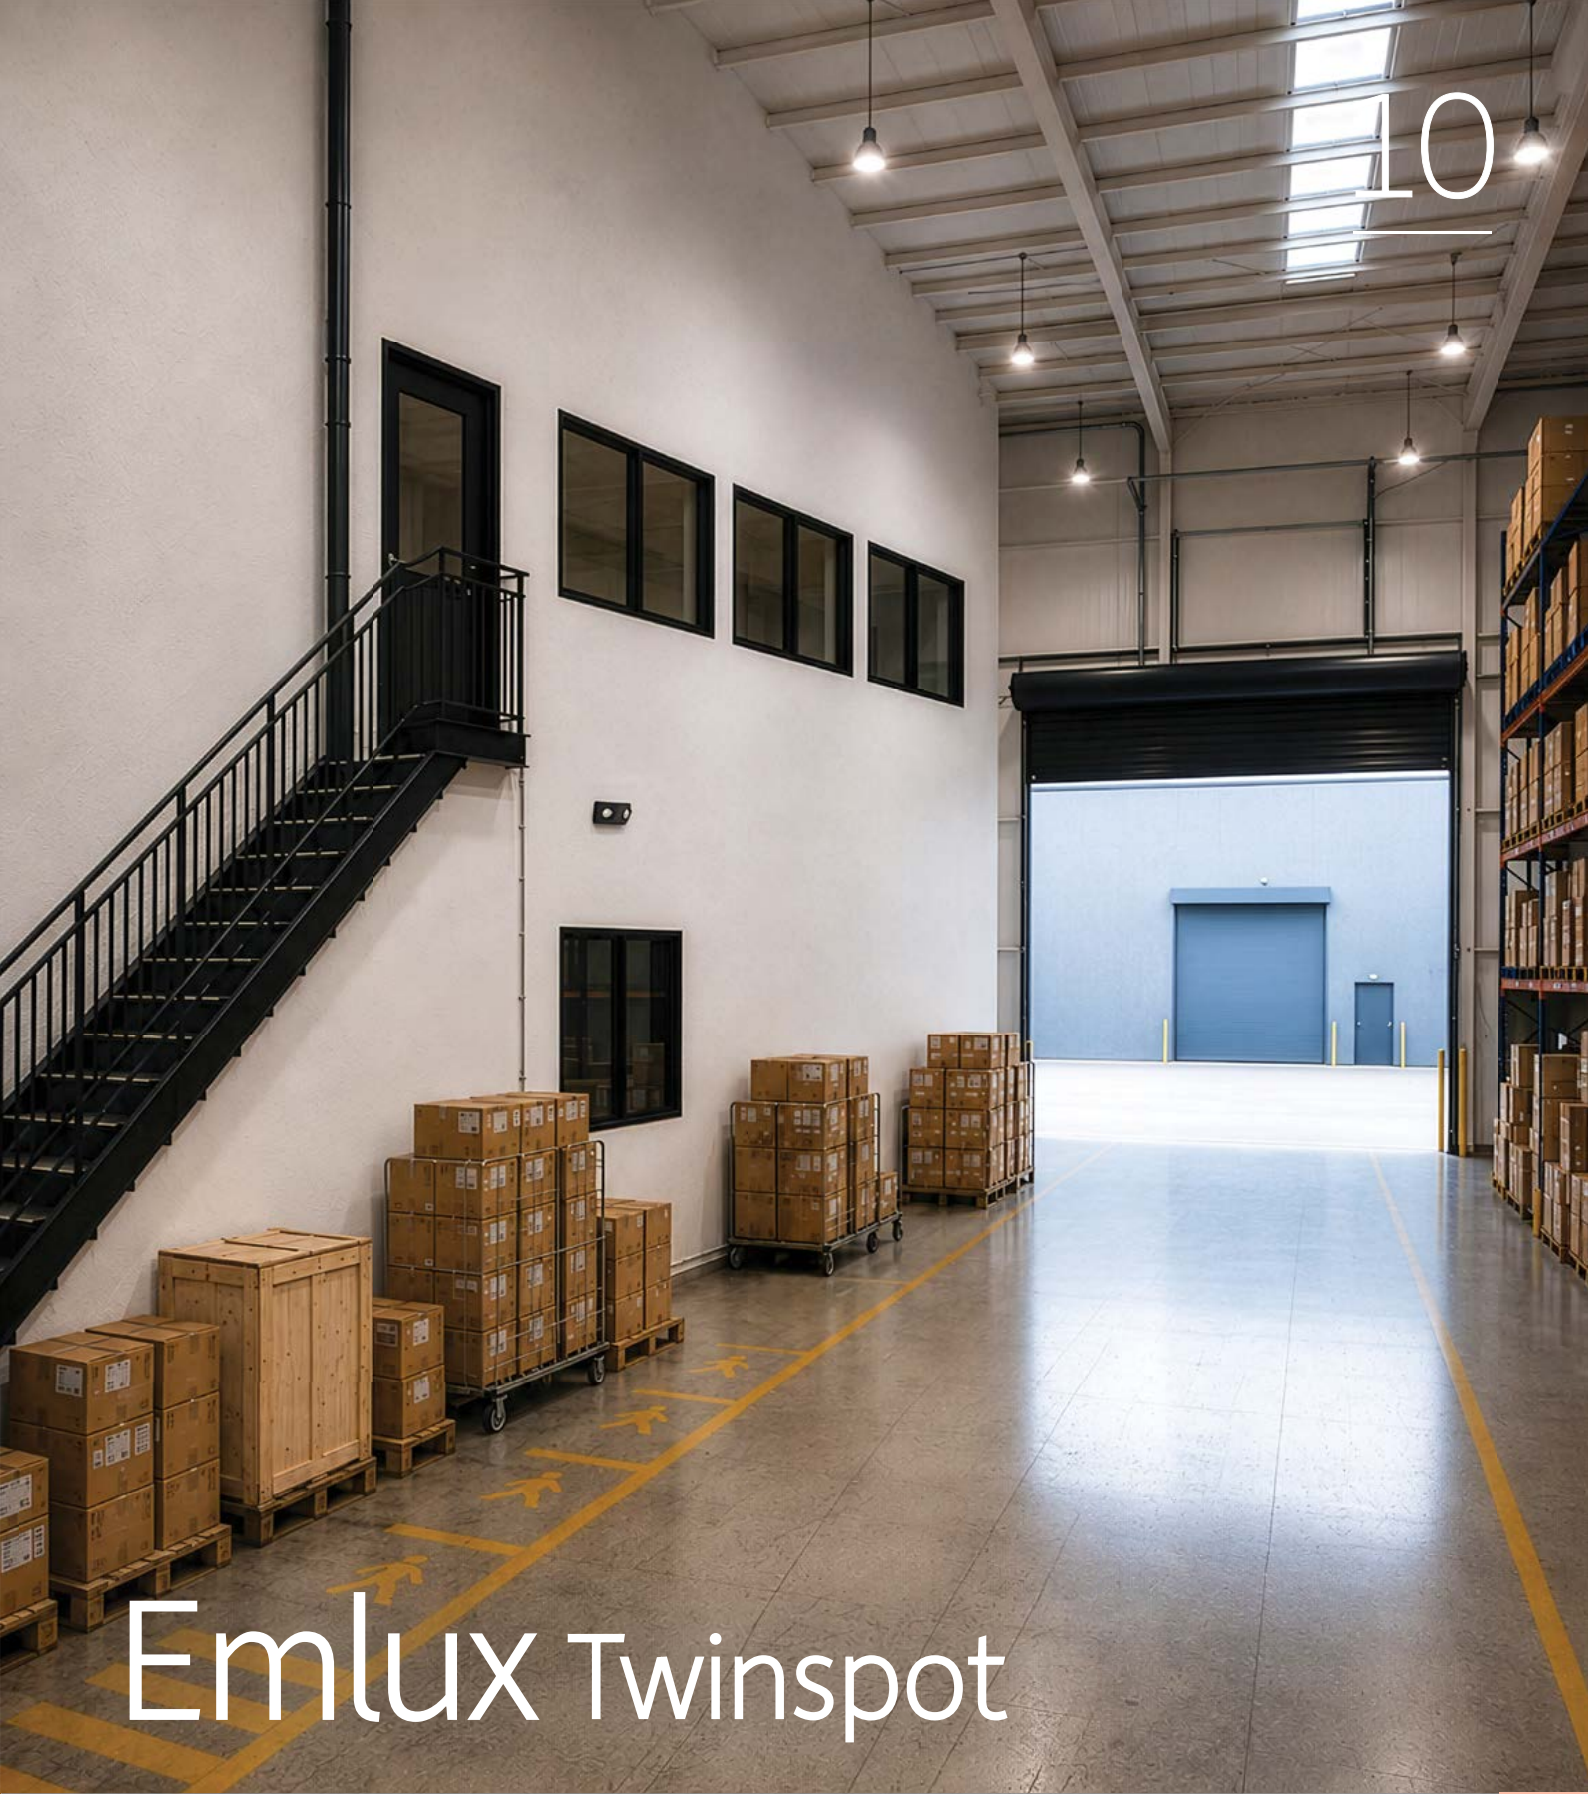

Emlux Twinspot

National Distribution Hub / Northampton, UK

Designed for large-scale industrial environments, Emlux Twinspot provides dependable emergency lighting for warehouse operations, ensuring clear escape route illumination and occupant safety in the event of a mains power failure.

Emlux Sign

For further information, technical details and downloads scan the **QR code** or visit **www.illuma.co.uk/emlux-sign**

A comprehensive range of maintained and non-maintained emergency escape route signs available with multiple legend options. Designed to support safe and effective evacuation.

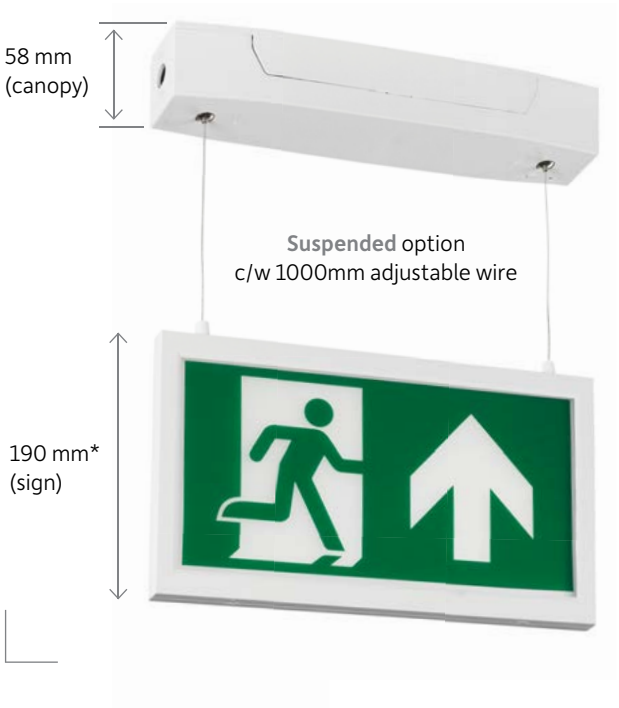

*Additional sizes available

	Length	W(H)	D
Suspended	330	248	58
Wall	333	134	75
Bulkhead	260	100	62

Maintained:
Always on and stays on when the power supply to the lighting fails
Non-maintained:
Comes on when the power supply to the lighting fails

Note: All versions include all legends apart from the Wall version which needs the legend specifying at the point of ordering

Emlux Sign
comes in a variety of styles and options:



Wall option*



Slim profile Bulkhead*



Robust clear cover



With included **legend** applied



Suspended option

Options available:

Body colour
White

Surface mount

Suspended

Option styles
Bulkhead
Suspended
Wall

Body sizes
3 sizes

Vertical mount

Specification:

LED chip / CRI
Nichia
CRI >80

Emergency

IP rating
IP 20

10



Emlux Sign

Boo. Handcrafted Burgers / Nottingham, UK

Boo adds a modern twist on classic American burgers, using only the freshest ingredients. Emlux Sign provides essential emergency illumination whilst ensuring compliance without conflicting with the neon-themed corridor lighting.

Index by cutout

Cutout (mm)	Recess (mm)	Product range name	Type	Page
35	30	Emlux Discrete	–	170
35	85	Infinia Mini	–	116
60	30	2ube Pendant	Mono Point	140
67	43	Torp	Mono Point	26
67	43	Concepta	Mono Point	28
75	60	Probeam Frame Mini	Mono Point	42
70	75	Project 90 Open	625lm	98
70	105	Project 90 Open	1250lm	98
70	75	Project 90 Gimbal	625lm	102
70	105	Project 90 Gimbal	1250lm	102
75	105	Project 90 Wallwash	625lm	104
75	140	Project 90 Wallwash	1250lm	104
75	105	Project 90 Cone	625lm	100
75	140	Project 90 Cone	1250lm	100
75	95	Proseal F	625lm	106
75	130	Proseal F	1250lm	106
80	110	Infinia	Round, 900lm & 1200lm	112
80	110	Infinia	Round Trimless, 900lm & 1200lm	112
80	115	Unilux	Up to 170mm using its adjustable plate	130
80 x 80	110	Infinia	Square, 900lm & 1200lm	112
80 x 80	110	Infinia	Square, Trimless 900lm & 1200lm	112
90	30	Disk	Pendant with Mono Point	146
100	130	Infinia	Round, 2200lm	112
100	130	Infinia	Round Trimless, 2200lm	112
100 x 100	130	Infinia	Square, 2200lm	112
100 x 100	130	Infinia	Square Trimless, 2200lm	112
110	45	Twizzle	–	96
120	105	Arc	–	118
120	80	Highlux Fixed	–	122
125	165	Infinia	Round, 2600lm	112
125	165	Infinia	Round Trimless, 2600lm	112
125 x 125	165	Infinia	Square, 2600lm	112
125 x 125	165	Infinia	Square Trimless, 2600lm	112
140	80	Highlux Gimbal	–	124
150	40	Hexseal	2000lm	128
170 x 170	180	Framelight	Single	120
170	55	Lightseal	1700lm	132
200	40	Hexseal	3000lm	128
210	55	Lightseal	2200lm	132
320 x 170	180	Framelight	2 Way	120
480 x 170	180	Framelight	3 Way	120
504 x 45	45	Linia Blade R	2300lm	66
1170 x 45	45	Linia Blade R	3000lm	66

Index by product code

Product code	Product range name	Page
3	3D Ceiling Adaptor Ring	134
B	Uniseal	148
D102	Twizzle	96
D104	Twizzle	96
D100	Project 90 Open	98
D101	Project 90 Open	98
D12	Project 90 Gimbal	102
D13	Project 90 Wallwash	104
D15	Project 90 Cone	100
D16	Project 90 Cone	100
D17	Project 90 Cone	100
D18	Proseal F	106
DA	Arc	118
DF	Framelight	120
DH	Hexseal	128
DJ1	Highlux Fixed	122
DJ2	Highlux Gimbal	124
DL	Lightseal	132
DR1	Infinia Mini	116
DR2	Infinia	112
DR3	Infinia	112
DR4	Infinia	112
DRT	Infinia	112
DS200	Highlux Surface	126
DS209	Infinia	112
DS21	Infinia	112
DS3	Infinia	112
DS4	Infinia	112
DST	Infinia	112
DU	Unilux	130
E1	Emlux Sign	174
E2	Emlux Sign	174
E4	Emlux Sign	174
EF	Covert	156
EMLUX1	Emlux Discrete	170
EMLUX2	Emlux Duo	164
EMLUX3	Emlux Twinspot	172
EMLUX4	Emlux Blade	168
EMLUX5	Emlux Slim	166
EMLUX-R	Emlux Duo / Emlux Discrete	164/170
ES	Signspot	154
ET	Terrazzo	158
F	Fire Hoods	108
H	Probeam Select	38
LC	Cubix	70
LF	Fluoresa	68
LN	Linia Blade T	64
LR	Linia Blade R	66
LS	Linia Blade S	60
P11	Disk	146
P12	Ambit	138
P22	Disk	146
P25	Ambit	138
P33	Disk	146
P38	Ambit	138
PP	Ambit	138
PU	Prismalo	144
S	Signled	160
T1	1-Circuit Track 230V	87
T2	1-Circuit Track 230V	87
T31	Topspot E27	56
T32-	1-Circuit Track 230V	87
T325	Rocket E27	54
T326	Rocket E27	54
T328	Rocket E27	54
T33	1-Circuit Track 230V	87
T34	Lumapar	50
T35(	1-Circuit Track 230V	87
T351	Probeam	44
T352	Probeam Select	38
T372	Floodline	74
T373	Floodline	74
T374	Floodline	74
T378	Floodline	74
T37F	1-Circuit Track 230V	87
T38-B	1-Circuit Track 230V	87
T38-C	CLEVR	84
T38-S	1-Circuit Track 230V	87
T38-W	1-Circuit Track 230V	87
T39	1-Circuit Track 230V	87
T4-	1-Circuit Track 230V	87
T41	Topspot E27	56
T42	Rocket E27	54
T44	Lumapar	50
T451	Probeam	44
T452	Probeam Select	38
T47	Floodline	74
T8	1-Circuit Track 230V	87
TA	Ellipsa	48
TC	2ube Pendant / 2ube Pendant Shades	140/142
TD	1-Circuit Track 230V	87

Index by product code

Product code	Product range name	Page
TE	Reflecto	36
TF3	Probeam Frame	40
TF4	Probeam Frame	40
TFM	Probeam Frame Mini	42
TG	Grazr	72
TK	Torp	26
TM	Lumapar GU10	52
TQ31	Quadroled	78
TQ33	Quadroled Linear	76
TQ39	Quadroled Linear	76
TR	Robospot	34
TS1	3-Circuit Track 230V	89
TS21	3-Circuit Track 230V	89
TS23	3-Circuit Track 230V	89
TS24	3-Circuit Track 230V	89
TS29	3-Circuit Track 230V / Control Track 230V	89/91
TS32	3-Circuit Track 230V / Control Track 230V	89/91
TS34	3-Circuit Track 230V	89
TS35	3-Circuit Track 230V	89
TS36	3-Circuit Track 230V	89
TS37	3-Circuit Track 230V	89
TS38	3-Circuit Track 230V	89
TS39	3-Circuit Track 230V	89
TS40	3-Circuit Track 230V	89
TS41-	3-Circuit Track 230V / Control Track 230V	89/91
TS410	3-Circuit Track 230V	89
TS42	3-Circuit Track 230V	89
TS43	3-Circuit Track 230V	89
TS44	3-Circuit Track 230V	89
TS6	Control Track 230V	91
TSC	Control Track 230V	91
TSF	3-Circuit Track 230V	89
TSP	3-Circuit Track 230V / Control Track 230V	89/91
TSV	3-Circuit Track 230V / Control Track 230V	89/91
TT	Twinlux	46
TV	Vent / Vent Customisation	22/24
TX	Chameleon	32
TZ32	Concepta	28
TZ33	Concepta	28
TZ34	Concepta Maxi	30
TZ42	Concepta	28
TZ43	Concepta	28
TZ44	Concepta Maxi	30
TZ6	Concepta	28
U2	Disk	146
U3	Upline	150



illuma

Sills Road
Willow Farm Business Park
Castle Donington
Derbyshire
DE74 2US
United Kingdom

T +44 (0) 1332 818 200
F +44 (0) 1332 818 222
E sales@illuma.co.uk

www.illuma.co.uk



Aluminium. 100% recyclable.

Visit illuma.co.uk **View** C/20D

5 030785 158264

ISO 9001 QUALITY MANAGEMENT

UKAS MANAGEMENT SYSTEMS 0015

theLIA

WORLD LAND TRUST™

www.carbonbalancedpaper.com
CBP001952